

NOV 19 1965

AD 624370

RESEARCH PAPER P-194




MAGNITUDE AND DISTRIBUTION OF WEAPON EFFECTS FOR THE DESIGN OF SHELTERS FOR PROTECTION AGAINST FALLOUT

Unpublished DDC by DTIC...
Number...
and return to DTIC
Date...




H. A. Knapp

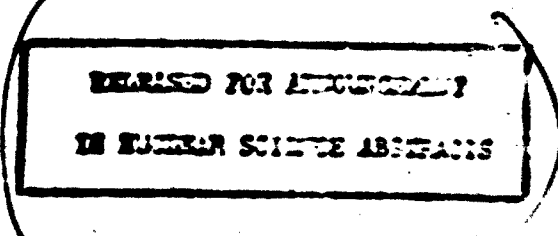

Code 123
PROCESSING COPY

JULY 1965

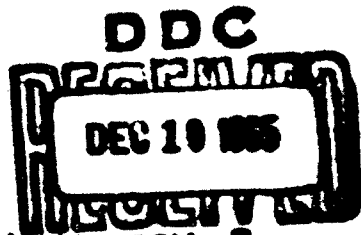

INSTITUTE FOR DEFENSE ANALYSIS
WEAPONS SYSTEMS EVALUATION DIVISION

Best Available Copy 20050228007



FOREWORD

On November 3, 1961, the Advisory Committee on Civil Defense of the National Academy of Sciences included the following recommendation in a letter to the Assistant Secretary of Defense for Civil Defense:

"With regard to the program as a whole, the Committee feels very strongly that it should be based on realistic and detailed planning assumptions for civil defense. We have, in our specific comments, urged the development of such assumptions. We believe that not only research, but all civil defense effort should be planned and carried out in conformance to the best possible premises concerning levels and types of enemy attack, and their effects on all parts of the nation. Planning assumptions would, furthermore, be simplified and made available to individuals and communities as guidance to assist them in planning their protective actions."

In the Department of Defense - Office of Civil Defense official publication FALLOUT PROTECTION, What to Know and Do About Nuclear Attack, it was subsequently stated:

"Many of the spaces in the central areas of large population centers would be exposed to destruction by blast and fire in the event of a nuclear attack. But the pattern of attack cannot be predicted, and existing shelter is more widely distributed in relation to population than appears to the casual observer. Further, this space is immediately available, and the cost of identification, marking, and stocking is less than \$4 per space."

After reviewing the Civil Defense program, the Military Operations Subcommittee of the House Committee on Government Operations issued a report on May 31, 1962, which reechoed the earlier recommendation made by the Advisory Committee on Civil Defense:

"Analyses of hazard probabilities and damage should be carried forward, not only on the basis of varying attack

assumptions, but on assumptions of varying levels and kinds of shelter protection--including protection against blast and thermal as well as fallout effects--in order to determine an optimum shelter program for the United States."

In March, 1965, the Office of Civil Defense issued Technical Memorandum 61-3 (Revised) defining a fallout shelter as "a structure, room, or space that protects its occupants from fallout gamma radiation, with a protection factor of at least 40".

The memorandum also states:

"Detailed DoD studies of the lifesaving potential of fallout shelters indicate that for the current time frame and for the foreseeable future, shelters with a protection factor of 40 could save over 90% of these persons who would otherwise die if unprotected against potential lethal radiation levels. . . . Computations indicate that decreasing returns in added lives saved per added dollar invested are obtained as PF's are increased significantly above 40. On a nationwide basis, therefore, it would be better life-saving potential per dollar for the same dollar expenditure, to obtain more shelter space of lower PF than only a few shelter spaces with a very high PF."

Guidance of the type suggested by the Academy Committee is still not available, and there appears, at present, to be no plans for making it available.

CONTENTS

SUMMARY AND CONCLUSIONS	1
PART I - TARGETING ASSUMPTIONS FOR ATTACKS AGAINST POPULATIONS	7
The Problem	7
Targeting for Maximum Population Kill	10
Additional Consequences of the Targeting Model	23
The Population of the United States	26
The Targeting Model Applied to a Specific Urban Area	31
PART II - THE INTENSITY AND DISTRIBUTION OF INITIAL AND RESIDUAL RADIATION	39
General Considerations	39
Radiation Dose Units	41
Equivalent Residual Dose (Biologically Effective Dose)	42
Initial Nuclear Radiation	44
Residual Nuclear Radiation	48
Doses and Dose Rates from a Uniform Distribution of Fission Products on the Ground	51
Contamination Levels and Accumulated Doses in an Idealized Fallout Pattern: Scaling with Yield and Wind	55
Meteorological Data for Use with Fallout Prediction Models	60
Doses and Dose Rates in Overlapping Fallout Patterns	62
APPENDIXES	
APPENDIX A - Distribution of Land Area by Density of Population	67

CONTENTS (Continued)

PENDIX B - Excerpt from Statement of Secretary of Defense, Robert S. McNamara Before the House Armed Services Committee on the Fiscal Year 1966-70 Defense Program and 1966 Defense Budget, February 18, 1965	85
PENDIX C - Clinical Features of Radiation Injury. .	93
PENDIX D - Pattern Dimensions and Areas for H+1 Hour Dose Rate Contours and Maximum Biological Dose (= 1 Week Dose)	99

SUMMARY AND CONCLUSIONS

To design a shelter which offers its prospective occupants a reasonable prospect of survival in the event of nuclear attack, it is necessary to make a quantitative estimate of the levels of blast, thermal pulse, initial radiation, and fallout to which the shelter location could reasonably be subjected. To this end, it is necessary to make an estimate of the numbers and yields of weapons which would be detonated in the United States, and to indicate where it is likely that they would be detonated. Of particular importance to the urban population of the United States -- which constitutes 70 percent of the total population concentrated on 1 percent of the land area -- are the number and yields of the weapons which might be deliberately targeted to maximize population kill, and the criteria adopted by the attacker for determining how these weapons should be allocated to and within areas of population concentration.

It is argued that a targeting criteria which might be adopted by a potential enemy in assigning a portion of his nuclear delivery force for the purpose of maximizing population fatalities would be to aim weapons in such a way as to include the maximum number of persons within a blast level of at least 5 pounds per square inch (psi) overpressure. It is hypothesized that the total cost of delivering a nuclear weapon over inter-continental distances varies approximately as the $2/3$ power of its yield. Since the area included within the 5 psi level for an airburst or surfaceburst also varies as the $2/3$ power of the yield, the total area included within the 5 psi level for a given total cost for delivered weapons does not depend on the yield of the individual weapons delivered.

The area over which a single weapon exerts a blast level of at least 5 psi is taken as the "lethal" area of the weapon.¹

It is assumed that the level of attack which might be delivered against population targets in the United States would lie between that characterized by 100 1-MT weapons and 1000 1-MT weapons. The lethal areas associated with these two attack levels are:

	<u>Surfacebursts</u>	<u>Airbursts</u>
100 1-MT weapons	2,380 sq. mi.	5,800 sq. mi.
1000 1-MT weapons	23,800 sq. mi.	58,000 sq. mi.

The total urbanized area of the United States covers approximately 25,000 square miles, or approximately the lethal area associated with the airburst of 430 1-MT weapons.

The lethal area associated with an airburst of a given yield is over twice that of a surfaceburst of the same yield. For attacks against urban population, it is an unsolved problem as to whether or not a larger number of fatalities would be incurred by airbursts, with more fatalities from the initial effects of blast, heat, and initial nuclear radiation, or from surfacebursts with a smaller number of fatalities from the immediate effects, but with an uncertain number of casualties

The "lethal area" associated with a nuclear weapon burst is defined as the circular area, centered on the ground zero of the burst, of such radius that the total number of persons in a uniformly dense population which are killed from the blast, heat, and initial nuclear radiation of the burst is equal to the number of persons within the circle. If $P(r)$ is the probability that a person will be killed by the immediate weapon effects as a function of distance r from ground zero, then

$$\text{Lethal area} = \int_0^{\infty} 2\pi r P(r) dr .$$

It is a consequence of the definition that the total number of persons within the lethal area who are not killed just equals the total number outside who are killed.

due to fallout. Accordingly, the possibility of both airbursts and surfacebursts must be taken into account when considering shelter requirements in urban centers subject to direct attack.

Given an attack on the population of the United States, the maximum number of persons would be included within the lethal area of the weapons employed if the lethal area could be allocated to those places in the United States for which the population density is equal to or greater than some minimum population density D_{min} , and to no area for which population density is less than D_{min} . D_{min} can be determined from the total lethal area of the attack, and from a graph (Figure 9) which shows the area of the United States for which the population density is equal to or greater than any given density. The portion of any given urbanized area targeted to the 5 psi level may then be taken as the area within the local population density contour on which the population density is D_{min} . The number of weapons assigned to this area is then chosen so that their combined lethal areas are approximately those of the area within the population density contour determined by D_{min} .

For a given population concentration, there may be no reason to presume that weapons would be aimed at particular points within the area to be targeted (e.g., at specific military or industrial targets). In that case, the probability of survival in a shelter which protects to the X psi level and which is located at random within the targeted area is approximately the ratio of the area covered by X psi from any given weapons burst to the area covered by 5 psi from the same weapon burst. Under the targeting doctrine assumed, this probability is independent of weapon yield, or whether or not the weapon is airburst or surfaceburst. Under the assumptions of this targeting model, a 30 psi shelter will reduce the probability of being killed in a targeted area to about 10 percent.

For shelters subjected to blast levels greater than 30 psi (out one and a half times the radius of the fireball), it is no longer true that protection against blast and high levels of residual radiation (fallout) automatically guarantees protection against initial nuclear radiation.

Fallout deposition patterns are highly unpredictable. The fallout level at any point depends on the total, surfaceburst, fission megatonnage of all attacks against all targets which contribute to the fallout at that point. The highest levels of residual radiation of concern to urban populations are likely to be experienced in and immediately downwind of large urbanized areas subject to direct attack with multiple, high-yield surfacebursts. Based on one of several fallout models currently in use, fallout contamination levels in the range of 5,000-10,000 roentgens/hour at 1 hour, corresponding to maximum biological dose levels of 15,000 to 30,000 roentgens, might reasonably be anticipated in portions of an area attacked with surfaceburst 10-MT weapons, each deriving 50 percent of their yield from fission.

Data are presented to enable, for any given level of attack directed against populations, a rough allocation of weapons among each of the 213 principal urbanized areas in the United States. The model and data indicate that the Washington (D.C. - Va. - Md.) urbanized area, with 1.8 million persons and covering 100 square miles, would be allocated 3 1-MT weapons in an attack against the population of the United States consisting of 100 1-MT weapons airburst at optimum altitude. The model and data indicate this area would receive 12 1-MT weapons for an attack against the United States consisting of 1000 1-MT surfacebursts. In each case the entire District of Columbia, consisting of 62 square miles at an average density of 12,400 persons/square mile, would be subjected to blast levels of at least 5 psi. For an attack against the U.S. population with 300 1-MT airbursts, or 1000

1-MT surfacebursts, the model indicates that the entire Washington urbanized area, including Rockville, Maryland, could anticipate blast levels of at least 5 psi.

PART I - TARGETING ASSUMPTIONS FOR ATTACKS AGAINST POPULATIONS

A. THE PROBLEM

To design a shelter which offers its prospective occupants a reasonable prospect of survival against fallout in the event of thermonuclear war, it is necessary to make a quantitative estimate of the likely level of all weapon effects - blast, thermal, initial radiation, and fallout -- to which the shelter location would be subjected in a nuclear attack. The reason is simple enough: both the shelter and its occupants must withstand those weapon effects which precede the fallout. The problem is to anticipate for any proposed shelter location, both the right magnitude of effects, and the right combination of effects. More precisely, the basis for shelter design and operation must be a prudent and practical assessment of the probability that the proposed shelter will be subjected to various combinations and levels of weapon effects.

It is far from obvious that it is possible to develop useful guidance of this type for every -- or even for any -- location in the United States. There are many strategies and weapons available to the enemy. Our knowledge of them is incomplete, the problems change with time and with technological developments, and much that happens in war is not in accord with anybody's plan. Any place could be in the mile-across, 900-foot-deep hole created by the surfaceburst of a 30-MT warhead, in which case no shelter would be of any avail. And, any place could be largely untouched, even by fallout, in which case no shelter would be needed.

Neither of these latter assumptions would be a useful basis for civil defense planning. This follows from straightforward but not obvious computations on the areas of the fallout, blast, and thermal effects of nuclear weapons, the numbers of cities, towns, and military targets in the United States, and the plausible number of deliverable weapons possessed by any potential enemy. It has been recognized for some time that even remote, rural areas must concern themselves with the possibility of dangerous levels of fallout, and that some cities could be subjected to direct attack, either because they contain or are near to priority military targets, or simply because they are centers of population and industry. Two authoritative statements of targeting doctrine which offer an informed appraisal of the ultimate threat to civil populations have been given by Secretary McNamara and Marshal Sokolovskii:

Secretary McNamara testified before the Senate Armed Services Committee:¹

"The major mission of the strategic retaliatory forces is to deter war by their capability to destroy the enemy's war making potential, including not only his nuclear strike force and military installations, but also his urban society, if necessary."

Marshal Sokolovskii states in his book Soviet Military Strategy:²

"What will be the characteristic features of a war of the future from the point of view of its military-strategic goals and the means of waging it?"

¹Hearings on the Department of Defense Appropriations for FY 1964, U.S. House of Representatives, Part I, Page 110 (Secretary McNamara's statement given on February 7, 1963).

²Military Strategy, edited by V. D. Sokolovskii (Voennaia Strategia, V. D. Sokolovskii, Voennoe Izdatel'stvo Ministerstva Oborony, SSR, Moskva, 1962), translated by Foreign Technology Division, Wright-Patterson Air Force Base (quote from Chapter IV).

"On the basis of the above considered political and military goals of the two camps, it may be assumed that the belligerents will use the most decisive means of waging war with, above all, the mass use of nuclear weapons for the purpose of achieving the annihilation or capitulation of the enemy in the shortest possible time.

"The question arises of what, under these conditions, constitutes the main military-strategic goal of the war: the defeat of the enemy's armed forces as was the case in the past, or the annihilation and destruction of objectives in the enemy zone of the Interior and the disorganization of the latter?

"The theory of Soviet military strategy gives the following answer to this question: both of these goals should be achieved simultaneously. The annihilation of the enemy's armed forces, the destruction of objectives in the zone of the Interior, the disorganization of the zone of the Interior will be a single continuous process of the war. Two main factors are at the root of this solution of the problem: first, the need to decisively defeat the aggressor in the shortest possible time, for which it will be necessary to deprive him simultaneously of his military, political, and economic capabilities of waging war; second, the real possibility of achieving these goals simultaneously with the aid of existing means of armed combat."

Assuming that some fraction of the nuclear striking force of a possible enemy might be employed for the unhappy purpose of killing people in the most efficient manner, what assumptions should be made as to just how it would be used? In particular, what criteria should the civil defense planner use as a guide for determining which cities could reasonably be candidates for direct attack? How far into the suburbs of such cities would it be prudent for the shelter designer to concern himself with blast and heat in addition to fallout, and with what levels of blast, heat, and fallout? Given crude guidance on how many bombs of what sizes might be expected to fall where, it then becomes possible to utilize the detailed and important technical information on the fallout, radiation, and blast effects of individual weapons given in such publications as The Effects of Nuclear Weapons for determining shelter requirements, and evaluating shelter proposals. Without such guidance, the 70 percent

of the U.S. population which presently lives in urban areas has no basis for assessing the merits of alternative protective measures.

B. TARGETING FOR MAXIMUM POPULATION KILL

Determination of the burst locations of an attack designed to maximize population fatalities depends on a number of conditions and assumptions:

The number and yields of nuclear weapons allocated to the destruction of urban targets,

The definition of a fatality, or more correctly the combination of weapon effects assumed to give rise to fatalities over some defined period of time,

The active and passive measures which have been taken to counter the effects of a population attack,

The distribution of population over the targeted area.

It is assumed here that population preparedness is the same as currently exists in the United States, and that active defense measures are not of such a character as to influence the assumptions for passive defense planning. It is further assumed that the actual assignment of weapons is done in a way (described later) which maximizes blast fatalities. This is done without attempting to answer the question of whether or not more persons might in fact be killed during the first day or two by fire (as was the case in Hiroshima and Nagasaki),¹ or within 60 days by radiation, or within the first year by the combined effects of blast, fire, fallout, starvation, disease, exposure, and general chaos. The reason for the assumption is partly that the effects of fallout, fire, and general chaos are both uncertain and difficult to assess, and strongly dependent upon

¹The Effects of Nuclear Weapons, paragraph 11.13-11.20, prepared by the United States Department of Defense, published by the United States Atomic Energy Commission, April 1962, Samuel Glasstone, editor, U.S. Government Printing Office (weapon effects-yield-distance relations, from Nuclear Bomb Effects Computer accompanying publications).

wind and weather. Also, blast is more dependable and decisive against industry and military targets in populated areas than are the other effects of airbursts or surfacebursts.

The question then arises as to what likelihood of a blast fatality should be assigned to a given level of blast overpressure. Here again simplifying assumptions are made which may be better justified as an assumption for optimal targeting than as a method of damage assessment. It is assumed that everyone subjected to an overpressure level of 5 psi (or greater) is killed, and that everyone subjected to less than 5 psi survives.

This assumption may be questioned on two counts: (1) the selection of a model with a single overpressure criterion for determining a fatality, and (2) the choice of 5 psi as the dividing line. Each of these assumptions is examined briefly.

The 1949 edition of The Effects of Atomic Weapons¹ gave a curve showing the percentage of survivors in Hiroshima as a function of radial distance from ground zero. This curve is reproduced as Figure 1, and redrawn in Figure 2 to show the same phenomenon as a function of peak blast overpressure. It is seen from Figure 2 that in this particular unwarned population, the airburst of a 14-KT bomb² caused casualties to begin at an overpressure level of 3 psi, that at 5 psi there were 30 percent fatalities, and that even at 16 psi, 15 percent evidently survived.

¹The Effects of Atomic Weapons, prepared for and in cooperation with the U.S. Department of Defense and the U.S. Atomic Energy Commission under the direction of the Los Alamos Scientific Laboratory. Revised September 1950, Samuel Glasstone, Executive Editor, U.S. Government Printing Office.

²RM 4193 PR The Yield of the Hiroshima Bomb as Derived from Pressure Records, H. L. Brode, September 1964.

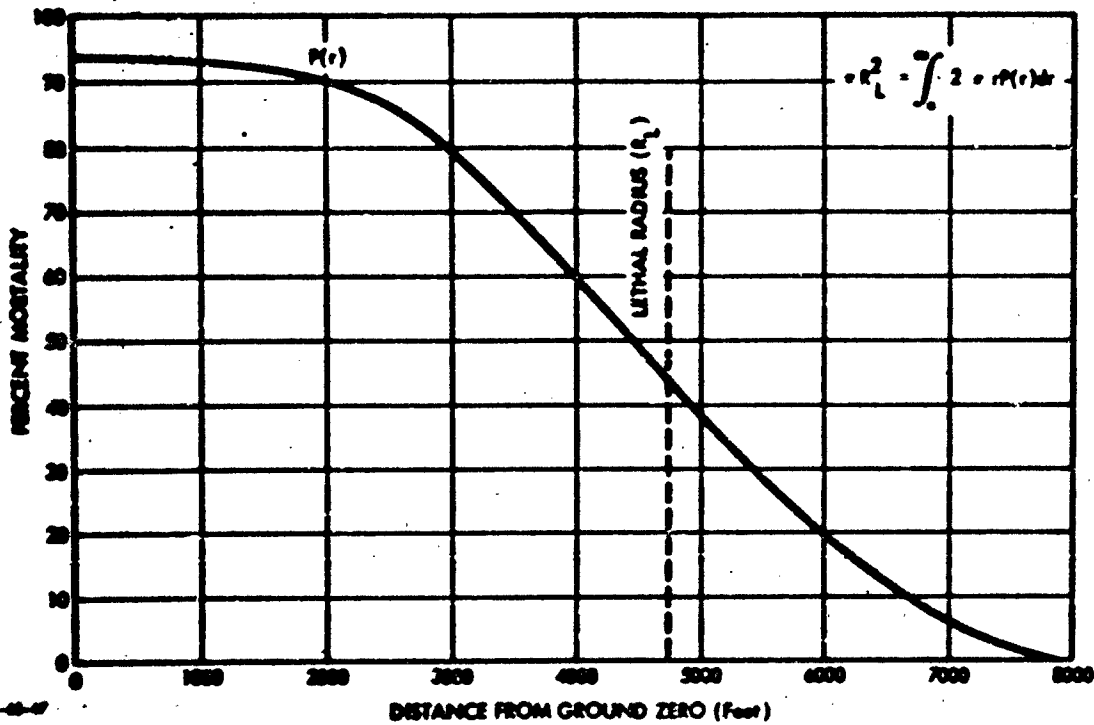


FIGURE 1. Percent Mortality as a Function of Distance from Ground Zero for the Atomic Bombings of Hiroshima and Nagasaki

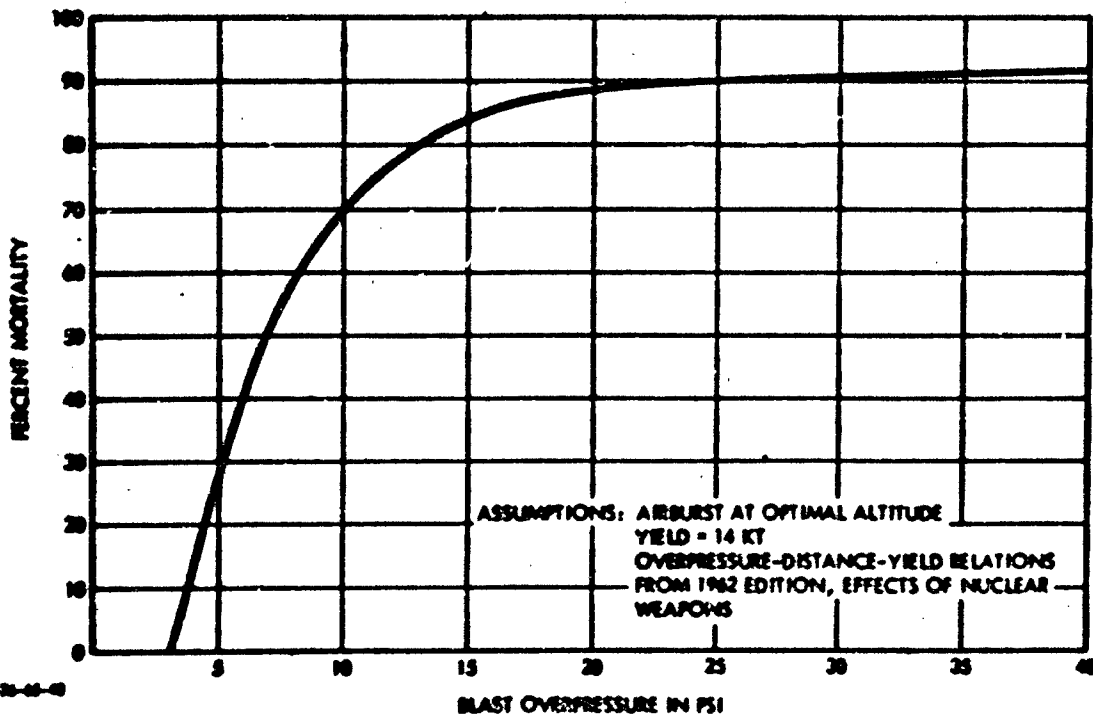


FIGURE 2. Percent Mortality as a Function of Peak Overpressure for the Atomic Bombings of Hiroshima and Nagasaki

the same 48 states will have increased in population to about 210 million persons (an increase of about 32 million persons, or almost 18 percent). Whereas in 1960 almost 70 percent of the population lived in urbanized areas,¹ by 1970 it is estimated that this figure will increase to about 80 percent.

In 1960, the urban population was concentrated in slightly more than 1 percent of the land area of the country (Table 4). The population of urbanized areas, something more than one-half of the total, occupied less than 1 percent of the total land area. Among urban places, the number of inhabitants per square mile decreased as size of place decreased. For places of 1,000,000 inhabitants or more, the average density was 13,865 persons per square mile; for places between 100,000 and 1,000,000, average densities ranged between 4,000 and 6,000 per square mile, and the average density for places of 2,500 to 5,000 was 1,446. In urban-fringe areas outside urban places, the average density was 1,781 per square mile, and in rural territory the density was 15. The average population density for the 48 conterminous states was about 60 persons/square mile.

¹From 1960 Census, Vol. I, op. cit.:

"Urban and rural residence.--According to the definition adopted for use in the 1960 Census, the urban population comprises all persons living in (a) places of 2,500 inhabitants or more incorporated as cities, boroughs, villages, and towns (except towns in New England, New York, and Wisconsin); (b) the densely settled urban fringe, whether incorporated or unincorporated, of urbanized areas; (c) towns in New England and townships in New Jersey and Pennsylvania which contain no incorporated municipalities as subdivisions and have either 25,000 inhabitants or more or a population of 2,500 to 25,000 and a density of 1,500 persons or more per square mile; (d) counties in States other than the New England States, New Jersey, and Pennsylvania that have no incorporated municipalities within their boundaries and have a density of 1,500 persons per square mile; and (e) unincorporated places of 2,500 inhabitants or more. In other words, the urban population comprises all persons living in urbanized areas and in places of 2,500 inhabitants or more outside urbanized areas. The population not classified as urban constitutes the rural population."

**Table 4. POPULATION AND DENSITY
IN GROUPS OF PLACES CLASSIFIED
ACCORDING TO SIZE: 1960**

Area	Population	Land area in square miles	Population per square mile of land area
United States	179,323,179	3,548,974	51
1,000,000 or more	17,004,999	1,261	13,085
500,000 to 1,000,000	11,110,991	1,000	9,009
250,000 to 500,000	10,705,001	2,401	4,460
100,000 to 250,000	11,652,426	2,728	4,271
50,000 to 100,000	13,826,902	3,539	3,910
25,000 to 50,000	14,000,917	5,719	2,451
10,000 to 25,000	17,002,306	6,939	2,532
5,000 to 10,000	9,779,714	5,005	1,954
2,500 to 5,000	7,000,020	5,242	1,440
Other urban territory	10,540,851	5,917	1,781
Rural territory	84,064,425	3,508,736	19
Inside urbanized areas	95,040,407	25,544	3,752
1,000,000 or more	17,004,999	1,261	13,085
500,000 to 1,000,000	11,110,991	1,000	9,009
250,000 to 500,000	10,705,001	2,431	4,404
100,000 to 250,000	11,652,426	2,728	4,271
50,000 to 100,000	13,826,902	3,539	3,910
25,000 to 50,000	8,016,421	2,594	2,396
10,000 to 25,000	8,120,030	2,873	2,900
5,000 to 10,000	2,067,009	1,400	1,573
2,500 to 5,000	1,230,219	866	1,461
Other urban territory	10,540,851	5,917	1,781
Outside urbanized areas	83,674,600	3,523,432	24
25,000 to 50,000	6,935,101	2,725	2,545
10,000 to 25,000	9,227,640	4,266	2,272
5,000 to 10,000	6,917,615	3,517	1,967
2,500 to 5,000	6,329,809	4,306	1,443
Rural territory	84,064,425	3,538,736	19

The distribution of the 1960 U.S. population is shown in Figure 11. A tabulation of U.S. urbanized areas, ranked according to population, is shown in Table 5. Detailed statistics on the land areas, population, and population densities of the central city and urban fringes of the 213 urbanized areas shown in Table 5 are presented in Appendix A. A summary of these statistics is presented in the graphs of Figures 9 and 12.

The U.S. population data summarized above are not very satisfactory inputs to the targeting model described in this paper. One is really interested in the population densities which will pertain in 1970, rather than those which existed in 1960. Further, the definition of urbanized areas, and the scale on which densities were computed, were not devised for the purpose for which they have been used here. A treatment of U.S. census statistics more directly oriented to the needs of civil defense is given in OCD-OEP National Location Code, but as yet without the presentation of land areas and population densities in the central city and the urban fringe.

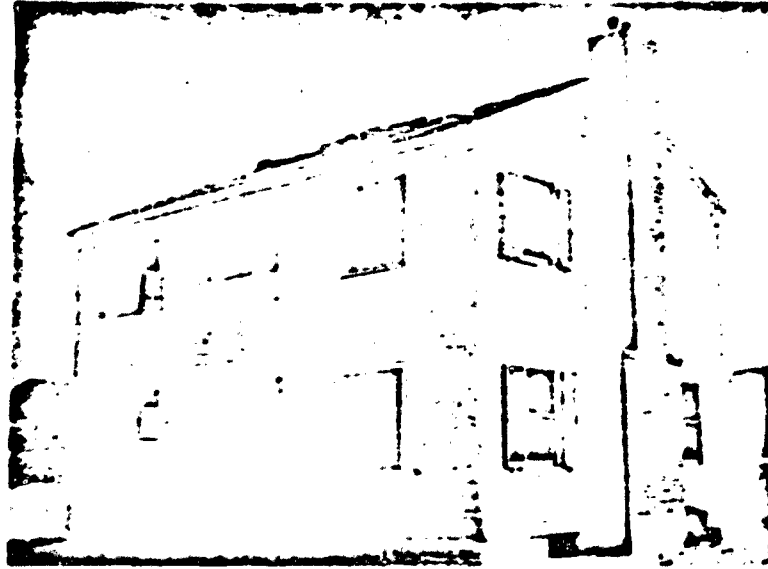


FIGURE 3. Wood-Frame House Exposed to 1.7 psi Overpressure and About 9 cal/cm^2 Thermal Energy (7,500 feet from 16-KT Burst on 300-ft Tower)

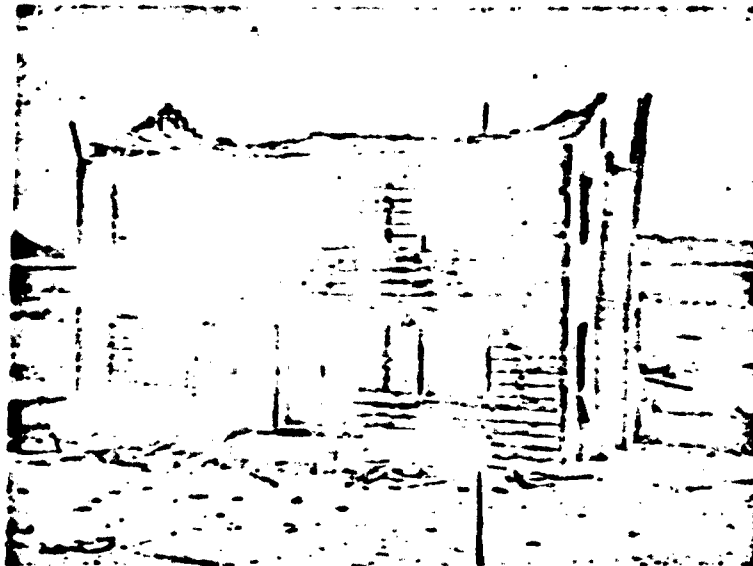


FIGURE 4. Strengthened Wood-Frame House Exposed to 4 psi Overpressure and About 25 cal/cm^2 Thermal Energy (5,500 feet from 29-KT Burst on a 500-ft Tower)



FIGURE 5. Unreinforced Brick House Exposed to 5 psi Overpressure (4,700 feet from 29-KT Burst on a 500-ft Tower)

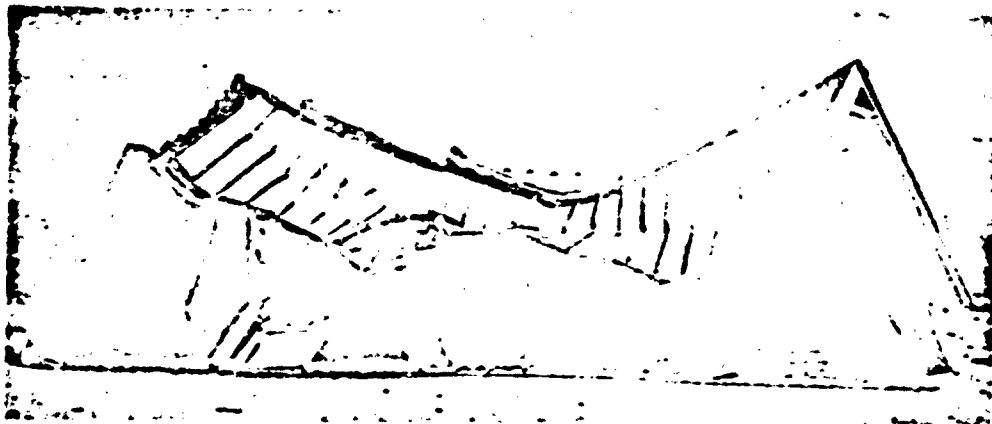


FIGURE 6. Steel-Framing, Steel Panel Building Exposed to 3.1 psi Overpressure

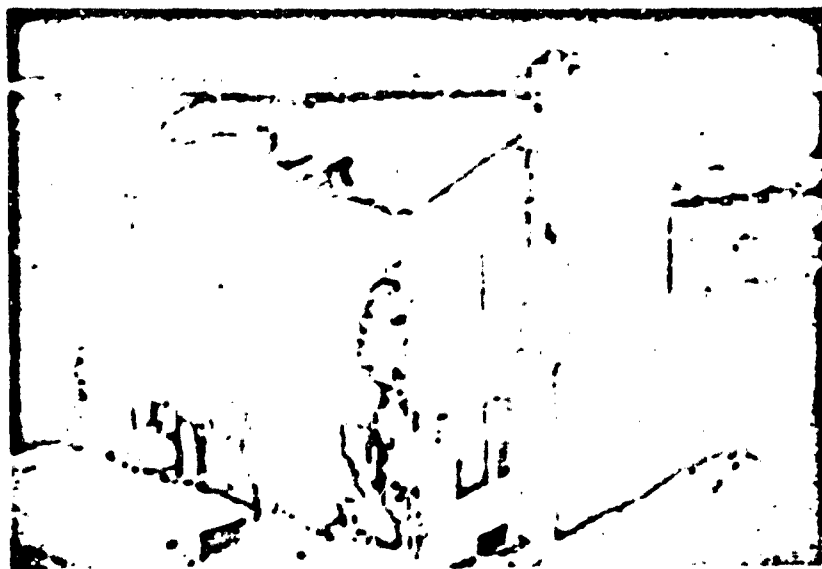


FIGURE 7. Thermal Effects on the Wood-Frame House Immediately After Burst, but Before Arrival of Blast Wave. Thermal Flux was 25 cal/cm^2 . House Destroyed by Blast Wave Which Followed. (3,500 feet from 16-KT Burst on a 300-ft Tower)

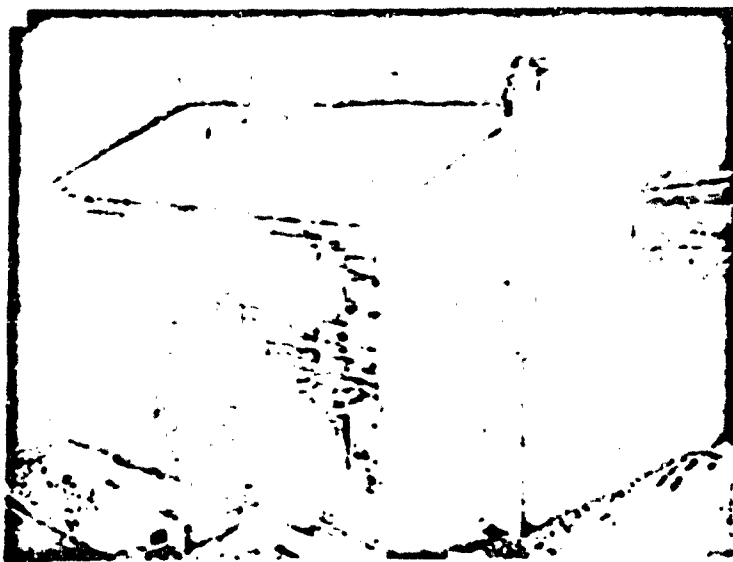


FIGURE 8. Thermal Effects on Wood-Frame House of Figure 7, Two Seconds Later

Table 1. LETHAL RADII AND AREAS FOR THE AIRBURSTS AND SURFACEBURSTS OF A 1-, 8- AND 64-MT WEAPON

Weapon Yield (MT)	Lethal Radius (in statute miles)	Lethal Area (in statute sq. mi.)
	<u>Surfacebursts</u>	
1	2.75	23.8
8	9.00	96.0
64	17.00	362.0
	<u>Airbursts</u>	
1	4.20	96.0
8	6.00	226.0
64	17.00	966.0

Assumption Lethal radius corresponds to an overpressure of 5 psi.

$$R_2 = R_1 \sqrt[3]{Y_2/Y_1}$$

$$A_2 = A_1 \sqrt[3]{Y_2/Y_1}$$

where R_1 and A_1 are the lethal radius and area of a 1-MT burst.

No one can know what fraction of an enemy's total deliverable megatonnage would be allotted to military and to urban targets. It could depend on how the war started, and the extent to which he believed the civil population of his own country had been deliberately attacked. One can, however, make some high and low estimates of the total weight of attack intended for the destruction of U.S. cities, and hypothesize some rough relations governing the total cost -- and presumably therefore the total military effort -- of delivering weapons of different yield to obtain some approximate tradeoffs between the number and yield of weapons which might be used

against us if the U.S. were subjected to direct population attacks. The assumption made here, and one which cannot be justified except by general arguments relating to the economies of scale, is that the cost of a strategic weapon delivered over intercontinental distances varies approximately as the 2/3 power of the yield.

Suppose now one has three weights of attack target against a set of (urban) targets corresponding respectively, to the delivery of

- 100 1-MT bombs,
- 300 1-MT bombs,
- 1000 1-MT bombs.

How would these attack levels translate into numbers of weapons and total delivered megatonnage if the same effort had been put into 8-MT bombs or 64-MT bombs, if the total cost is held constant?

Let $C(Y)$ = cost per strategic weapon delivered.

Then $C(Y) = C_1 Y^{2/3}$, where C_1 is the cost of delivery of a 1-MT weapon, and Y is the weapon yield in MT.

Let B = Strategic offensive budget for given level of population attack.

$$\text{Then total number of weapons delivered} = \frac{B}{C(Y)} = \frac{B}{C_1} \frac{1}{Y^{2/3}}$$

$$\text{total yield delivered} = Y \times \frac{B}{C(Y)} = \left(\frac{B}{C_1}\right) Y^{1/3}$$

Table 2. SPECIFICATION OF NUMBER OF WEAPONS AND TOTAL YIELD FOR THREE LEVELS OF ATTACK

ATTACK LEVEL 1			
Attack No. 1	Attack No. 2	Attack No. 3	
100 1-MT weapons 100 MT total yield	25 8-MT weapons 200 MT total yield	6 64-MT weapons 384 MT total yield	
ATTACK LEVEL 2			
Attack No. 4	Attack No. 5	Attack No. 6	
200 1-MT weapons 200 MT total yield	75 8-MT weapons 600 MT total yield	18 64-MT weapons 1216 MT total yield	
ATTACK LEVEL 3			
Attack No. 7	Attack No. 8	Attack No. 9	
1000 1-MT weapons 1000 MT total yield	250 8-MT weapons 2000 MT total yield	63 64-MT weapons 4032 MT total yield	
TOTAL LETHAL AREA AT 5 PSI LEVEL			
	Attack Level 1	Attack Level 2	Attack Level 3
Terfacoburst	2,500 sq.mi.	7,140 sq.mi.	23,000 sq.mi.
Optimum Airburst	5,000 sq.mi.	17,400 sq.mi.	56,000 sq.mi.

The equivalent numbers and yields of weapons for the three attack levels indicated above would then be shown in Table 2.

There is an interesting consequence of the assumptions concerning the cost of deliverable weapons as a function of individual weapon yield, and the manner in which the lethal area of a weapon increases with yield. Namely, for a given expenditure, the combined lethal area of the weapons does not depend on individual weapon yield. That is, the lethal area is the same for each attack level shown in Table 2.

It remains to determine how a given level of attack should be targeted -- that is to say, the location of the ground zeros -- for attacks against people designed to maximize blast fatalities. The basic criteria, discussed above, is that the maximum number of persons be included within the 5 psi over-pressure level.

The key element is recognition that the essential factor governing the allocation of weapons is the density of population. It has been shown that for a given level of attack with airbursts or surfacebursts, a fixed amount of lethal area has to be distributed over the United States. Suppose now one has a curve, such as shown in Figure 9, showing the area of the United States for which the population density exceeds any given density D . It may be noted that the maximum number of persons could be covered with a given total lethal area if this area could be distributed in such a way as to cover all those areas in the United States for which the population density is greater than or equal to some minimum density D_{\min} , and no areas at all for which the density of population is less than D_{\min} . Further, the value of this D_{\min} would then be determined from such a curve as that shown in Figure 9, together with the total lethal area available. If then one wished to know how much of the total lethal area should be allocated to any given metropolitan or urbanized area, it would suffice to determine the population density contour around a given city within which the population density is always greater than or equal to D_{\min} , and to compute the area within this contour. The area so determined would be the optimum lethal area to allocate to any given city. This lethal area could then be converted back, from a knowledge of the lethal area of individual weapons, to provide a rule for calculating the optimum number of weapons to allocate to that particular city or urbanized area.

To be a strictly valid optimization procedure, this rule would require that the lethal area of a weapon be able to take

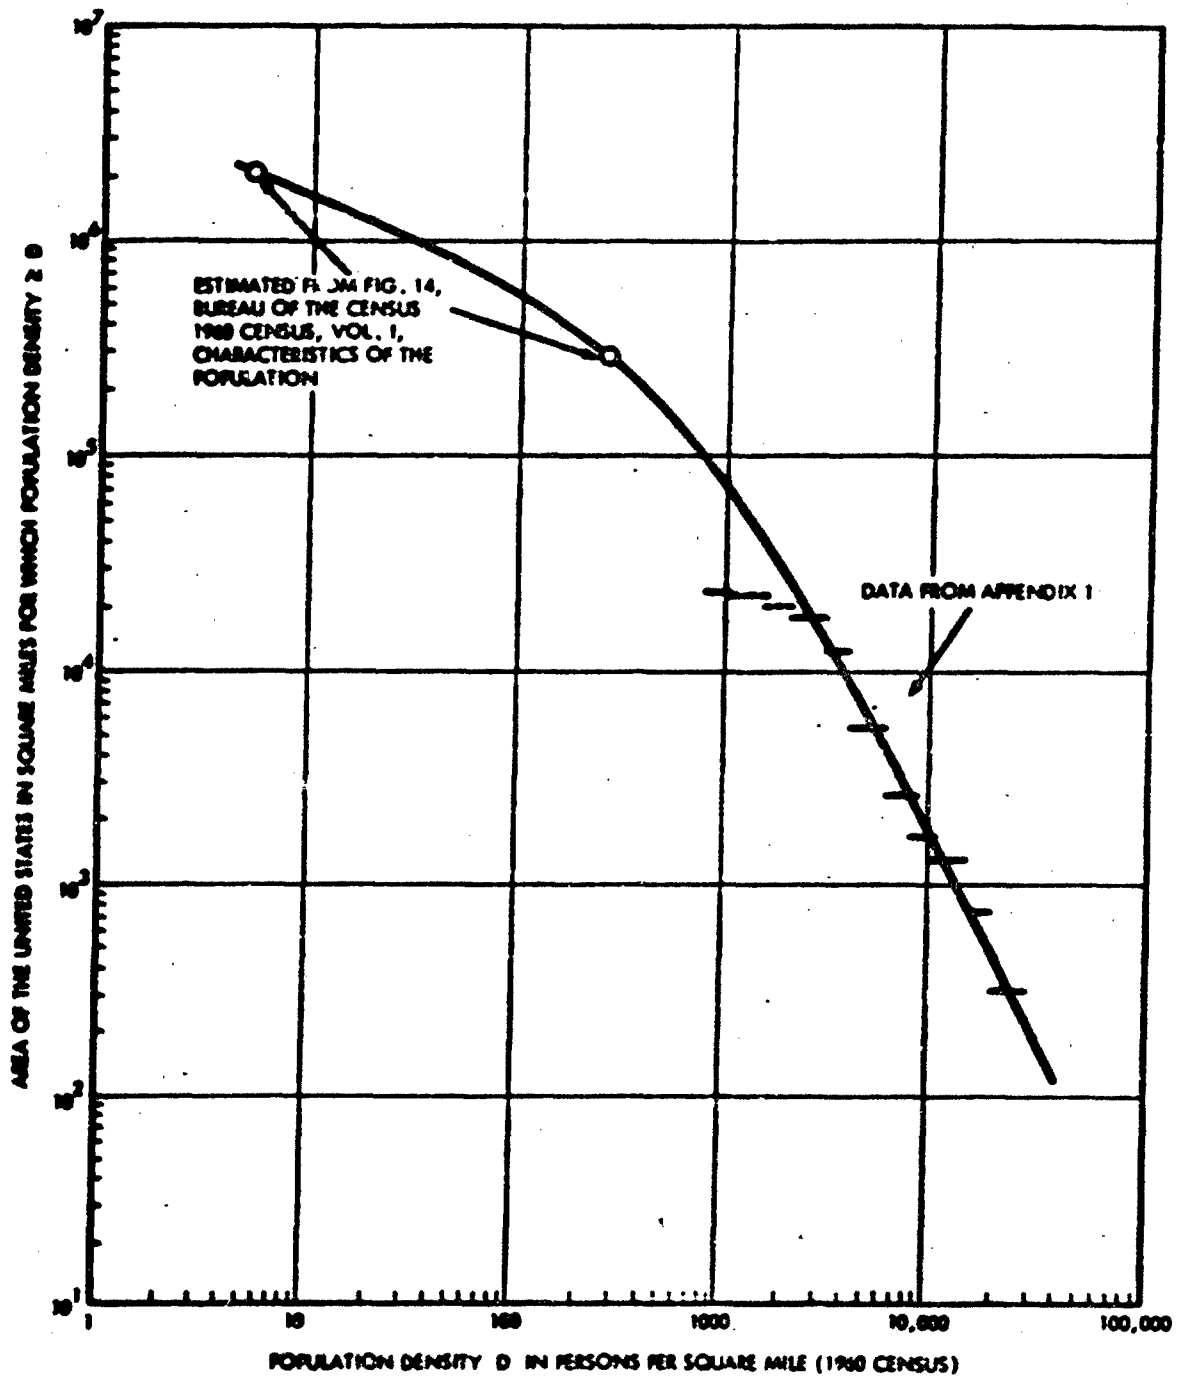


FIGURE 9. Area of the United States for Which the Population Density $\geq D$ Persons/mi² (1960 Census)

3-20-66-28

any shape to fit, without overlaps or gaps, within any population density contour for which the population density is equal to or greater than D_{\min} . It would also be necessary to utilize only a fraction of a weapon in the event the area of a concentration of population for which the D is equal to or greater than D_{\min} were less than a lethal area. For the concept of lethal area to be applicable, however, the population density should not vary significantly over linear distances comparable to the lethal radius. That this is the case for the weapon yields considered here (1, 8, 64 MT) can only be verified by a detailed examination of population densities in U.S. urban areas. It may also be noted, however, that since the cost per unit of delivered lethal (blast) area is assumed not to vary with the yield of the individual weapons, it is not unreasonable to assume that for a given level of attack against population, the yield of weapons for attack of a particular target would be selected to cover a given area as uniformly as possible. If one places weapons inside a contour where D is equal to or greater than D_{\min} in such a way that the circular lethal areas of individual weapons are just tangent to each other, then one may argue that the gaps between the circular coverage are not too serious inasmuch as the locations not covered by 5 psi from any single weapon will be covered by an overpressure somewhat less than 5 psi from several weapons. But, whatever the approximations involved, the important and essential result is that a simple and direct criterion exists of deducing an optimum, or near optimum, allocation of weapons to any particular target among all the competing targets in the country from (1) one curve showing the area of the U.S. for which the population density exceeds any given amount, (2) a map of the particular target of interest on which contours of constant population density are indicated, and (3) a second curve showing the area within the target area for which the population density exceeds any given amount.

It should be emphasized, of course, that some cities, by virtue of their collocation with important military targets or important governmental control or industrial centers have a strategic targeting importance for reasons other than population per se. Such cities might be attacked much more -- or less -- heavily than indicated by the model. It is also possible that arguments can be made that the best way to disrupt a country and kill its population is to spread the attack much more widely than indicated by the method proposed here on the grounds that the longer range effects of starvation, disease, and economic chaos would take a larger toll if no urban areas were left physically intact. Further the model tells nothing about whether or not an enemy might decide to seek to avoid population fatalities or maximize them, or how much of his total military effort would be allocated to the task of killing people if that were one of his targeting objectives. But it does provide crude but important quantitative guidance to urban and suburban populations per se as to magnitude of the various weapon effects to which they could reasonably be subjected in the event the enemy targets in the simplest way to assure maximum prompt population kill.

C. ADDITIONAL CONSEQUENCES OF THE TARGETING MODEL

The model, as presented, leads to a number of interesting side conclusions. First, the selection of ground zeros within the minimum density contour is not directly important. All that matters is that the weapons be laid down in such a way that the entire area is covered with a minimum of gaps or overlaps. There may, of course, be local reasons why particular points within an area would be a more profitable aim point. For example, some might coincide with a higher concentration of industry, or an important governmental seat, or a target of direct military interest. Unless one assumes that a given metropolitan area would be attacked with a single weapon whose circular lethal area coincided approximately with the density

contour to be targeted, or unless there are local reasons for assuming the selection of specific aim points, one might assume for the purpose of designing and locating shelters that any point within the contour indicating the density of population to be targeted is as likely to be a ground zero as any other point. Under this assumption the model gives an indication of the potential value of constructing a shelter which will withstand a given overpressure level, provided the enemy targets for maximum population kill on the assumption of an unsheltered population. The value of the potential shelter protection so afforded is, in fact, independent of the yield of the individual weapons employed, or whether or not targeting (for blast kill) is done on the basis of an airburst or surfaceburst. For suppose the lethal radius of a single weapon corresponds to X psi, and that a shelter is built to withstand Z psi. Then if R_{L1} is the lethal radius of a 1-MT weapon, the lethal area of a Y-MT weapon will be $\pi(R_{L1} Y^{1/3})^2$. If R_{Z1} is the distance to which an overpressure of Z psi is experienced from a 1-MT weapon, then $\pi(R_{Z1} Y^{1/3})^2$ will be the area over which this overpressure is experienced from a Y-MT bomb. Thus the protection offered by the shelter capable of withstanding Z psi, and located at random within the targeted area will be given by the ratio

$$\frac{\pi(R_{Z1} Y^{1/3})^2}{\pi(R_{L1} Y^{1/3})^2} = \left(\frac{R_{Z1}}{R_{L1}}\right)^2$$

and this holds for both airbursts or surfacebursts. Assuming, as before, that R_{L1} corresponds to 5 psi, one can then plot potential survival probability in a Z psi shelter provided that targeting is done to achieve maximum population kill against an unsheltered population. Such a curve is shown in Figure 10. The value of achieving shelter protection in the range of 20-30 psi is immediately apparent.

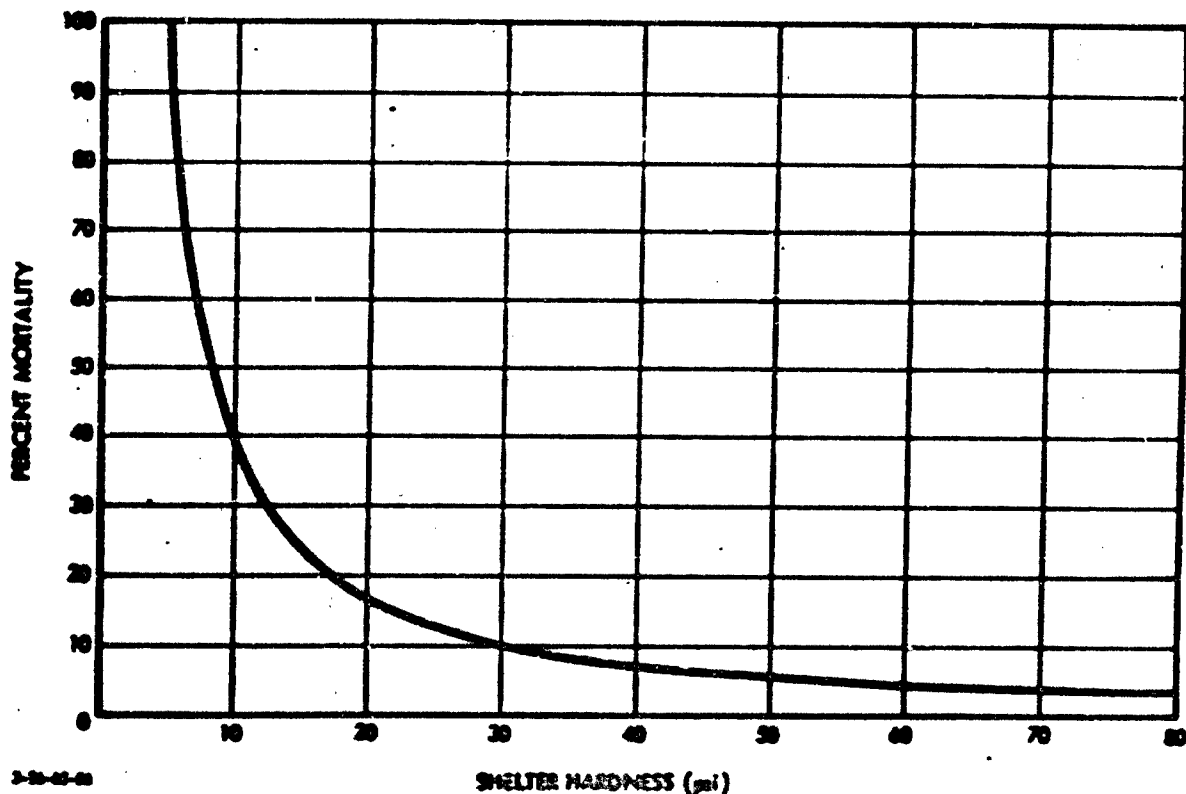


FIGURE 10. Percent Mortality in a Targeted Area, Assuming Targeting Optimized to Cover the Maximum Number of Persons with an Overpressure of 5 psi

Finally, it may be noted that the targeting model herein proposed can still be applied if the population of certain densely settled areas is sheltered to any specified level of blast protection provided the density of population in the sheltered areas is first assumed to be reduced by the same ratio as plotted in Figure 10. This means, for example, that the effect of a 30 psi shelter, from the point of view of an enemy targeteer trying to optimize fatalities in an unsheltered population, is to reduce the density of population in a specific area by a factor of 10. This would suggest that for a given level of attack, some persons who would not be targeted in an unsheltered population would then become logical targets for direct attack. The total national casualties would decrease, however, depending (in a complex way) on how many persons in what areas were sheltered, and to what level of protection.

Table 3. POPULATION OF THE UNITED STATES AND OUTLYING AREAS: 1960 and 1950

	1960	1950	Increase, 1950 to 1960	
			Number	Percent
Total	183,285,009	154,233,234	29,051,775	18.8
United States	179,323,175	151,325,798	27,997,377	18.5
Conterminous United States	178,464,236	150,697,361	27,766,875	18.4
Alaska	226,167	128,643	97,524	75.8
Hawaii	632,772	499,794	132,978	26.6
Commonwealth of Puerto Rico	2,349,544	2,210,703	138,841	6.3
Outlying areas of sovereignty or jurisdiction	237,869	215,188	22,681	10.5
United States population abroad	1,374,421	481,545	892,876	185.4

D. THE POPULATION OF THE UNITED STATES

The utility of the targeting model described -- or that of any other model -- depends in part on the distribution of the population of the United States over the land area of the United States. The principal characteristics of this population distribution, as abstracted from references,¹ are here summarized. The data and conclusions given are all based on the 1960 census. The principal factor to keep in mind when projecting these figures into the future are that the U.S. population is not only growing, but, as described below, is becoming relatively more concentrated.

On April 1, 1960, the population of the 48 conterminous states, with total land area of about 3 million square miles, was 178, 464, 236 (see Table 3). By 1970 it is estimated that

¹U.S. Department of Commerce, Bureau of the Census, 1960 Census, Vol. I, Characteristics of the Population, U.S. Government Printing Office, Washington, D. C., 1961.
OCD-OEP National Location Code, prepared by the Bureau of the Census for the Office of Civil Defense, Department of Defense, and the National Resource Evaluation Center, Office of Emergency Planning, 1962 (in 8 volumes), Unclassified.
 Bureau of the Budget, Executive Office of the President, Standard Metropolitan Statistical Areas, 1964.

the same 48 states will have increased in population to about 210 million persons (an increase of about 32 million persons, or almost 18 percent). Whereas in 1960 almost 70 percent of the population lived in urbanized areas,¹ by 1970 it is estimated that this figure will increase to about 80 percent.

In 1960, the urban population was concentrated in slightly more than 1 percent of the land area of the country (Table 4). The population of urbanized areas, something more than one-half of the total, occupied less than 1 percent of the total land area. Among urban places, the number of inhabitants per square mile decreased as size of place decreased. For places of 1,000,000 inhabitants or more, the average density was 13,865 persons per square mile; for places between 100,000 and 1,000,000, average densities ranged between 4,000 and 6,000 per square mile, and the average density for places of 2,500 to 5,000 was 1,446. In urban-fringe areas outside urban places, the average density was 1,781 per square mile, and in rural territory the density was 15. The average population density for the 48 conterminous states was about 60 persons/square mile.

¹From 1960 Census, Vol. I, op. cit.:

"Urban and rural residence.--According to the definition adopted for use in the 1960 Census, the urban population comprises all persons living in (a) places of 2,500 inhabitants or more incorporated as cities, boroughs, villages, and towns (except towns in New England, New York, and Wisconsin); (b) the densely settled urban fringe, whether incorporated or unincorporated, of urbanized areas; (c) towns in New England and townships in New Jersey and Pennsylvania which contain no incorporated municipalities as subdivisions and have either 25,000 inhabitants or more or a population of 2,500 to 25,000 and a density of 1,500 persons or more per square mile; (d) counties in States other than the New England States, New Jersey, and Pennsylvania that have no incorporated municipalities within their boundaries and have a density of 1,500 persons per square mile; and (e) unincorporated places of 2,500 inhabitants or more. In other words, the urban population comprises all persons living in urbanized areas and in places of 2,500 inhabitants or more outside urbanized areas. The population not classified as urban constitutes the rural population."

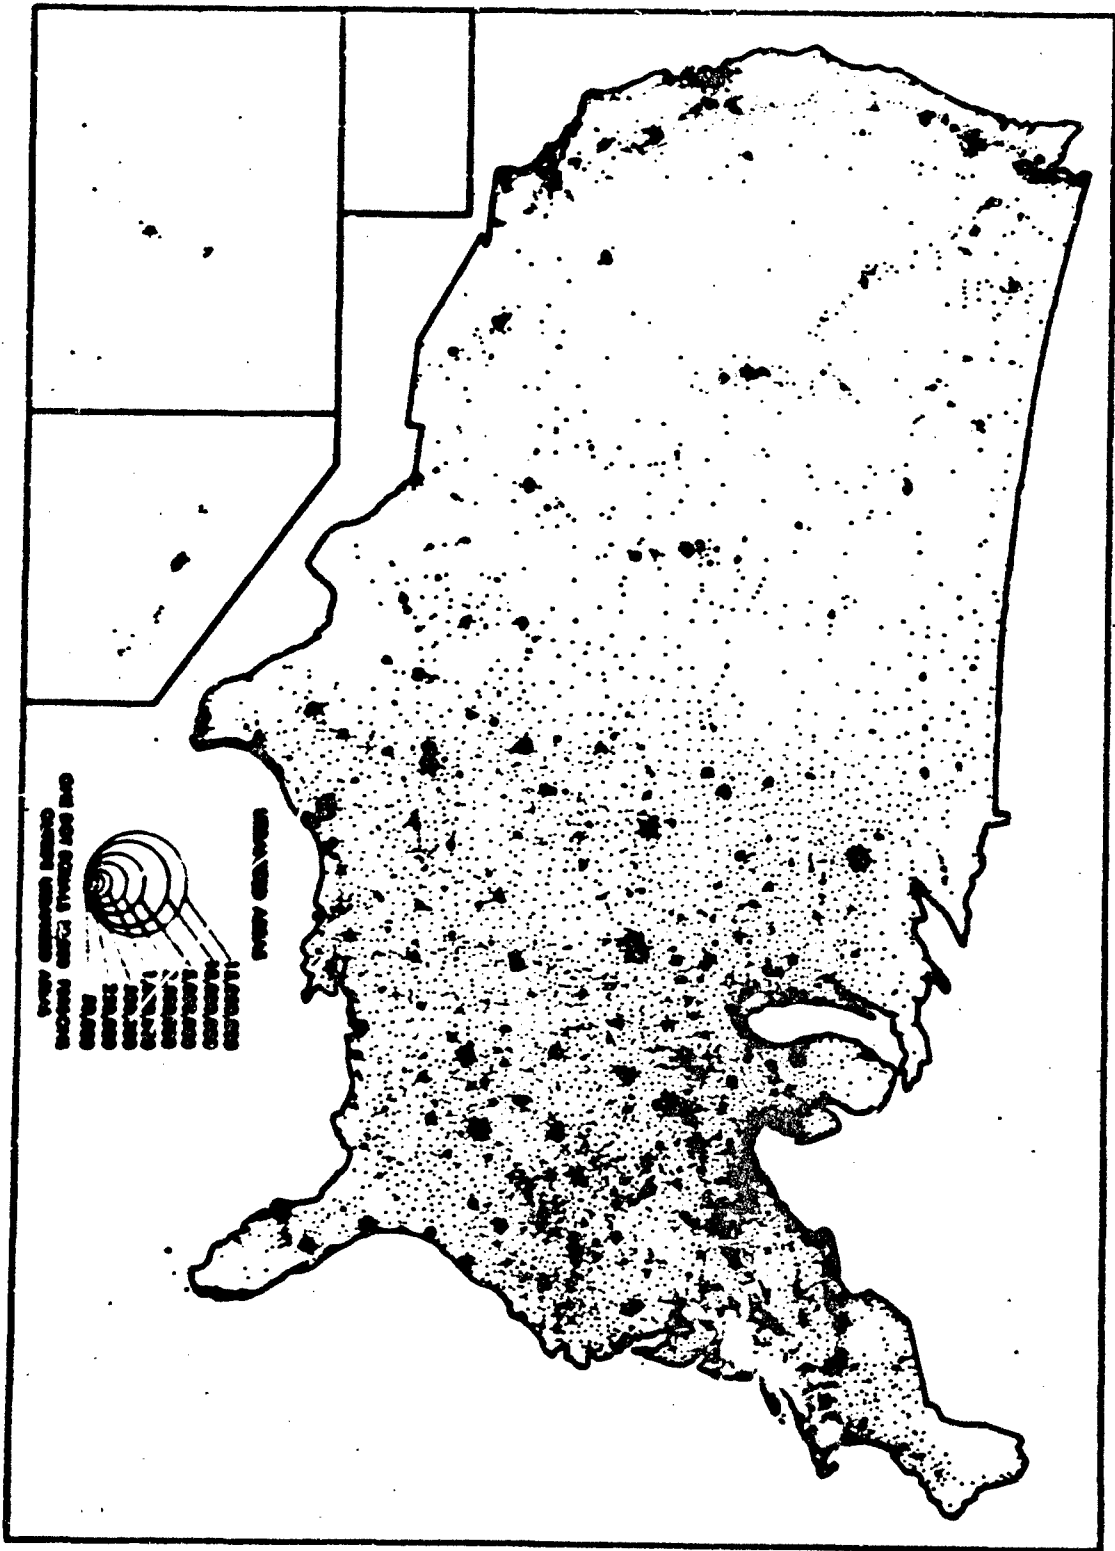


FIGURE 11. Distribution of U.S. Population, 1960

Table 4. POPULATION AND DENSITY GROUPS OF PLACES CLASSIFIED ACCORDING TO SIZE: 1960

Area	Population	Land area in square miles	Population per square mile of land area
United States	179,323,179	3,548,974	51
500,000 or more	17,484,049	1,261	13,865
250,000 to 500,000	11,110,991	1,888	5,888
100,000 to 250,000	10,787,881	2,481	4,344
50,000 to 100,000	11,852,425	2,728	4,377
25,000 to 50,000	13,829,902	3,529	3,918
10,000 to 25,000	14,958,812	6,319	2,381
5,000 to 10,000	17,448,306	6,929	2,522
2,000 to 5,000	9,779,714	5,895	1,659
1,000 to 2,000	7,588,828	5,242	1,448
Non urban territory	18,948,851	8,917	1,781
Total territory	84,854,425	3,588,738	18
Inside urbanized areas	98,848,487	23,544	3,752
500,000 or more	17,484,049	1,261	13,865
250,000 to 500,000	11,110,991	1,888	5,888
100,000 to 250,000	10,787,881	2,481	4,344
50,000 to 100,000	11,852,425	2,728	4,377
25,000 to 50,000	13,829,902	3,529	3,918
10,000 to 25,000	8,815,421	2,594	2,990
5,000 to 10,000	8,238,638	2,873	2,868
2,000 to 5,000	2,882,899	1,488	1,923
1,000 to 2,000	1,298,779	884	1,467
Non urban territory	18,948,851	8,917	1,781
Inside urbanized areas	83,474,888	3,523,428	24
500 to 99,999	6,928,181	2,725	2,548
100,000 to 249,999	9,237,848	4,866	2,272
250 to 499,999	8,817,815	3,517	1,967
500 to 9,999	6,229,889	4,288	1,443
Total territory	84,854,425	3,588,738	18

The distribution of the 1960 U.S. population is shown in Figure 11. A tabulation of U.S. urbanized areas, ranked according to population, is shown in Table 5. Detailed statistics on the land areas, population, and population densities of the central city and urban fringes of the 213 urbanized areas shown in Table 5 are presented in Appendix A. A summary of these statistics is presented in the graphs of Figures 9 and 12.

The U.S. population data summarized above are not very satisfactory inputs to the targeting model described in this paper. One is really interested in the population densities which will pertain in 1970, rather than those which existed in 1960. Further, the definition of urbanized areas, and the scale on which densities were computed, were not devised for the purpose for which they have been used here. A treatment of U.S. census statistics more directly oriented to the needs of civil defense is given in OCD-OEP National Loca-

on Code, but as yet without the presentation of land areas and population densities in the central city and the urban fringe.

Table 5. RANK OF U.S. URBANIZED AREAS ACCORDING TO THE 1960 CENSUS

Rank	Urbanized Area	Population	Rank	Urbanized Area	Population	Rank	Urbanized Area	Population
1	New York-Carthage New Jersey	14,114,927	71	San Rafael, Tex.	281,115	141	Kalamazoo, Mich.	115,659
2	Los Angeles-Long Beach, Calif.	6,488,791	72	Wilkes-Barre, Pa.	233,932	142	Ann Arbor, Mich.	115,262
3	Chicago-Northwestern Indiana	5,999,213	73	Tucson, Ariz.	227,433	143	Waco, Ga.	111,960
4	Philadelphia, Pa.-N.J.	3,535,278	74	Sanport-San Island- Maline, Iowa-Ill.	227,176	144	Lexington, Ky.	111,701
5	Detroit, Mich.	3,537,799	75	Spokane, Wash.	225,920	145	Springfield, Ill.	111,403
6	San Francisco-Oakland, Calif.	2,436,663	76	Worcester, Mass.	225,446	146	Jackson, Miss.	111,315
7	Dallas, Texas	2,413,236	77	South Bend, Ind.-Mich.	219,422	147	Cedar Rapids, Iowa	109,110
8	Washington, D.C.-Md.- Va.	1,800,423	78	Tacoma, Wash.	214,925	148	Pueblo, Colo.	103,326
9	Pittsburgh, Pa.	1,704,400	79	Canton, Ohio	213,574	149	Metairie, La.	102,827
10	Cleveland, Ohio	1,704,991	80	Fresno, Calif.	213,494	151	Wichita, Kans.	102,164
11	St. Louis, Mo.-Ill.	1,667,993	81	Scranton, Pa.	210,676	152	York, Pa.	100,872
12	Baltimore, Md.	1,618,968	82	Charlotte, N.C.	209,351	153	Colorado Springs, Colo.	100,220
13	Minneapolis-St. Paul, Minn.	1,577,143	83	Harrisburg, Pa.	209,521	154	New Britain, Conn.	99,894
14	Wichita, Kan.	1,499,997	84	Sanport-San-Newton, Va.	208,874	155	Waukegan, N.Y.-Ohio	99,951
15	Houston, Texas	1,439,678	85	Shreveport, La.	208,563	156	Sioux City, Iowa-Iowa- S. Dak.	97,926
16	Buffalo, N.Y.	1,404,379	86	Chattanooga, Tenn.-Ga.	204,145	157	Springfield, Mo.	97,224
17	Cincinnati, Ohio-Ky.	993,548	87	Orlando, Fla.	200,945	158	Green Bay, Wis.	97,162
18	Dallas, Texas	932,300	88	Baton Rouge, La.	193,485	159	Johnstown, Pa.	95,474
19	Kansas City, Mo.-Kans.	921,121	89	Albany-Rensselaer, N.Y.	187,779	160	Racine, Wis.	95,062
20	Seattle, Wash.	884,709	90	Austin, Texas	187,187	161	Eugene, Oreg.	95,000
21	Wheat, Ill.	882,705	91	Pomona-Ontario, Calif.	186,547	162	Mustang-Muskogee Highlands, Mich.	95,390
22	New Orleans, La.	845,237	92	Little Rock-North Little Rock, Ark.	186,217	163	Salina, N.C.	92,921
23	San Diego, Calif.	826,175	93	Peoria, Ill.	181,432	164	Leicester, Pa.	91,966
24	Denver, Colo.	803,624	94	Fort Wayne, Ind.	179,371	165	Roanoke, N.H.	91,500
25	Atlanta, Ga.	783,123	95	Erie, Pa.	177,833	166	Billings, Mont.	90,157
26	Provo-Spokane- Pawtucket, N.H.-Mass.	659,842	96	Corpus Christi, Texas	177,381	167	Springfield, Ohio	90,157
27	Portland, Oreg.-Wash.	651,605	97	West Palm Beach, Fla.	172,335	168	Hamilton, Ohio	89,778
28	San Antonio, Texas	641,365	98	Knoxville, Tenn.	172,734	169	Decatur, Ill.	89,514
29	Indianapolis, Ind.	639,343	99	Rockford, Ill.	171,681	170	Las Vegas, Nev.	89,427
30	Columbus, Ohio	616,743	100	Savannah, Ga.	169,887	171	Lake Charles, La.	89,115
31	Louisville, Ky.-Ind.	606,659	101	Charleston, N.Y.	169,510	172	Acworth, Ill.	89,522
32	San Jose, Calif.	602,005	102	Lansing, Mich.	169,315	173	Berham, N.C.	84,642
33	Phoenix, Ariz.	552,643	103	Stamford, Conn.	166,991	174	Odessa, Texas	84,285
34	Memphis, Tenn.	544,505	104	Lawrence- Newportville, Mass.-N.H.	166,125	175	Altamont, Pa.	84,050
35	Birmingham, Ala.	521,330	105	Huntington - Ashland, N.Y.-Ky.-Ohio	165,732	176	Harwich, Conn.	82,970
36	Norfolk-Portsmouth, Va.	507,825	106	Columbia, S.C.	162,621	177	Staubsville- Weirton, Ohio-W. Va.	81,613
37	Fort Worth, Texas	502,682	107	Reading, Pa.	160,297	178	Terre Haute, Ind.	81,415
38	Dayton, Ohio	501,664	108	Charleston, S.C.	160,113	179	St. Joseph, Mo.-Kans.	81,187
39	Rochester, N.Y.	493,442	109	Columbus, Ga.-Ala.	158,382	180	Merced, La.	80,544
40	Akron, Ohio	488,253	110	Binghamton, N.Y.	158,121	181	Champaign-Urbana, Ill.	78,814
41	Albany-Schenectady- Troy, N.Y.	488,447	111	Hingham, Wis.	157,814	182	Macon, Ind.	77,504
42	Sacramento, Calif.	451,929	112	Jackson, Miss.	157,440	183	Tuscaloosa, Ala.	76,815
43	Springfield- Chicago- Naperville, Mass.-Conn.	449,777	113	Duluth-Superior, Minn.- Wisc.	154,763	184	Huntsville, Ala.	74,979
44	Tulsa, Okla.	436,283	114	Evans, Ia. Ind.	143,660	185	Keosauqua, Wis.	72,852
45	Oklahoma City, Okla.	429,188	115	Montgomery, Ala.	142,893	186	Bay City, Mich.	72,763
46	Omaha, Neb.-Iowa	399,081	116	Lorain-Lytle, Ohio	142,882	187	Santa Barbara, Calif.	72,740
47	Portland, Conn.	381,619	117	Bakersfield, Calif.	141,783	188	Fargo-Moorhead, N. Dak. Minn.	72,730
48	San Bernardino- Riverside, Calif.	377,631	118	Moberly, Mo.	141,624	189	Fitchburg-Lewiston, Mass.	72,347
49	Youngstown-Warren, Ohio-Pa.	372,748	119	Stockton, Calif.	141,624	190	Jackson, Mich.	71,612
50	Jacksonville, Fla.	372,569	120	Anchorage, Texas	137,949	191	Roanoke, Nev.	70,109
51	Bridgeport, Conn.	366,654	121	Lincoln, Neb.	136,221	192	Goodson, Ala.	68,944
52	Mobile, Ala.	351,336	122	Lubbock, Texas	129,289	193	Asheville, N.C.	68,592
53	Salt Lake City, Utah	348,661	123	Saginaw, Mich.	129,219	194	Sioux Falls, S. Dak.	68,582
54	Memphis, Tenn.	348,729	124	Winston-Salem, N.C.	128,176	195	High Point, N.C.	68,543
55	Richmond, Va.	333,430	125	Pensacola, Fla.	128,049	196	Louisville-Auburn, Maine	65,253
56	Syracuse, N.Y.	333,286	126	Greenville, S.C.	126,987	197	Midland, Texas	63,274
57	St. Petersburg, Fla.	324,842	127	New Bedford, Mass.	126,657	198	Line, Ohio	62,963
58	Fort Lauderdale- Mollywood, Fla.	319,951	128	Atlantic City, N.J.	124,922	199	Pittsfield, Mass.	62,296
59	Tampa, Fla.	321,790	129	Roanoke, Va.	124,752	200	Lauton, Ohio	61,941
60	Tulsa, Okla.	298,922	130	Fall River, Mass.-N.J.	123,951	201	Hartington-San Benito, Texas	61,658
61	Grand Rapids, Mich.	294,230	131	Augusta, Ga.-S.C.	123,694	202	Fort Smith, Ark.-Ohio	61,649
62	Wichita, Kans.	292,130	132	Greensboro, N.C.	123,334	203	Provo-Brom, Utah	60,795
63	Wilmington, Del.-N.J.	283,667	133	Peoria, Ill.	121,927	204	Billings, Mont.	60,712
64	New Haven, Conn.	278,794	134	Topeka, Kans.	119,522	205	Laredo, Texas	60,678
65	Flint, Mich.	277,766	135	Beaumont, Texas	119,178	206	Burlington, Iowa-Ill.	59,647
66	El Paso, Texas	277,128	136	Lowell, Mass.	118,547	207	Lynchburg, Va.	59,319
67	Mobile, Ala.	268,139	137	Galveston-Texas City, Texas	118,402	208	San Angelo, Texas	58,815
68	Albany-Schenectady, Pa.	256,816	138	Joliet, Ill.	116,595	209	Albany, Ga.	58,353
69	Trenton, N.J.-Pa.	242,461	139	Port Arthur, Texas	116,145	210	Great Falls, Mont.	57,629
70	Albuquerque, N.Mex.	241,216	140	Waco, Texas	116,143	211	Tomball, Texas-Ark.	53,420
						212	Meriden, Conn.	51,850
						213	Tyler, Texas	51,739

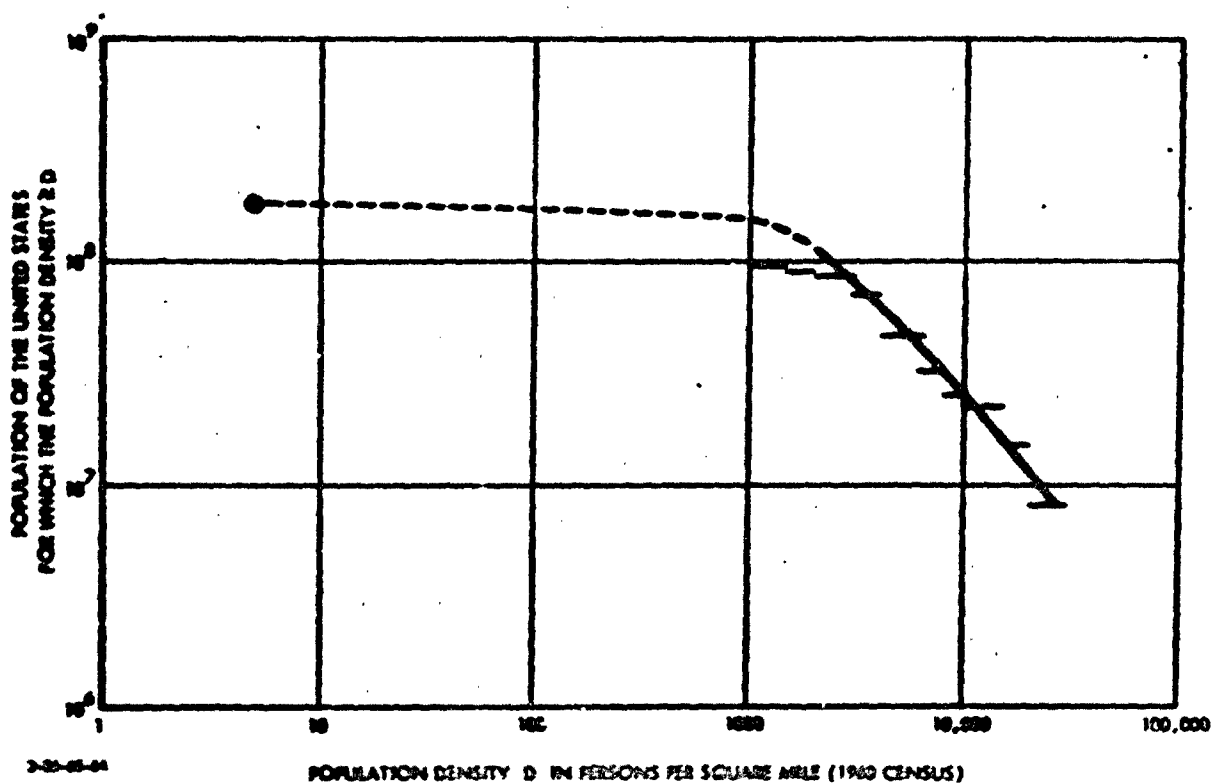



FIGURE 12. Estimate of the Population of the United States for Which the Population Density is $\geq D$ Persons/mi.² (1960 Census)

E. THE TARGETING MODEL APPLIED TO A SPECIFIC URBAN AREA

The 1960 population, land area, and population density of the Washington (D.C., Md., Va.) urbanized area are listed in Appendix A as follows:

<u>Urbanized Area</u>	<u>Population</u>	<u>Land Area (Mi.²)</u>	<u>Density of Population₂ (Persons/mi.²)</u>
Washington (D.C., Md., Va.)	1,808,423	340.0	5,308
Washington	763,956	61.4	12,442
Urban fringe	1,044,467	279.3	3,740

Further details on the character of this area as a population target are provided by the map of Figure 13, the population data of Table 6, and by an estimate of the amount of this urbanized area for which the population density exceeds any given amount (Figure 14).

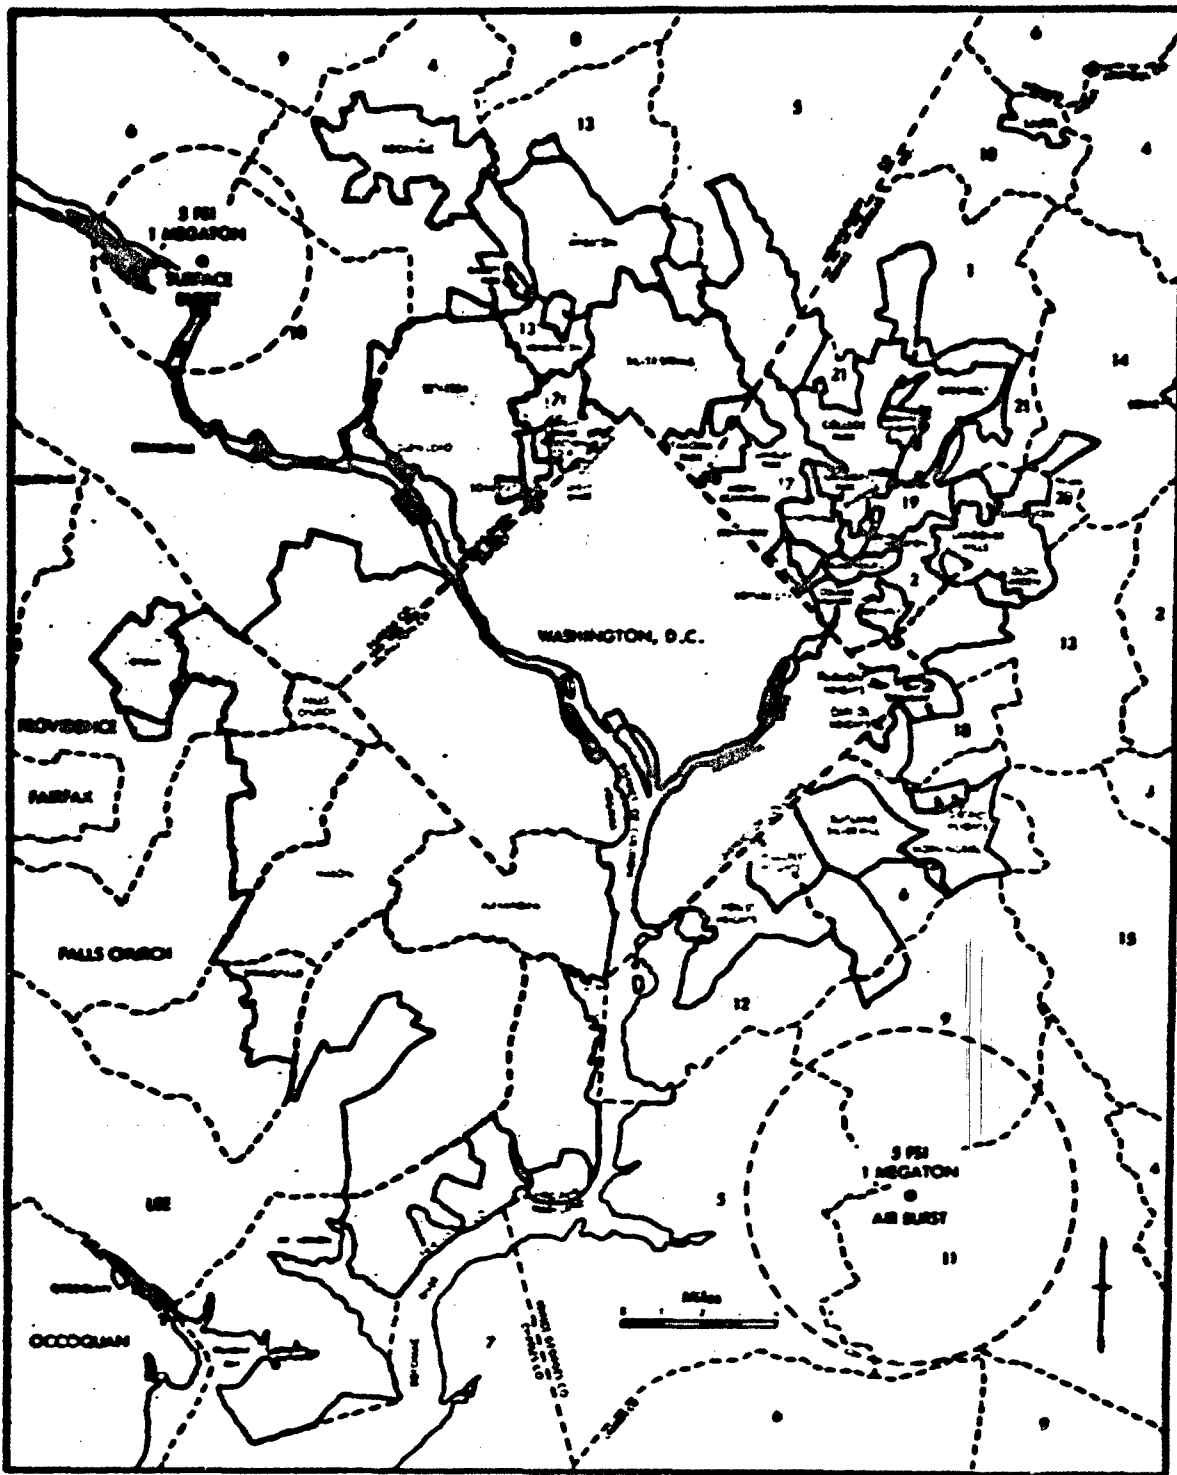

NOTE: Refer to Table VI for population of indicated subdivisions of Washington, D.C.

URBANIZED AREA

FIGURE 13. Washington (D.C., Md., Va.) Urbanized Area, 1960 Census

Table 6. POPULATION STATISTICS FOR THE WASHINGTON (D.C., MD., VA.) URBANIZED AREA, 1960 CENSUS

Area	1960	1950	Area	1960	1950
WASHINGTON (D.C.-MD.-VA.) URBANIZED AREA					
The area	1,000,423	1,267,323			
Washington, D.C.	763,956	682,178			
Outside central city	1,044,467	686,145			
The area includes the following eleven civil divisions and parts of minor civil divisions:					
In the District of Columbia					
Washington, D.C.	763,956	682,178			
In Maryland					
Montgomery County (part)	200,540	117,637			
Dist. 4, Rockville (part)	34,700	871			
Garrett Park town	950	824			
Rockville city (part)	20,000	(1)			
Dist. 5, Colsonville (part)	11,000	(1)			
Dist. 7, Bethesda	83,187	42,007			
Bethesda (U)	86,527	(1)			
Cherry Chase village	2,000	1,371			
Cherry Chase Section Four village	2,000	(2)			
Old Echo town	310	300			
Landover town	1,464	420			
Dist. 10, Potomac (part)	330	180			
Dist. 12, Wheaton (part)	100,837	74,241			
Washington town	2,176	1,611			
Rockville city (part)	---	(1)			
Silver Spring (U)	60,300	(1)			
Yakoma Park city (part)	11,500	9,371			
Wheaton (U)	84,823	(1)			
Prince Georges County (part)	200,400	126,870			
Dist. 1, Manassas (part)	5,223	570			
College Park city (part)	1,210	---			
Dist. 2, Staffordburg	31,823	17,394			
Staffordburg town	3,183	2,600			
Chowchly town (part)	4,911	3,117			
Calver Manor town	1,772	1,722			
College City town	1,000	1,300			
Adamsman town (part)	---	---			
Landover Hills town	1,000	1,001			
Dist. 3, Spaulding (part)	90,004	10,733			
Historic Heights town	7,524	1,700			
Willcrest Heights (U) (part)	13,000	(1)			
Marlingdale town	1,700	1,500			
Swilford-Silver Hill (U)	10,300	(1)			
Dist. 9, Surratt (part)	1,230	(1)			
Dist. 12, Sun Hill (part)	10,400	2,400			
Farmet Heights town	3,320	1,125			
Willcrest Heights (U) (part)	1,810	(1)			
			In Maryland--Con.		
			Prince Georges County (part)--Con.		
			Dist. 13, East (part)		
			13,960		
			2,466		
			Glenarden town		
			801		
			(1)		
			Dist. 14, Bowie (part)		
			1,262		
			(1)		
			Dist. 16, Spotsville		
			10,882		
			13,740		
			Edmonston town (part)		
			1,197		
			1,190		
			Spotsville city (part)		
			10,546		
			12,300		
			Dist. 17, Chillum		
			60,547		
			26,481		
			Broomfield town		
			3,502		
			3,523		
			Spotsville city (part)		
			522		
			Langley Park (U)		
			11,510		
			(1)		
			Mountainer city		
			9,500		
			10,000		
			North Broomfield town		
			804		
			830		
			Yakoma Park city (part)		
			8,204		
			3,950		
			Dist. 18, East Pleasant (part)		
			23,101		
			19,592		
			Capital Heights town		
			3,150		
			2,729		
			Covecroft town (part)		
			312		
			201		
			Faircrest Heights town		
			2,500		
			2,937		
			East Pleasant town		
			6,200		
			2,250		
			Dist. 19, Silverdale		
			10,000		
			12,100		
			Silverdale city (part)		

			(1)		
			College Park city (part)		

			Edmonston town (part)		

			(1)		
			Silverdale town		
			4,200		
			8,330		
			University Park town (part)		
			2,601		
			2,250		
			Dist. 20, Landon (part)		
			11,701		
			1,020		
			Carrollton city (part)		
			3,200		
			(1)		
			Glenarden town (part)		
			600		


			Dist. 21, Germantown (part)		
			20,200		
			10,041		
			Faircrest Heights town		
			9,370		
			670		
			College Park city (part)		
			17,504		
			11,170		
			Springdale city		
			7,570		
			7,070		
			University Park town (part)		
			7		

			In Virginia		
			600,007		
			221,732		
			Arlington County		
			163,001		
			139,449		
			Fairfax County (part)		
			200,071		
			26,061		
			Branfordville Dist. (part)		
			35,827		
			(1)		
			Falls Church Dist.		
			30,000		
			10,311		
			Lee Dist. (part)		
			31,000		
			(1)		
			Madison Dist. (part)		
			60,001		
			(1)		
			Springfield (U)		
			10,700		

			Mount Vernon Dist. (part)		
			60,070		
			11,400		
			Providence Dist. (part)		
			10,000		
			901		
			Vienna town		
			11,400		
			(1)		
			Alexandria City		
			91,003		
			61,707		
			Falls Church city		
			10,100		
			7,930		

1Not in area in 1950.
 2Not reported separately in 1950.
 3Incorporated since 1960.

Standard metropolitan statistical area, central city, and other component areas	1960	1950	Increase		Standard metropolitan statistical area, central city, and other component areas	1960	1950	Increase	
			Number	Percent				Number	Percent
WASHINGTON, D.C.-MD.-VA.									
Total	2,001,027	1,464,000	537,000	36.7	Washington, D.C.	763,956	682,178	-30,222	-4.0
Washington, D.C.	763,956	682,178	-30,222	-4.0	Stonemont city, Va.	91,823	61,787	29,136	47.3
Outside central city	1,237,071	681,822	555,249	81.6	Falls Church city, Va.	10,100	7,530	2,570	35.3
					Arlington County, Va.	163,001	130,449	27,552	20.6
					Fairfax County, Va.	270,000	90,000	180,000	170.0
					Montgomery County, Md.	340,000	160,000	180,000	100.0
					Prince Georges County, Md.	267,000	194,100	72,900	36.1

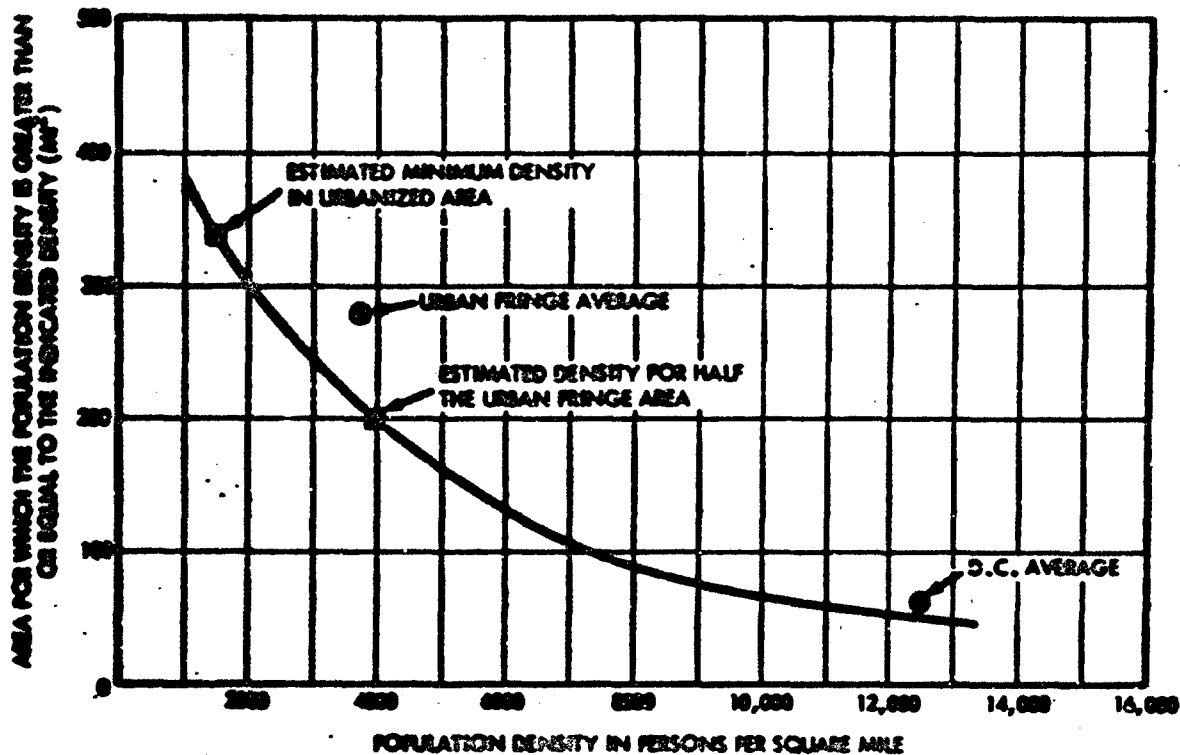

10-40

FIGURE 14. Estimated Area of the Washington (DC, Md., Va.) Urbanized Area for Which the Population Density Exceeds any Given Density

The total lethal areas (at the 5 psi level) of illustrative Attack Levels 1, 2 and 3 were summarized in Table 2. These areas may be translated into the minimum population density to be targeted throughout the whole United States through the curve of Figure 9, and thence into the area within the Washington, D. C. urbanized area to be targeted through the curve of Figure 14. The results, together with the number of 1-MT airbursts or surfacebursts allocated to the Washington area for each attack level, assuming all weapons had a yield of 1 MT, and all were either airburst or surfaceburst, are presented in Table 7.

Table 7 shows that for the three illustrative attack levels of Table 2, a minimum of one-fourth, and a maximum of all the Washington urbanized area -- always including all of the District

Table 7. WEAPONS ALLOCATION TO THE WASHINGTON URBANIZED AREA FOR ATTACKS WITH 1-MT WEAPONS

	Attack Level 1	Attack Level 2	Attack Level 3
	(100 1-MT bombs)	(200 1-MT bombs)	(1000 1-MT bombs)
Surfacebursts			
Density to target in D.C. (persons/sq mi)	2000	2000	2000
Estimated area to target to Washington, D.C. area (square miles)	20	100	200
Lethal area/weapon for 1-MT weapon (square miles)	23.8	23.8	23.8
Number 1-MT weapons assigned to Washington, D.C. area	3 or 4	7 or 8	12
Airbursts			
Density to target in D.C. (persons/sq mi)	2000	2700	1200
Estimated area to target to Washington, D.C. urbanized area (square miles)	162	200	200
Lethal area/weapon for 1-MT weapon (square miles)	20	20	20
Number 1-MT weapons assigned to Washington, D.C. area	3	4 or 5	6

of Columbia -- might reasonably be considered subjected to a blast overpressure of at least 5 psi (and therefore to a thermal pulse of 50 cal/cm²). The total number of 1-MT weapons allocated to this area is seen to lie between 3 and 12, depending on the level of the attack and whether or not targeting was done on the basis of airbursts or surfacebursts. The actual ground zero, for any given type and level of attack, could be selected in a variety of ways and still subject approximately the same number of persons to 5 psi.

It would be possible to be more precise as to the most de-

sirable ground zeros provided there were population density contour maps of the Washington urbanized area in which the density at any given point is defined as the number of persons included within a weapon's lethal area centered on that point. Use of the lethal area as the unit of area for density computational purposes would smooth out the substantial density variations between nearby communities when a square mile is the unit area. This means that there would be different population density contours for weapons of different yield, and for weapons of the same yield, depending on whether or not they were airburst or surfaceburst.

From the estimate of area to be targeted shown in Table 7 and the lethal areas of the 8- and 64-MT weapons shown in Table 1, it could be concluded that from 1 to 3 8-MT weapons, or (for Attack Level 3) even a single (surfaceburst) 64-MT weapon would

not be an unreasonable assignment of megatonnage to the Washington urbanized area. It also follows that a combination of 1- and 8-MT weapons (with combined lethal area equal to the area of the density of population to be targeted) or a combination of airbursts and surfacebursts could reasonably be included in a potential enemy's targeting for this area. Needless to say, under the assumption of an attack on populations, these weapons could be scheduled to arrive in many different ways, from many different sources, and at varied intervals after the commencement of hostilities. Under the conditions of war, all, or none, or some fraction of those scheduled to be delivered might in fact be delivered, and those that arrived might or might not arrive with sufficient warning for the immediate population affected to take shelter.

The most important result of the analysis from the point of view of shelter design considerations is that an attack on population does not necessarily result in a single bomb being targeted at the center of each metropolitan area with total population exceeding some given number of persons. Some cities may receive no bombs at all, and others may receive a great many. For example, for a surfaceburst attack on populations with 300 1-MT bombs, approximately half the 213 urbanized areas listed in Table 5 would be allocated no weapons at all, whereas Los Angeles would be targeted with about 21. These assignments would change as the attack level and weapon yield are varied. But the threat to urban populations -- which by 1970 will include 80 percent of the U.S. population -- is much greater than that to rural population, and for some urban concentrations -- notably the larger ones -- it is much greater than others. For the Washington (D.C., Md., Va.) urbanized area, viewed as a population target, the effectiveness of fallout shelters in an attack designed to maximize population fatalities would likely depend on their ability -- and that of the people in them -- to withstand blast in the range of 5 to 30 psi (see Figure 10) and the associated

thermal effects as well as subsequent fallout. This does not necessarily mean, all things considered, that it is not worthwhile to locate and provision fallout shelters in large urban areas. A full and excellent discussion of the benefits and limitations of such a program has been recently given by Secretary McNamara,¹ and is reproduced in its entirety in Appendix B. The present treatment illustrates some of the implications of the Secretary's remarks when considered from the differing point of view of persons in the 213 largest urbanized areas of the United States listed in Table 5.

¹Hearings on the Department of Defense Appropriations for FY 1964, U.S. House of Representatives, Part I, Page 110 (Secretary McNamara's statement given on February 7, 1963).

PART II. THE INTENSITY AND DISTRIBUTION OF INITIAL AND RESIDUAL RADIATION

A. GENERAL CONSIDERATIONS

In contrast to the blast and thermal effects of nuclear weapons, the initial gamma rays and neutrons from a nuclear burst, and the delayed gamma and beta rays from fallout are a threat to biological systems, but not to structures. The hazard is complex and subtle in that the potentially harmful radiations are not sensed by the body and the many different biological effects are delayed in time from an hour or so to many years following exposure. The individual fallout particles, which contain the radioactive byproducts of the fission and fusion processes imbedded in or on a mass of inert materials, cover a wide range in size. Some are as big as grains of sand, others as small as particles of dust. In highly contaminated areas, the total bulk of fallout material deposited from a surfaceburst would be clearly visible in daylight as long as meteorological conditions permit the particles to settle and be retained on foliage or on smooth surfaces. It is very difficult to predict when the fallout will come to earth, but it is known that potentially lethal concentrations of radioactivity can be deposited hundreds of miles from the point of detonation, and that it can cover an area an order of magnitude greater than the area where fatalities are produced by blast. The hazard persists in time. Although the immediate and greatest danger is from gamma (X-ray like) radiations from the fallout particles, these particles also emit beta rays (electrons) which can cause burns if fresh fallout comes in contact with the skin and is not promptly washed off. There are several short- and long-lived

radionuclides among the fission products -- notably I-131 (half-life 8 days), Sr 90 (half-life 28 years), and Cs-137 (half-life 30 years) -- which can produce an internal hazard via the food chain.

The type and amount of radioactive material which may be deposited in an area where shelters are to be constructed affects shelter design directly by indicating the amount of shielding necessary to hold radiation exposure of the shelter occupants to within specified limits, and indirectly by influencing the length of time the shelter must be occupied, continuously or partially, to hold dose levels within specified limits. Shelter stay times are also affected by fallout levels in other than the immediate area of the shelter, and by the level of radiation exposure which is to be permitted over various intervals of time. In fact, almost every way in which fallout affects civil defense activities outside the shelter has an influence on shelter stay times, and thus on the space requirements within the shelter for food, supplies, and equipment.

In developing estimates as to the levels of blast, thermal pulse, and initial nuclear radiation that might reasonably be anticipated at specific locations in the United States in the event some fraction of a nuclear attack on this country were targeted in such a way as to maximize population fatalities, the principal variables are the numbers and yields of the weapons employed, whether they are assumed to be burst in the air or on the surface, and the targeting criteria.

Comparable estimates of the external gamma doses and dose rates from the fallout involve additional important uncertainties:

- The speed and direction of the wind at all altitudes up to the top of the mushroom cloud, and at all locations throughout the United States,
- Precipitation patterns throughout the United States,
- The level and distribution of attack on military targets,

- The fraction of the total yield of each weapon due to fission,
- A method of estimating the distribution and deposition times of the radioactivities from a single surfaceburst, when all the factors listed above are specified precisely.

Large uncertainties and variations in estimates of fallout doses and dose rates at specific locations are introduced by each of these factors, in addition to the uncertainties present in estimates of the distribution and intensity of the immediate effects.

E. RADIATION DOSE UNITS¹

The effect of nuclear radiations on a biological system is expressed in terms of an "absorbed dose". The rad is defined as the absorbed dose of any nuclear radiation which is accompanied by the liberation of 100 ergs of energy per gram of absorbing material. Although all ionizing radiation (gamma rays, X rays, beta rays, neutrons, protons, alpha particles, etc.) are capable of producing similar biological effects, the absorbed dose measured in rads which will produce a certain biological effect may vary appreciably from one type of radiation to another. This difference in behavior is expressed by means of the "relative biological effectiveness" (RBE) of a particular nuclear radiation. The RBE is defined as the ratio of the absorbed dose in rads of gamma radiation to the absorbed dose in rads of the given radiation having the same biological effect.

The value of the RBE for a particular type of nuclear radiation depends on several factors, including the energy of the radiation, the kind and degree of biological damage, and the nature of the organism or tissue under consideration.

¹The Effects of Nuclear Weapons, op cit., Paragraph 11.80 et seq; and RAND R-425-PR A Review of Nuclear Explosion Phenomenon Pertinent to Protective Construction, H. L. Brode, May 1964.

The rem is defined as (dose in rads) x (RBE).

The roentgen is a measure of radiation exposure dose from alpha or X rays (as opposed to absorbed dose), and is defined as the quantity of X or gamma radiation such that the associated ionization per 0.001293 grams of air produces, in air, a charge carrying one electrostatic unit of electricity. (The mass of one cm³ of dry atmospheric air is 0.001293 grams at 0°C and 760 mm of mercury pressure.)

The RBE for gamma rays is approximately unity, by definition, although it varies somewhat with the energy of the radiation. Because one roentgen exposure dose gives rise to about one rad absorbed dose in tissue for photons of intermediate energy (0.3 to 3 mev), the absorbed dose for gamma (or X) rays is often stated, somewhat loosely, in roentgens.

The RBE for beta particles is close to unity. The RBE for alpha particles from radioactive sources has been variously reported to be from 10 to 20, but this may be too large. For nuclear weapon neutrons, the RBE for acute radiation injury is taken as one, but it is appreciably larger where the biological effect considered is the formation of opacities of the lens of the eye (cataracts).

EQUIVALENT RESIDUAL DOSE (BIOLOGICALLY EFFECTIVE DOSE)

Human exposure to fallout radiations can lead to different types of biological damage;

- a. Sickness or death within 2 hours to 6 months, depending on the total dose delivered and the dose rate and time interval over which it is delivered,
- b. Shortening of life and the development of various kinds of malignant neoplasms from 1 to 20 years following exposure,
- c. Changes in the genetic material of the individual exposed which may result in the genetic death of a future descendant -- perhaps many generations later -- and/or in some degree of physical disability to several descendants.

Damages of Types b and c are probably also dependent on the dose rate and the time interval over which the dose is delivered, but to a lesser extent than the type of injury listed under a.

The notion of biological dose or equivalent residual dose (ERD) is an attempt to equate the clinical manifestations of radiation injury of Type a resulting from a protracted dose (i.e., a dose delivered over a period greater than about four days) with a brief dose (a dose delivered over a period less than four days). The assumptions made for computing the equivalent residual dose may be described as follows. Any radiation dose may be considered as consisting of two parts, a reparable dose, D_R , and an irreparable (permanent) dose, D_P . The irreparable dose, D_P , consists of 10 percent of the total dose. The reparable dose, D_R , is constantly being repaired by the body at a rate of about 2-1/2 percent per day. Thus if $r(t)$ is the dose rate in roentgens/hour,

$$\frac{d D_P}{dt} = 0.1 r(t)$$

$$\frac{d D_R}{dt} = 0.9 r(t) - 0.00104 D_R$$

At any time after irradiation stops, the dosage which has been accumulated over a period of time is assumed to correspond, in its clinical manifestations, to a brief dose = $D_P + D_R$.

The implications of this concept is that one-tenth of any dose accumulated is permanent as regards damage of Type a above, and that the effect of the remaining nine-tenths of the accumulated dose is constantly being repaired in such a way that any time irradiation stops, only one-half of the reparable dose D_R will remain after 30 days.

The decay rate from a given amount of fallout deposited on the ground is such that the equivalent residual dose accumulated at a point three feet above the ground from one hour following

etonation reaches a maximum at about four days following detonation and this maximum is approximately equal to the four-day total dose. If the equivalent residual dose is computed starting six hours after detonation, it reaches a maximum at about one week following detonation, and this maximum is approximately equal to the total dose accumulated from six hours to one week. Since the total dose from six hours to four days is about 90 percent of the total dose from six hours to one week, and an even larger fraction of the one-week dose is accumulated from one hour to four days the maximum biological dose from any fallout deposited between one and six hours (or thereabouts) will be approximately equal to the total dose accumulated during the first week.

The clinical features of radiation injury of Type a resulting from various levels of brief or equivalent residual doses are described in Appendix C.

. INITIAL NUCLEAR RADIATION

The initial nuclear radiation from a weapon burst is defined as that emitted by a weapon burst and its radioactive by-products within one minute from the instant of detonation. As a civil defense hazard, it consists of high-energy gamma photons and neutrons. For a 20-KT device, about 80 percent of the total gamma dose received is delivered within three seconds. For a 1-MT device, 80 percent is delivered in about eight seconds. The neutrons are released essentially instantaneously.

Table 8. INITIAL DOSE VERSUS DISTANCE - 1 MT^a

Distance (mi)	Gamma-Ray Dose (roentgens)	Neutron Dose (rads)	Overpressure (psi)
2.0	~66	~0.15	~10
1.5	~700	~11.00	~20
1.0	~10,000	~1,000.00	~50
0.5	~500,000	~173,000.00	~200

^aThe numerical values given above were received from Dr. Spahn on 10 Apr 51. They differ from the values given on p. 15 of HARS R-423-50, but are consistent with the formulas presented on p. 16 of that document.

An estimate of the relative contribution to the total dose (in rads or rems) from the initial gamma photons and neutrons is shown in Table 8.

An important feature of the initial gamma radiation as opposed to the residual gamma

radiation is the greater penetrability of the initial nuclear radiation. The tenth-value thickness of earth for initial gamma radiation is about 26 inches, whereas it is only 12 inches for the residual gamma radiation. The overall radiation reduction (protection) factor for a given thickness of earth for each of these two types of radiation is shown in Figure 15.

Figure 16 shows the initial nuclear radiation and overpressure as a function of range and yield for a surfaceburst.¹ According to Figure 16, the initial nuclear radiation from a 1-MT surfaceburst is less than one rem whenever the overpressure is less than 5 psi. However an overpressure of 30 psi (the approximate radius of the fireball) corresponds to an initial dose of 10^4 rem, and an overpressure of 100 psi to an initial dose of about 2.6×10^5 rem, for a 1-MT burst.

These estimates are qualified in the Effects of Nuclear Weapons as follows (par. 8.27):

"The data are based on the assumption that the average density of the air in the transmission path, between the burst point and the target, is 0.9 of the normal sea level density. Because of variations in weapons design and the different characteristics of the gamma rays associated with fission and fusion, as well as for other reasons (par. 8.85) the gamma ray doses calculated from Figs. 8.27 a and b cannot be exact. For yields from about 1 to 100 kilotons TNT equivalent, they are reliable within a factor of two or so; from 100 kilotons to 1 megaton, within a factor of 5; and above 1 megaton, within a factor of about 10."

The data of Figures 15 and 16 illustrate an important consideration for the design of blast shelters in the 30 to 100 psi range; namely, that protection against blast and residual radiation does not automatically guarantee protection against initial radiation. Suppose, for example, a 30 psi shelter has a PF of 1000 against residual radiation -- i.e., the protection equivalent to about 36 inches of earth. The same thickness of earth

¹From Fig. 2.16, discussion p. 46, USAEC CEX-62.2 Nuclear Bomb Effects Computer, Fletcher et al, February 1963.

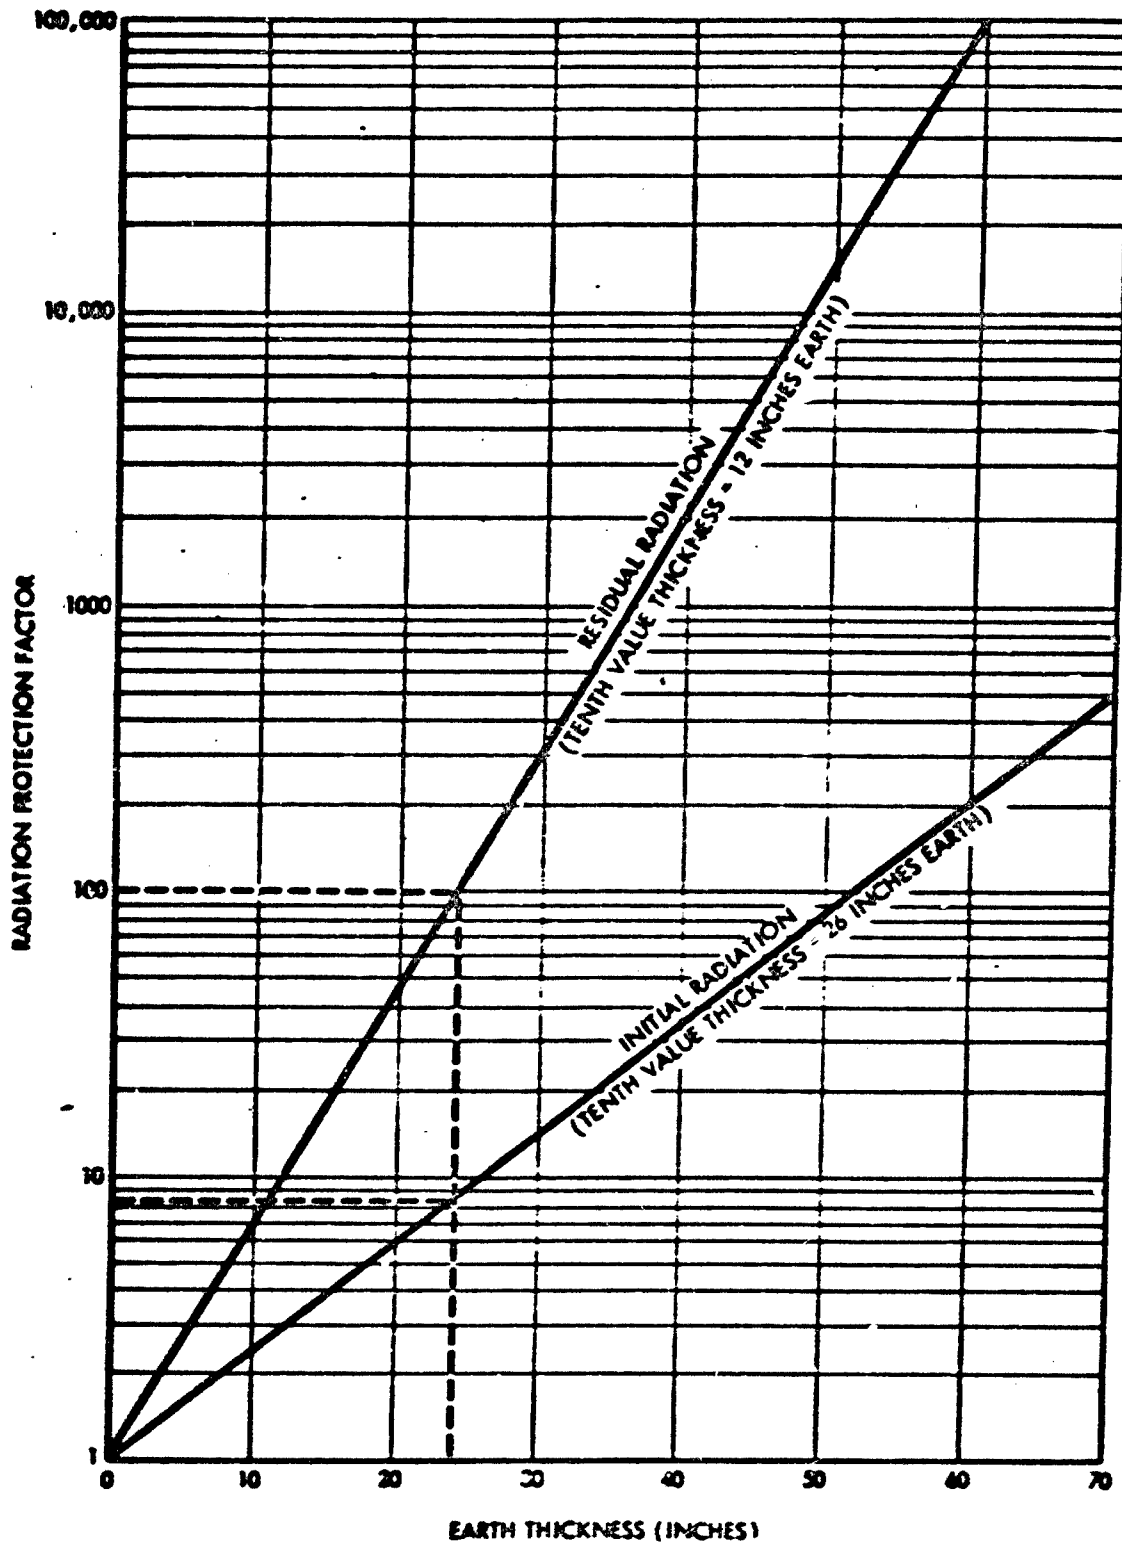


FIGURE 15. Radiation Protection Factor Vs. Earth Thickness for Initial and Residual Gamma Radiation

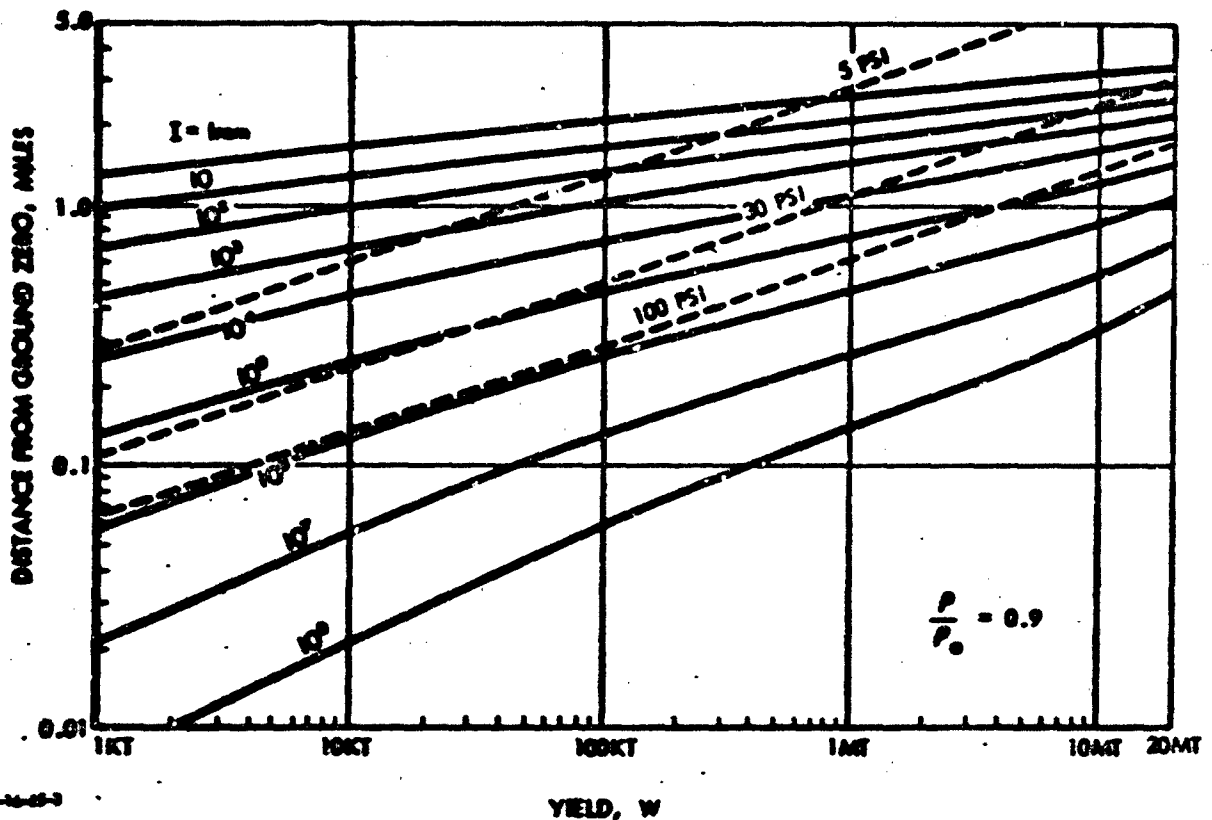


FIGURE 16. Initial Nuclear Radiation and Overpressure as A Function of Range and Yield for Surface Bursts

would give a protection factor of about 25 from the initial radiation. A protection factor of 25, applied against a dose of 10^4 rem at the 30 psi blast level, would result in a total in-shelter dose of 400 rem. Similarly a 100 psi blast shelter with a PF of 10,000 (48" earth) against residual radiation gammas might offer a PF of only 70 against the initial gammas. Since 100 psi corresponds to 2.6×10^5 rem for a 1-MT surfaceburst (Figure 16), there is a possibility at the 100 psi level of an in-shelter dose of about 3700 rem. These estimates are very rough because no consideration has been given to the different geometrical relationships between the radiation source and the shielding material in the two cases, and because of the large

uncertainties in the initial radiation dose level noted above. Further, they are based on a 1-MT surfaceburst. They do illustrate, however, the necessity to take initial radiation into account when designing blast shelters in the 30 to 100 psi range, and the very large amount of shielding that may be required to protect against initial nuclear radiation at these levels of blast.

2. RESIDUAL NUCLEAR RADIATION

Residual nuclear radiation is defined as that radiation emitted from the radioactive byproducts of a nuclear explosion later than one minute from the instant of the explosion. The sources and characteristics of this radiation vary with the percentage contribution of fission and fusion to the energy release of the weapon. Those radioactivities induced by neutron capture in earth and bomb materials are of immediate interest only in weapons whose fission fraction is less than about 10 percent.¹ Otherwise, as shown later, the gamma radiation they emit is dominated by that from the fission products.

When uranium (or plutonium) undergoes fission, about one-tenth of 1 percent of the mass of the fissioning atoms is converted to energy. The rest is accounted for by over 200 different isotopes of 36 different elements. Each fissioning uranium atom gives rise to a pair of fission products whose mass is almost that of the unsplit atom. For each kiloton of energy

For some weapons, neptunium 239 (half-life 2.3 days, average gamma photon energy = 0.27 mev) may be created in such quantity as to constitute a significant hazard in addition to the fission products. See Table 10.


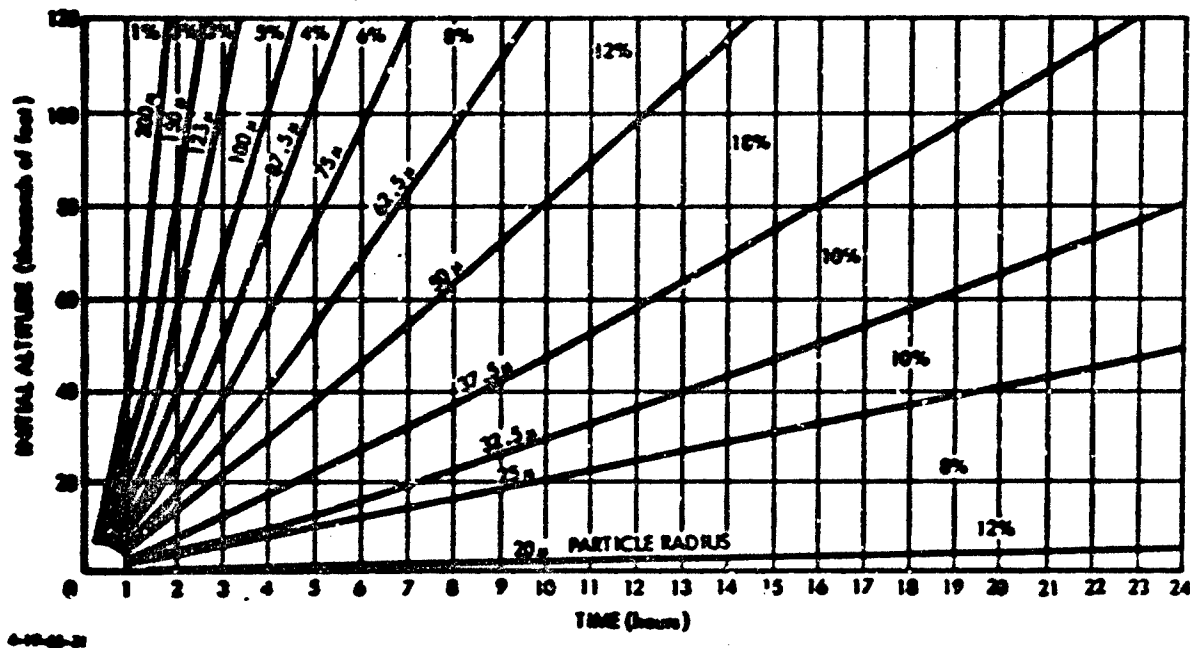


FIGURE 17. Times of Fall of Particles of Different Sizes from Various Altitudes and Percentages of Total Activity Carried (Reproduced from "The Effects of Nuclear Weapons")

released,¹ 56 grams of uranium = 1.45×10^{23} uranium atoms are fissioned.

When a nuclear weapon is burst in the air, the mass of the fallout particles consists of the weapon casing and the fission fragments. The particle diameters lie largely in the range of 2 to 12 microns, and most of the particles take weeks or months to reach the earth. Under these circumstances most of the radioactivities which give rise to an external gamma radiation hazard decay harmlessly in the air. However, long-lived internal

¹By definitions, 1 kiloton is 10^{12} calories = 4.2×10^{19} ergs
 = 1.15×10^6 kilowatt hours
 = 2.64×10^{25} mev

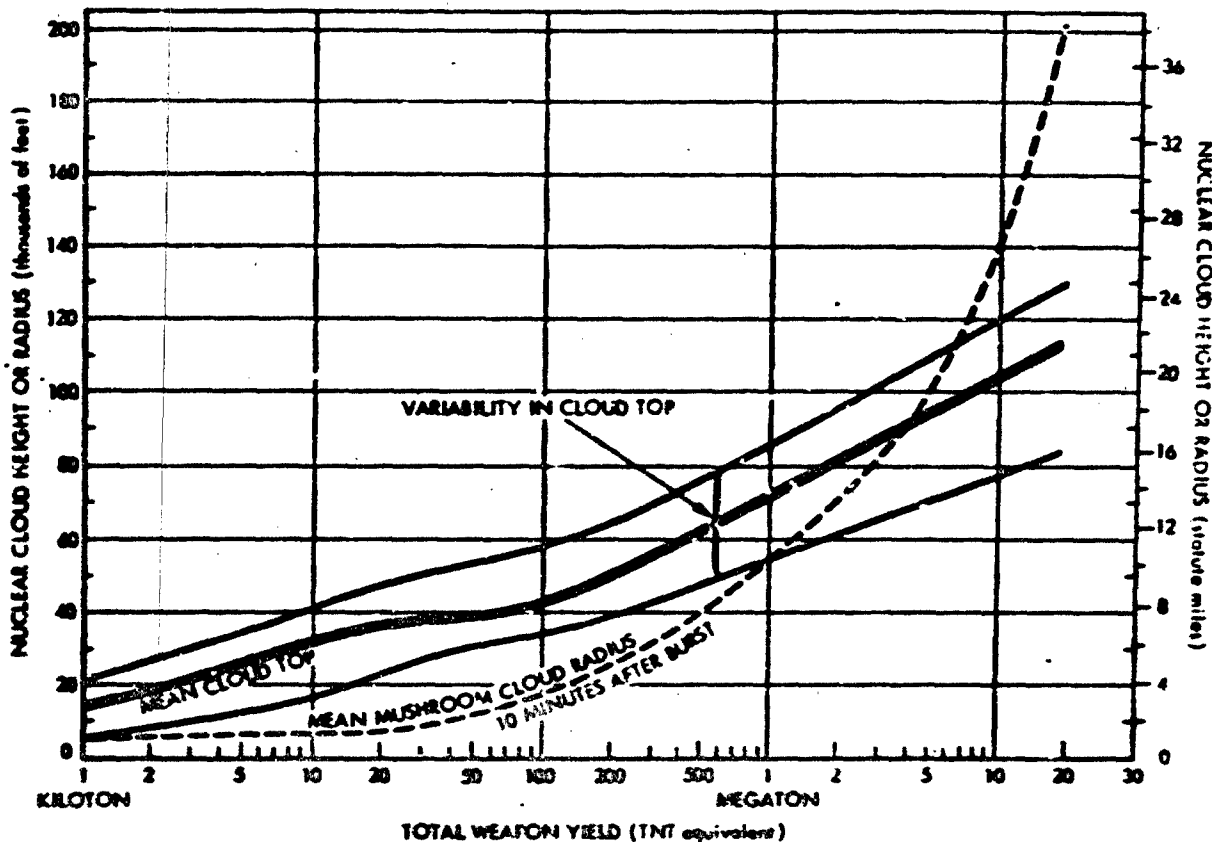

4-17-62

FIGURE 18. Approximate Nuclear Cloud Dimensions

emitters (strontium 90, half-life 28 years; cesium 137, half-life 30 years), if deposited in sufficient concentrations, can still present an internal hazard via the food chain.

The approximate distribution of the radioactive material from a surfaceburst on particles of different sizes and the time required for these particles to fall from different altitudes are shown on Figure 17. The approximate height and radius of the top of the mushroom cloud into which the fallout particles are lifted by rising air currents before being scattered by the winds are shown in Figure 18.

Many different mathematical models of varying degrees of complexity have been developed to predict when and where the

particles of different sizes will be redeposited on the earth. It is evident that the answer must depend on the speed and direction of the winds, or more exactly, on the speeds and directions of the wind at different altitudes and different locations of the fallout pattern. The results of the various models differ widely,¹ and no one is sure which model is more correct or whether or not any of them are sufficiently accurate to give a reliable estimate of what doses and dose rates will actually be experienced at various locations on the ground at various times following a nuclear detonation.

An illustration of the difference between a predicted and an actual fallout pattern is shown in Figure 19.

In spite of the great difference possible between predicted and actual fallout patterns, it is assumed that idealized patterns are useful as an indication of the shapes and levels of fallout deposition patterns which could reasonably be anticipated as a result of surfacebursts of different yields, under different conditions of wind. It should be noted that currently available fallout models assume that no precipitation or irregular wind conditions occur in the area where the fallout particles are deposited.

F. DOSES AND DOSE RATES FROM A UNIFORM DISTRIBUTION OF FISSION PRODUCTS ON THE GROUND

It is a common assumption of most fallout models that only the fission product radioactivity will be directly considered in the computations, and that the fission products will be considered unfractionated -- that is, the relative concentrations of the many different radionuclides present in any sample of fallout are the same as for the radioactive debris taken as a whole.

¹TID-7632 Radioactive Fallout from Nuclear Weapons Tests, proceedings of a conference held in Germantown, Maryland, November 15-17, 1961 USAEC.

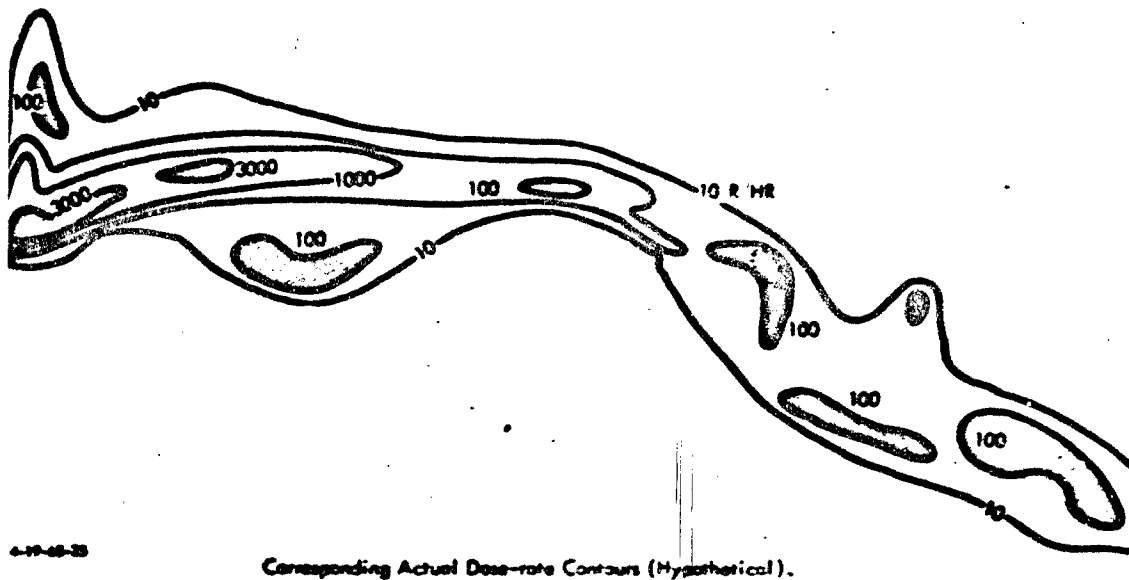
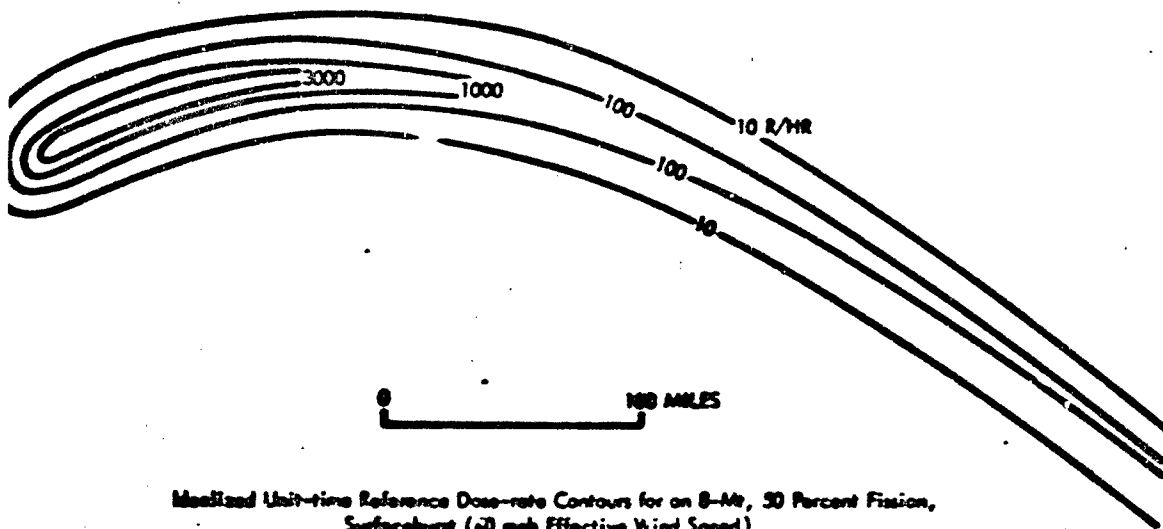


FIGURE 19. Predicted and Actual Fallout Dose-rate Contours

With this assumption, there exists a simple, time-invariant description of the fallout contamination level at a given location, namely the number of kilotons-equivalent of fission products deposited per unit area. External gamma dose rates and accumulated doses three feet above a smooth, infinite plane contaminated to a level of 1 KT per square mile are shown in Table 9.

Table 9. GAMMA DOSE RATE AND ACCUMULATED DOSE 3 FEET ABOVE A SMOOTH, INFINITE PLANE^a

Dose Activity Curie/mi. ² (NSRL 78-167 P. 7 Et Seq. From Graphs)	Time After Fission	Dose Rate r/hr. (NSRL 78-247 P. 13 Et Seq. From Graphs)	Accumulated Dose From 1 hr. to r (NSRL 78-247 P. 31 Et Seq. From Tables)	Interval Dose in r	Dose From Time Indicated to:			
					1 Day	1 Week	1 Month	1 Year
	1/2 hr.	3720	-2400					
4.00 x 10 ⁶	1 hr.	3720	0	2382	7407	6667	10,723	11,820
1.00 x 10 ⁶	2 hrs.	1630	2382	1119	5216	7126	8,341	9,238
1.00 x 10 ⁶	3 hrs.	853	3621	768	4676	6046	7,262	8,299
0.02 x 10 ⁷	4 hrs.	577	4221	495	3376	4346	6,562	7,599
0.70 x 10 ⁷	5 hrs.	432	4716	362	2861	4061	6,067	7,104
1.09 x 10 ⁷	6 hrs.	306	5000	1367	2499	4009	5,825	6,722
2.05 x 10 ⁷	12 hrs.	182	6446	768	1162	3122	4,276	5,375
1.09 x 10 ⁷	16 hrs.	91.0	7151	446	646	2613	3,572	4,669
1.30 x 10 ⁷	1 day	60.4	7597	666	0	1970	3,126	4,223
4.00 x 10 ⁶	2 days	21.8	8063	292		1114	2,276	3,367
2.70 x 10 ⁶	3 days	12.5	8645	236		722	1,876	2,975
2.02 x 10 ⁶	4 days	8.90	9195	200		672	1,626	2,725
1.00 x 10 ⁶	6 days	7.02	9294	166		589	1,439	2,536
1.30 x 10 ⁶	6 days	5.02	9439	126		120	1,294	2,381
1.30 x 10 ⁶	7 days	4.90	9667	296		0	1,166	2,253
0.00 x 10 ⁶	10 days	3.43	9863	276			666	1,957
0.00 x 10 ⁶	2 weeks	2.34	10,127	267			566	1,863
2.00 x 10 ⁶	3 weeks	1.51	10,450	266			265	1,762
2.00 x 10 ⁶	1 month	.906	10,723	266			0	1,667
1.30 x 10 ⁶	2 months	.368	11,166	432				666
7.25 x 10 ⁶	3 months	.213	11,264	126				666
5.17 x 10 ⁶	4 months	.140	11,462	63				326
3.00 x 10 ⁶	5 months	.111	11,576	70				266
2.00 x 10 ⁶	6 months	.0832	11,646	121				176
1.47 x 10 ⁶	9 months	.0764	11,706	96				96
0.70 x 10 ⁶	1 year	.0646	11,820	96				0
1.00 x 10 ⁶	3 years	1.11 x 10 ⁻³	11,879	96				
2.00 x 10 ⁶	30 years	3.06 x 10 ⁻³	11,906	119				

^aUniformly contacted with unfractionated fission products from the thermal fission of U-235 at a density of 1 kiloton-equivalent of fission products per square mile.

An alternate, time-independent method of describing a fallout contamination level is in terms of the roentgens/hour infinite plane dose rate, normalized to one hour -- that is assuming that all the fallout which is eventually deposited at a given location has in fact been deposited at one hour following the detonation. The relation between those two descriptions is indicated in Table 9; i.e., 1 KT/mi² = 3720 r/hr at 1 hr.

Table 10. APPROXIMATE CONTRIBUTIONS OF INDUCED ACTIVITIES AND FISSION PRODUCTS TO FALLOUT INFINITY DOSE

Activity	Half-Life	Average Mev/ Disintegration	Infinity Dose in Roentgens						
			Normal Weapon Surfaceburst			Normal Weapon Airburst			Clean Weapon Surfaceburst
			Low	Typical	High	Low	Typical	High	Typical
U-240.	14.2 hrs.	0.34	10	60	.	10	60	300	
Na-24	15 hrs.	4.10	50	250	60	1	5	10	
Kp-239	2.33 days	0.27	40	250	900	40	250	900	
U-237	6.75 days	0.16	35	150	350	35	150	350	
Fe-59	45.1 days	1.10	0	1	2	0	1	2	
Co-58	72 days	0.97	1	2	20	1	2	20	
Co-57	270 days	0.13	0	1	10	0	?	10	
Mn-54	300 days	0.04	1	3	30	1	3	30	
Co-60	5.3 yrs.	2.50	3	20	30	3	10	30	
Mn-56	2.6 hrs.	1.80	15	100	600	0	0	0	
Total Induced				837			492		500
Fission Products				6000			6000		600

NOTE: Normal weapon assumed 50 percent fission yield. Clean weapon assumed 5 percent fission yield. Fission products assumed unfractionated. Infinity dose = dose from 1 hour to ∞ hours.

SOURCE: USAEC External Gamma Doses and Dose Rates from the Fallout from Nuclear Explosions. H. A. Knapp. Fallout Studies Branch, Div. Biology and Medicine, May 16, 1960, reprinted P. 527 et seq. Hearings on Civil Defense before a Subcommittee of the Committee on Government Operations, 86th Congress, March 1960.

It is clear from Table 9 that the doses and dose rates experienced at a given location at various times following a nuclear burst will depend very much on how long it takes for all the fallout which is going to be deposited at a particular location to be deposited. Fallout deposition times, as with other features of the fallout models, are subject to large uncertainties. At areas close to the point of detonation (say in areas of 30 psi overpressure or more) some fallout (or throwout) will begin within minutes. At greater distances -- it is estimated¹ that the time of fallout arrival is about 24 minutes. One hundred miles from the point of detonation the fallout may not begin for 4 to 6 hours and it may last for several hours.

An estimate of the approximate contribution of induced activities to the infinity (approximate 1 year) dose from clean and normal weapons is shown in Table 10.

The Effects of Nuclear Weapons, op cit., par. 9.84.

G. CONTAMINATION LEVELS AND ACCUMULATED DOSES IN AN IDEALIZED FALLOUT PATTERN: SCALING WITH YIELD AND WIND

Fallout particles of a size large enough to be visible against a white sheet or paper -- say those with diameters in excess of 50 microns¹ -- are for the most part deposited within 24 hours from the time of detonation. They contribute the most immediate and most predictable threat from the fallout of a single-weapon burst. That portion of the fallout which occurs within 24 hours is (somewhat arbitrarily) called early fallout, as opposed to delayed fallout which occurs after 24 hours. It is the doses and dose rates from early fallout which one attempts to define with an idealized fallout pattern. For land surfacebursts in the megaton range, it is estimated that from 50 percent to 70 percent of the radioactivity created by the nuclear explosion will be deposited as early fallout.

Sample fallout patterns from the fallout model described in The Effect of Nuclear Weapons are shown in Figures 20 and 21. Figure 20 illustrates how the total dose may accumulate during the first 18 hours following detonation. Figure 21 shows the time-invariant level of contamination, and may be used in conjunction with Table 9 to obtain accumulated doses and dose rates once all the fallout at a given location has been deposited.

The dose rates and doses shown in Figures 20 and 21 are for a 1-MT surfaceburst of 100 percent fission yield. They must be scaled down by a factor equal to the fraction of the total yield due to fission. This fraction is normally taken as 1/2 for illustrative purposes, although fractions as low as 1/3, and as high as 2/3 indicate the general range of uncertainty introduced by this factor.

¹1 micron = 10^{-6} ; meter = 10^{-3} millimeter.


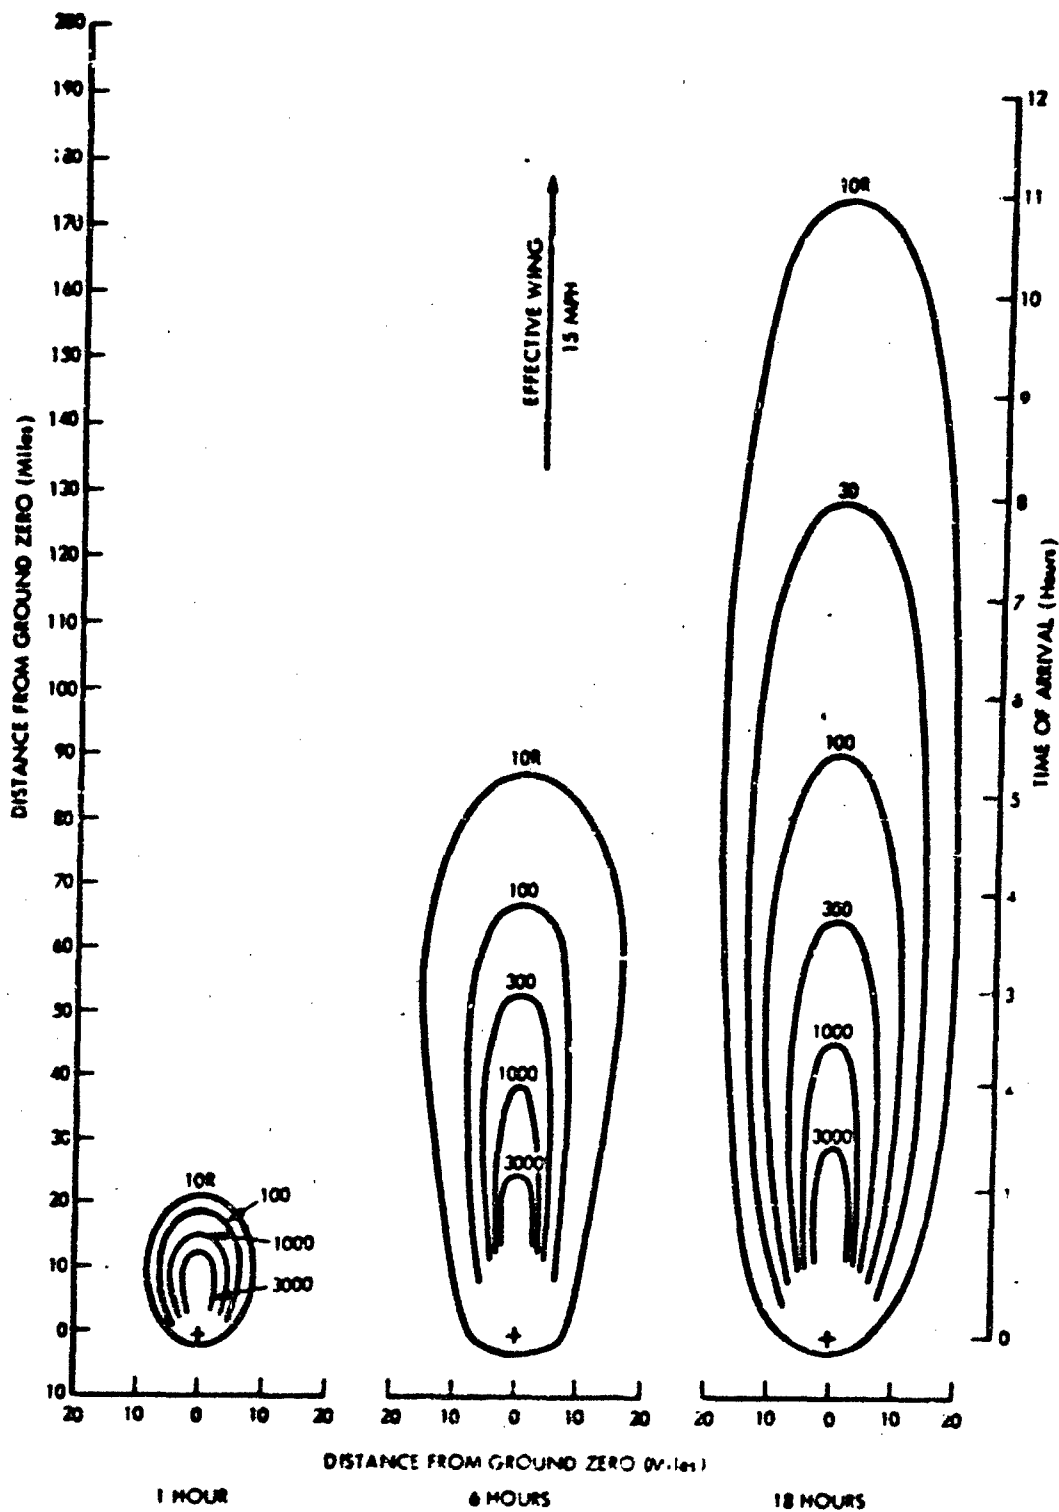


FIGURE 20. Total Dose Contours from Early Fallout at 1, 6, and 18 Hours After Surfaceburst with 1 MT Fission Yield (15 mph Effective Wind Speed).

4-19-65-20

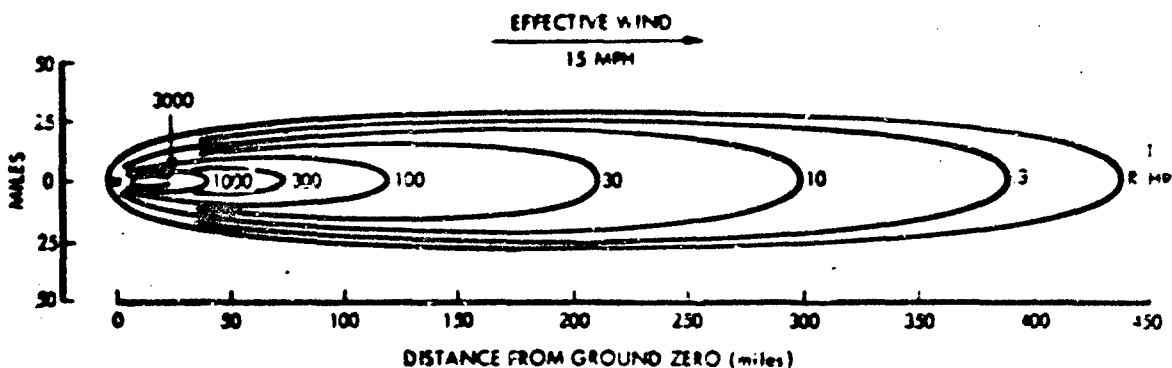

6-19-66-27

FIGURE 21. Idealized Unit-time Reference Dose-rate Pattern for Early Fallout from a 1 MT Fission Yield Surfaceburst (15 mph Effective Wind Speed).

An important factor to consider in connection with the fallout contours given in Figure 21 is how they scale with yield and wind. This is described in The Effect of Nuclear Weapons as follows:

"In order to obtain the idealized fallout pattern for a fission yield of F megatons, the values of the various contour lines in Fig. 9.73 may be multiplied by F . Thus, for a weapon having a total yield of M megatons with 50 percent of the energy derived from fission, the factor would be $0.5M$. This scaling procedure, although highly simplified, gives reasonably good results for surface bursts from about 100 kilotons to 10 megatons fission yield. However, the higher values of dose rate (and dose) are probably overestimated for fission yields in excess of 1 megaton. Except for isolated points in the immediate vicinity of ground zero, observations indicate that unit-time reference dose rates greater than about 10,000 roentgens per hour are unlikely. A possible reason is that as the weapon yield increases so also does the initial volume of the radioactive cloud; hence, the maximum concentration of activity in the cloud does not change very much with the yield. The fallout contamination moderately near ground zero, where the dose rate is high, will thus not increase in proportion to the yield, as the sample scaling law given here implies. At greater distances downwind the law is much more reliable because as a result of spreading by the wind, the initial cloud volume has relatively little influence on the concentration of fallout on the ground.

"9.76 It should be noted that the proportional scaling procedure makes no allowance for the effect of the total i.e., fission plus fusion, yield; thus it predicts the same fallout pattern for a 1-megaton all-fission detonation as for a 2-megaton 50-percent fission explosion. Actually, the unit-time reference dose rate near ground zero might be somewhat smaller in the latter case because the same amount of radioactivity would be spread through a larger volume of the initial cloud. At greater distances downwind from the burst point the effect of the initial cloud concentration is small, as indicated above. Furthermore, at such locations the dilution effect may be compensated by the fact that the cloud from the 2-megaton explosion will probably rise higher, thus increasing the distances at which particles from the same relative position in the cloud will reach the ground.

"9.77 As stated in 9.65, the effective wind speed and direction are the mean values from the ground up to a certain level in the radioactive cloud, depending on the total yield of the explosion. As a very rough approximation, the atmospheric layers over which the wind is to be averaged as a function of the weapon yield, are as follows:

Total yield	Layer
Less than 1 MT	Surface to 40,000 feet
1 MT to 5 MT	Surface to 60,000 feet
More than 5 MT	Surface to 80,000 feet

These values should be adequate for the rough evaluation of hypothetical fallout situations based on the idealized patterns. More elaborate prediction schemes take into consideration the winds at different levels instead of a single average effective wind.

"9.78 If there is no directional wind shear, then doubling the wind speed would cause the particles of a given size to reach the ground at twice the distance from ground zero, so that they are spread over roughly twice the area. Based on this conclusion the following scaling laws may be used in connection with the idealized fallout pattern: (a) the unit-time reference dose-rate value for each contour in the 15-mile-per-hour wind velocity pattern in Fig. 9.73 is multiplied by $15/v$ where v is the actual effective wind velocity in miles per hour and (b) the downwind distances in Fig. 9.73 are multiplied by $v/15$. For a 30-mile-per-hour wind, for example, the contour values would be halved and the distances doubled.

"9.79 It will be apparent that in scaling for either yield or wind speed the values of the dose-rate contours are changed. The scaled downwind extent for any given

contour value may readily be obtained by plotting the scaled dose rates versus the scaled downwind distances on logarithmic graph paper and reading downwind distances corresponding to the desired contour value from the resulting smooth curve.

"Both the idealized 15-mile-per-hour pattern in Fig. 9.73 and the wind scaling procedure tend to maximize the downwind extent of the dose-rate contours since they involve the postulate that there is very little (or no) wind shear. This is not an unreasonable assumption for the continental United States, since the wind shear is generally small at altitudes of interest from the standpoint of fallout. If there is considerable wind shear, e.g., 20° or more in the lower half of the mushroom head, the fallout pattern would be wider and shorter than that based on Fig. 9.73. The actual unit-time reference dose rate at a specified downwind distance from ground zero for a given effective wind speed would then be smaller than predicted. The crosswind values at certain distances might, however, be increased.

"It may be noted that the method for wind scaling described in 9.78 may be approximated by another procedure; the reference dose-rate contour values are left unchanged but the distances in Fig. 9.73 are multiplied by $(v/15)^{1/2}$. If considerable wind shear exists, a better approximation may be obtained by using the factor $(v/15)^{1/3}$. The results of this approximation are not reliable for dose rates greater than about 1,000 roentgens per hour for reasons similar to those given in 9.75."

The ENW model described above differs in a number of ways with a more comprehensive and detailed model developed by Pugh and Galiano¹ and subsequently modified by Pugh in 1961 in conjunction with a Fallout Subcommittee of the Advisory Committee on Civil Defense, National Academy of Sciences, for use by the National Resources Evaluation Center.² A tabulation of the WSEG-NAS model results for a number of yields and winds of interest is presented in Appendix D.

¹WSEG Research Memorandum No. 10, An Analytic Model of Close in Deposition of Fallout for Use in Operational-Type Studies, George E. Pugh, Robert J. Galiano, October 1959.

²Ferber, Gilbert J. and Heffter, J. L., A Comparison of Fallout Model Predictions with a Consideration of Wind Effects, p. 122, et seq., AEC TID-7632.

One difference between the ENW and WSEG-NAS models is that the maximum H+1-hour dose rate in the WSEG-NAS model is not limited to 10,000 r/hr at 1 hr. For example, the WSEG-NAS model indicates an H+1-hour contour of 30,000 r/hr at 1 hr. over a 742 square mile area for a 100-MT 100 percent fission surfaceburst, a 10-knot wind, and an effective fallout shear of 0.1 knot per 1000-foot altitude.

H. METEOROLOGICAL DATA FOR USE WITH FALLOUT PREDICTION MODELS

The principal information needed to apply the models described above to determine the fallout at any designated point is:

- The yield, fission yield, and burst points of the weapons contributing fallout to that point,
- The effective wind speed and direction (and for the WSEG-NAS model, the effective fallout shear) at the points of detonation of the weapons contributing fallout to that point.

The wind speed and direction could, of course, be almost anything. There are, however, seasonal regularities in wind conditions at given places throughout the country. These are described in some detail in Chapter 5 of DOD-OCD Federal Civil Defense Guide.¹ The most important data and discussion are reproduced in Table 11 and in the following paragraph:

"Daily Variability

It should be noted that the data in Table XI, this report, and Figures 9 through 13 represent mean or averaged data, based upon five years of upper air observations. On any one day, the actual direction and speed may vary considerably from the seasonal or annual mean. Table II shows the ratios of the vector standard deviations to the average wind speeds for winter and summer and the range of the mean seasonal direction in degrees for each of the 52 rawin locations. The former tabulations indicate the ratio of the scatter to the scalar magnitude of the vector and thus,

¹DOD-OCD, Federal Civil Defense Guide, Part E, Chapter 5, Appendix 6, Application of Meteorological Data to RADEF, December 15, 1963.

Table 11. CLIMATOLOGICAL MEAN WIND DIRECTION (D) AND AVERAGE SPEED (S) IN KNOTS IN THE LAYER FROM 80,000 FT. ALTITUDE TO SURFACE OF THE EARTH AND VECTOR STANDARD DEVIATION (V)

Location	Spring			Summer			Fall			Winter			Annual	
	S	D	V	S	D	V	S	D	V	S	D	V	D	S
Albany	276	02.9	00.3	277	18.7	07.3	275	08.8	07.6	044	02.2	09.3	279	6
Albuquerque	082	24.9	19.4	335	03.6	13.2	095	17.1	19.5	092	20.9	22.3	087	18
Anchorage	056	05.8	19.4	649	03.7	17.0	053	18.3	20.4	080	17.7	20.2	064	10
Annette	077	12.9	22.4	090	05.0	18.9	076	22.0	21.7	090	24.0	23.5	084	16
Big Spring	070	30.7	10.7	204	05.3	13.8	093	15.5	20.0	084	35.6	21.2	084	19
Blomark	097	17.1	20.0	085	16.0	15.1	007	23.9	20.5	109	27.8	23.5	095	21
Boise	096	16.6	20.0	062	15.7	14.0	097	19.4	20.7	102	25.9	22.3	092	19
Brownsville	078	24.4	15.4	275	12.0	10.7	088	08.2	17.7	077	29.5	16.5	075	13
Buffalo	098	26.3	23.1	107	16.0	16.5	003	20.8	22.4	539	37.4	23.7	092	27
Burrwood	007	20.1	10.7	261	09.5	11.8	000	14.0	19.4	003	37.0	17.0	006	19
Caribou	009	19.0	22.7	093	16.4	18.7	003	29.9	23.3	001	29.7	24.7	004	03
Charleston	092	29.9	22.3	229	03.6	13.0	079	19.0	21.0	008	42.4	19.4	099	22
Columbia	007	20.2	22.6	099	08.4	13.4	096	23.8	21.3	091	30.5	25.3	092	24
Dayton	092	20.7	23.5	115	11.5	14.9	009	24.9	20.9	090	41.5	26.7	092	26
Denver	099	20.7	23.2	073	10.0	13.5	103	18.8	19.7	104	26.0	22.2	097	19
Dodge City	003	25.7	20.4	072	06.7	13.1	094	20.0	20.7	093	32.2	23.2	090	20
Edmonton	099	12.0	17.0	076	09.5	15.3	102	23.0	10.5	109	27.1	10.2	100	17
Ely	095	17.7	20.0	052	12.9	13.0	092	16.9	19.0	102	24.0	23.2	099	17
Fairbanks	007	05.0	10.2	060	04.0	14.0	061	15.3	10.4	005	19.7	25.5	072	11
Fort Worth	002	31.5	20.4	282	03.7	13.2	099	16.5	20.7	065	37.0	22.3	007	27
Glenn Falls	095	10.3	12.2	050	16.2	15.2	102	24.1	29.2	104	30.0	27.4	094	24
Green Bay	096	21.7	21.5	105	17.9	16.1	097	26.2	22.1	090	32.4	23.2	099	24
Greensboro	092	30.2	22.8	137	05.0	10.5	001	22.3	21.5	097	43.4	21.2	097	25
Honolulu	094	29.0	24.4	104	13.6	16.7	001	29.0	24.2	009	42.7	29.2	090	24
International Falls	099	16.3	23.2	090	17.0	16.5	106	24.0	21.4	107	27.9	21.2	1.4	27
Jacksonville	094	27.7	20.0	253	06.5	12.2	003	16.5	20.7	000	39.0	10.2	097	27
Lake Charles	003	29.6	19.0	263	08.2	12.1	094	15.3	19.8	002	30.0	19.3	005	13
Lincoln	093	15.0	15.0	289	04.5	09.0	123	01.0	12.0	106	15.1	16.9	100	27
Little Rock	065	21.1	21.0	212	01.9	13.2	090	19.7	20.8	005	40.5	23.2	094	22
Long Beach	093	20.7	20.4	029	07.0	13.2	002	12.7	17.1	101	22.2	23.3	092	18
Montreal	097	20.5	22.7	100	16.2	17.0	005	27.3	23.0	009	30.0	22.2	090	23
Needham	100	10.0	21.2	064	12.0	10.0	032	17.0	22.2	099	26.3	24.2	102	19
Niamey	097	21.0	17.2	267	12.0	13.7	000	06.9	10.4	000	29.9	17.2	092	17
Montgomery	092	30.7	22.5	246	05.4	13.4	007	10.5	21.5	006	42.2	21.4	097	27
Nt. Clonans	009	26.2	24.0	109	16.2	16.4	000	26.9	22.3	090	37.0	24.7	103	20
Nantucket	090	29.3	24.3	097	10.6	17.9	077	30.3	23.6	095	42.6	26.2	091	26
Nashville	000	31.2	22.7	146	03.7	13.3	000	22.0	21.2	094	49.7	22.4	10.0	20
Nona	002	05.7	10.0	040	03.2	17.3	026	11.1	19.5	001	17.4	25.7	060	4
Norfolk	095	31.3	23.0	120	06.0	15.7	079	23.9	22.9	009	44.9	22.2	104	18
Oakland	104	19.5	21.5	002	11.2	15.1	093	14.0	20.7	105	25.1	25.6	104	17
Omaha	009	24.2	22.0	009	11.0	13.9	100	24.2	21.2	090	32.3	22.9	101	17
Pittsburgh	003	29.5	23.7	110	13.1	15.0	003	27.3	22.2	009	43.0	23.4	092	26
Renton	092	20.2	23.5	110	11.9	14.0	095	25.3	21.4	001	39.0	24.3	096	27
Reno	094	26.0	24.2	104	17.0	16.1	001	29.2	23.7	009	37.5	24.4	101	19
San Juan	105	10.5	12.7	276	13.4	09.0	250	05.7	13.1	114	11.0	13.6	102	12
Seattle	093	16.0	21.0	070	11.0	10.0	091	21.4	21.0	097	25.7	24.0	092	18
Sault Ste. Marie	090	19.0	22.2	110	17.7	17.0	095	25.3	22.9	090	30.4	23.5	101	17
St. Cloud	095	10.9	21.0	095	17.7	16.0	103	25.2	21.3	103	29.1	22.2	101	17
Tucson	001	26.7	20.3	349	05.1	14.4	005	14.4	10.6	000	27.4	22.7	104	18
Washington	094	30.5	24.1	172	12.5	16.5	000	20.7	22.9	099	44.7	24.2	104	18
Winterson	000	00.7	19.7	071	32.9	19.1	000	17.0	19.5	007	21.3	23.5	101	17

are a measure of the reliability of the mean as a prediction. The mean data in Table I are more representative of the winds on any particular day where the ratio of V/S has a low value. For example, the mean data for Washington in winter (089 degrees, 45 knots) has a V/S value of .55 whereas the summer mean data (112 degrees, 10 knots) has a V/S value of 1.57. Therefore, the mean winter data for Washington are more representative of the winds on any one day during the winter than the mean summer data are representative of the winds on any one summer day. Further, at Ft. Worth in summer when V/S equals 3.56 the mean summer data (282 degrees, 4 knots) would not be a very reliable prediction for the winds on any one summer day."

I. DOSES AND DOSE RATES IN OVERLAPPING FALLOUT PATTERNS

Since no attempt has been made to estimate the possible level of attack on military targets, or the distribution of such an attack throughout the United States, it is not possible to give an example of the integrated fallout pattern throughout this country for even one set of wind conditions. What will be considered instead is an estimate of the maximum level of fallout which might reasonably be anticipated in and around a reasonably large populated area subjected to a direct attack. Specifically, it will be assumed that 3 10-MT, 50 percent fission yield weapons have been surfaceburst in such a way that the 5 psi circles are just tangent to each other. The wind speed selected is 10 knots -- the average for the Washington, D.C. area in the summer (see Table 11). The model used will be the WSEG-NAS model, the effective wind shear 0.1 kt/1000-foot altitude. One wishes to examine how the H+1-hour contour levels, and the first week dose (maximum biological dose) contour levels can overlap under these conditions. The individual patterns, with overlap indicated, are plotted in Figures 22 and 23.

It may be seen from Figure 22 that most of the area covered by the 5 psi blast level has a contamination level of at least 1500 r/hr at 1 hr. About half the total 5 psi area and somewhat more of the downwind area outside the 5 psi circles are

contaminated to a level of at least 5000 r/hr at 1 hr. Significant areas within the 5 psi blast level and downwind of it are contaminated to levels in the range of 5000 to 10,000 r/hr at 1 hr. The highest levels indicated by the patterns are about 13,000 r/hr at 1 hr. Very extensive areas downwind are overlapped by all 3 patterns, for a total contamination level of at least 4500 r/hr at 1 hr.

From Figure 23, it is seen that a maximum biological dose (approximately equal to the total dose during the first week) through most of the 5 psi area is at least 5000 r, that it is about 15,000 r over significant positions of the blast area and beyond, and that it reaches about 26,000 r in the area of greatest intensity.

These results are for a fission yield of 50 percent. They should be increased by 1/3 if the fission yield is increased from 1/2 to 2/3. They would increase if the effective wind were less than 10 knots, or if there were heavy fallout from other targets. They would decrease if the effective wind were greater than 10 knots, or if the fission yield were less than 50 percent. They would disappear altogether if the weapons were airburst.

One cannot draw reliable general conclusions as to the level of fallout contamination against which protection should be sought in and around all urban areas by a single illustrative example using one of several fallout models, and considering only an area subject to heavy attack. For fallout, as with blast and heat, each area requires special study, and each area must be considered in light of many postulated attacks on the country as a whole. The data and methods described in this paper show one way of making such a study, provided additional assumptions are made as to the weight and distribution of attacks on military targets.

There is, perhaps, one tentative conclusion of some importance which follows from the WSEG-NAS model. Namely, that in areas in and around a target subjected to multiple attack with high-yield surfaceburst weapons, contamination levels in the range of 5000 to 10,000 r/hr at 1 hr, and first-week doses in the range of 15,000 r to 30,000 r are not unreasonable fallout levels to consider -- along with other factors such as cost -- in the design of shelters and in planning recovery operations.

Appendix A

DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION

Table 1. POPULATION, LAND AREAS, AND DENSITIES OF U.S. URBANIZED AREAS (1960 CENSUS)

(213 Urbanized Areas, See Table 5 for Rank According to Population)

URBANIZED AREA	POPULATION (Persons)	AREA (sq. mi.)	DENSITY (persons/sq. mi.)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION																	
				1000- 1500- 2000- 2500- 3000- 4000- 5000- 6,000- 10,000- 15,000- 20,000- 25,000																	
				1000- 1500- 2000- 2500- 3000- 4000- 5000- 6,000- 10,000- 15,000- 20,000- 25,000																	
<u>College, Tex.</u>	91,566	63.8	1,435	1.3	62.5																
Abilene	90,368	62.5	1,446																		
In Urban Fringe	1,198	1.3	922																		
<u>Dearborn, Mich.</u>	450,293	181.3	2,483			87.6				53.9											
Dearborn	290,151	51.9	5,387																		
In Urban Fringe	167,922	87.6	1,921																		
<u>Albany, Ga.</u>	50,353	24.6	2,042			1.4	23.0														
Albany	55,890	23.0	2,430																		
In Urban Fringe	2,463	1.6	1,759																		
<u>Albany-Schenectady-Troy, N.Y.</u>	455,407	106.4	4,281				67.8			28.6											
In Central Cities	278,900	30.6	7,225																		
Albany	128,726	19.0	6,828																		
Schenectady	81,682	10.1	7,933																		
Troy	67,892	9.3	7,257																		
In Urban Fringe	176,547	67.8	2,604																		
<u>Albuquerque, N.M.</u>	241,216	70.0	3,446			19.0	56.2														
Albuquerque	291,189	56.2	5,183																		
In Urban Fringe	40,027	19.8	2,222																		
<u>Allentown-Bethlehem, Pa.</u>	296,316	60.1	4,930					42.5		17.6											
In Central Cities	103,755	36.6	5,321																		
Allentown	108,747	17.6	6,156																		
Bethlehem	75,408	19.9	3,969																		
In Urban Fringe	72,261	23.5	3,075																		
<u>Allentown, Pa.</u>	83,358	18.0	4,631			9.0				9.0											
Allentown	69,407	9.0	7,712																		
In Urban Fringe	13,951	9.0	1,517																		
<u>Amerville, Tex.</u>	137,969	54.8	2,518				54.8														
Amerville	137,969	54.8	2,518																		
In Urban Fringe	---	---	---																		
<u>Ann Arbor, Mich.</u>	115,282	27.9	4,132				14.2	13.7													
Ann Arbor	67,380	13.7	4,915																		
In Urban Fringe	47,902	14.2	3,378																		
<u>Asheville, N.C.</u>	88,502	32.3	2,740			8.3	24.0														
Asheville	88,192	24.0	3,675																		
In Urban Fringe	6,400	8.3	1,012																		
<u>Atlanta, Ga.</u>	708,125	245.8	2,877				17.6	28.2													
Atlanta	467,435	128.2	3,642																		
In Urban Fringe	240,690	117.6	2,047																		
<u>Atlantic City, N.J.</u>	124,902	60.9	2,032			88.5				15.9											
Atlantic City	59,548	11.5	5,178																		
In Urban Fringe	65,354	49.4	1,348																		
<u>Augusta, Ga.-S.C.</u>	123,698	43.1	2,870				28.1			19.0											
Augusta	70,626	18.9	3,738																		
In Urban Fringe	53,072	28.1	1,699																		
<u>Aurora, Ill.</u>	85,922	23.8	3,610				9.8			10.0											
Aurora	63,715	10.8	5,900																		
In Urban Fringe	21,907	9.0	2,225																		
<u>Austin, Tex.</u>	167,167	50.7	3,297	1.3						49.8											
Austin	166,545	49.4	3,376																		
In Urban Fringe	612	1.3	471																		
<u>Bakersfield, Cal.</u>	141,763	38.4	3,701							39.3											
Bakersfield	56,048	16.0	3,553																		
In Urban Fringe	84,915	22.3	3,208																		
<u>Baltimore, Md.</u>	1,418,948	220.3	6,441							141.3											
Baltimore	919,078	79.0	11,636																		
In Urban Fringe	479,928	161.3	2,996																		
<u>Baton Rouge, La.</u>	191,485	56.8	3,371							29.8											
Baton Rouge	152,619	31.0	4,917																		
In Urban Fringe	41,766	25.8	1,597																		

Table 1. (Continued)

URBANIZED AREA	POPULATION (Persons)	AREA (mi ²)	DENSITY (persons/ mi)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION												
				1000-	1000-	1500-	2000-	2500-	3000-	4000-	5000-	6000-	10,000-	15,000-	20,000-	
<u>Bay City, Mich.</u>	72,763	23.0	3,164		13.4					9.6						
Bay City	53,604	9.6	5,584													
In Urban Fringe	19,159	13.4	1,420													
<u>Beaumont, Tex.</u>	119,178	73.3	1,626	2.5		70.0										
Beaumont	119,178	73.6	1,603													
In Urban Fringe	3	2.5	1													
<u>Billings, Mont.</u>	68,712	15.5	3,917		6.2					9.3						
Billings	52,951	9.3	5,683													
In Urban Fringe	7,061	3.2	1,268													
<u>Binghamton, N.Y.</u>	158,141	31.0	5,101						29.1	10.9						
Binghamton	79,941	18.9	4,247													
In Urban Fringe	62,200	20.1	3,090													
<u>Birmingham, Ala.</u>	521,320	156.8	3,325				82.3			74.5						
Birmingham	340,887	74.5	4,576													
In Urban Fringe	180,443	82.3	2,193													
<u>Boston, Mass.</u>	2,412,236	515.8	4,679					468.0						47.8		
Boston	697,197	47.8	14,586													
In Urban Fringe	1,716,039	468.0	3,667													
<u>Bridgesport, Conn.</u>	365,654	171.3	2,140		153.4						17.9					
Bridgesport	134,769	17.9	7,557													
In Urban Fringe	209,968	153.4	1,368													
<u>Brockton, Mass.</u>	111,316	40.8	2,728			19.3		21.5								
Brockton	72,873	21.5	3,387													
In Urban Fringe	38,502	19.3	1,995													
<u>Buffalo, N.Y.</u>	1,054,370	143.2	6,582					120.8						79.4		
In Central Cities	532,759	39.4	13,522													
Buffalo	532,759	39.4	13,522													
Niagara Falls	(5)	-	-													
In Urban Fringe	521,611	120.8	4,370													
<u>Canton, Ohio</u>	213,576	50.7	4,213				36.4			14.3						
Canton	113,631	14.3	7,946													
In Urban Fringe	99,945	36.4	2,748													
<u>Cedar Rapids, Iowa</u>	185,118	46.8	2,602			7.4	33.0									
Cedar Rapids	92,825	33.0	2,789													
In Urban Fringe	13,683	7.4	1,768													
<u>Champaign-Urbana, Ill.</u>	78,014	12.4	6,291		1.0			3.0	6.4							
In Central Cities	76,877	11.4	6,744													
Champaign	49,583	6.4	7,747													
Urbana	27,294	5.0	5,656													
In Urban Fringe	1,137	1.0	1,137													
<u>Charleston, S.C.</u>	168,113	32.8	5,198					25.7						5.1		
Charleston	85,928	5.1	12,928													
In Urban Fringe	94,185	25.7	3,685													
<u>Charleston, N.Ya.</u>	169,598	55.9	3,032					95.9								
Charleston	89,798	28.4	3,021													
In Urban Fringe	83,798	27.5	3,044													
<u>Charlotte, N.C.</u>	289,551	73.9	2,826	3.1				64.8								
Charlotte	201,564	64.8	2,111													
In Urban Fringe	7,987	9.1	879													
<u>Chattanooga, Tenn.</u>	295,143	89.1	2,302		52.4			38.7								
Chattanooga	170,009	38.7	3,542													
In Urban Fringe	75,124	52.4	1,034													
<u>Chicago, Ill. (North-</u>																
western) Ind.	5,659,213	959.8	6,209					659.0	76.8					226.2		
In Central Cities	3,099,891	305.8	12,959													
Chicago	3,559,404	224.2	15,436													
Gary	179,320	41.6	4,287													
Hammond	111,690	23.9	4,753													
East Chicago	57,469	11.8	5,015													
In Urban Fringe	2,061,122	659.0	1,128													
<u>Cincinnati, Ohio</u>	992,568	242.3	4,101			165.0				77.3						
Cincinnati	582,510	77.3	6,501													
In Urban Fringe	411,018	165.0	2,977													

Table 1. (Continued)

URBANIZED AREA	POPULATION (Persons)	AREA (sq. mi.)	DENSITY (persons/ sq. mi.)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION										
				1000- 1500	1500- 2000	2000- 3000	3000- 4000	4000- 5000	5000- 8,000	8,000- 10,000	10,000- 15,000	15,000- 20,000	20,000- 25,000	
<u>Cincinnati, Ohio</u>	1,784,991	555.7	3,042		905.6							81.2		
Cleveland	876,050	81.2	10,789											
In Urban Fringe	968,541	505.5	1,792											
<u>Colorado Springs, Col.</u>	169,220	79.3	1,420			12.6		76.7						
Colorado Springs	78,194	16.7	4,203											
In Urban Fringe	38,026	12.6	2,383											
<u>Columbia, S.C.</u>	182,681	92.3	1,969			33.9		10.4						
Columbia	97,832	10.4	5,295											
In Urban Fringe	65,168	33.9	1,922											
<u>Columbus, Ga./Ohio</u>	168,382	53.0	2,994			27.4		26.4						
Columbus	116,779	26.4	4,423											
In Urban Fringe	41,603	27.4	1,510											
<u>Columbus, Ohio</u>	616,743	164.8	4,259			55.8		69.0						
Columbus	471,316	59.0	5,296											
In Urban Fringe	145,427	55.8	2,606											
<u>Copperas Cove, Tex.</u>	177,388	53.1	3,340	15.1				37.8						
Copperas Cove	167,690	37.8	4,435											
In Urban Fringe	9,698	15.1	633											
<u>Dallas, Tex.</u>	932,349	647.0	1,441	367.1		279.9								
Dallas	879,384	279.9	2,420											
In Urban Fringe	292,655	267.1	660											
<u>Dayton, Ohio</u>	227,176	95.9	2,369	29.0	46.7			20.1						
In Central Cities	193,540	26.8	2,768											
Dayton	60,901	44.7	1,365											
West Island	51,843	10.9	4,758											
Mehlman	42,705	9.2	4,642											
In Urban Fringe	43,627	29.1	1,499											
<u>Dayton, Ohio</u>	581,644	120.5	4,829			70.5		33.0						
Dayton	262,222	33.6	7,808											
In Urban Fringe	239,322	90.9	2,633											
<u>Decatur, Ill.</u>	67,516	27.6	2,240	7.9				10.7						
Decatur	78,004	19.7	3,960											
In Urban Fringe	11,512	7.9	1,657											
<u>Denver, Col.</u>	633,624	166.9	4,024				95.6	71.0						
Denver	693,687	71.0	6,956											
In Urban Fringe	387,737	95.6	3,240											
<u>Des Moines, Iowa</u>	241,715	97.0	2,486	12.5				64.5						
Des Moines	290,882	64.5	3,240											
In Urban Fringe	32,133	32.5	9,989											
<u>Detroit, Mich.</u>	3,537,769	731.9	4,834				592.3				139.6			
In Central Cities	1,678,168	129.6	11,968											
Detroit	1,670,160	130.6	11,968											
Eastland	(8)	-	-											
In Urban Fringe	1,867,565	592.3	3,133											
<u>DeWitt, Iowa/Ill.</u>	53,447	15.8	3,762	2.2				13.6						
DeWitt	94,606	13.6	4,162											
In Urban Fringe	2,041	2.2	1,291											
<u>Duluth, Minn./Superior, Wis.</u>	144,763	104.4	1,387	41.8		62.6								
In Central Cities	149,437	99.9	1,496											
Duluth	169,864	62.6	1,797											
Superior	33,983	37.3	900											
In Urban Fringe	4,316	4.5	959											
<u>Durham, N.C.</u>	84,842	27.0	3,135	9.0				22.0						
Durham	78,302	22.0	3,599											
In Urban Fringe	4,340	5.0	1,266											
<u>El Paso, Tex.</u>	277,128	115.0	2,410	0.6		110.6								
El Paso	276,687	114.8	2,410											
In Urban Fringe	441	0.2	1,183											
<u> Erie, Pa.</u>	177,433	69.7	2,179	37.9				16.8						
Erie	129,443	18.8	7,364											
In Urban Fringe	28,990	37.9	1,027											

Table 1. (Continued)

ORGANIZED AREA	POPULATION (Persons)	AREA (mi ²)	DENSITY (persons/ mi)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION																
				1000-	1500-	2000-	2500-	3000-	3500-	4000-	4500-	5000-	5500-	6000-						
				1800	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000						
<u>Logans, Ore.</u>	95,688	38.2	2,505			23.7			16.5											
Logans	50,977	14.5	3,516																	
In Urban Fringe	64,709	23.7	1,886																	
<u>Louisville, Ind.</u>	143,640	24.1	4,213		2.1					32.0										
Louisville	161,543	32.0	2,423																	
In Urban Fringe	2,117	2.1	1,028																	
<u>Fall River, Mass./R.I.</u>	123,951	47.6	2,604			13.7	33.9													
Fall River	99,942	33.9	2,948																	
In Urban Fringe	24,609	13.7	1,752																	
<u>Fargo, N.D./Nebr.- S.D. Area</u>	72,730	28.2	3,600		5.1				6.1	9.0										
In Central Cities	69,596	15.1	4,629																	
Fargo	46,662	9.0	5,185																	
Neighborhood	22,934	6.1	2,760																	
In Urban Fringe	3,134	5.1	615																	
<u>Fitchburg, Mass./Vt.</u>	72,307	57.7	1,254		29.5			28.2												
In Central Cities	70,956	56.9	1,247																	
Fitchburg	43,421	27.4	1,570																	
Keene/Vt.	27,929	29.5	947																	
In Urban Fringe	1,397	0.8	1,746																	
<u>Flint, Mich.</u>	277,788	75.2	3,694			45.3						29.9								
Flint	198,940	29.9	6,587																	
In Urban Fringe	88,848	45.3	1,785																	
<u>Ft. Lauderdale, Bolly- wood, Fla.</u>	319,951	123.9	2,582			17.9	84.5	21.5												
In Central Cities	118,885	39.4	3,217																	
Ft. Lauderdale	87,448	21.5	3,491																	
Bollywood	31,237	17.9	1,949																	
In Urban Fringe	201,066	84.5	2,379																	
<u>Ft. Smith, Ark./Ohio</u>	61,440	29.3	2,104			4.6	24.7													
Ft. Smith	52,991	24.7	2,185																	
In Urban Fringe	8,449	4.6	1,880																	
<u>Ft. Wayne, Ind.</u>	179,571	48.6	3,695				11.8			36.8										
Ft. Wayne	161,776	36.8	4,326																	
In Urban Fringe	17,795	11.8	1,538																	
<u>Ft. Worth, Tex.</u>	502,682	272.6	1,844		132.1			140.5												
Ft. Worth	354,260	140.5	2,536																	
In Urban Fringe	146,418	132.1	1,108																	
<u>Fresno, Cal.</u>	213,444	68.6	3,572					32.0		28.6										
Fresno	133,920	28.6	4,683																	
In Urban Fringe	79,515	32.0	2,485																	
<u>Gadsden, Ala.</u>	68,944	37.0	1,847		16.3			38.7												
Gadsden	58,888	35.7	1,892																	
In Urban Fringe	10,056	15.3	640																	
<u>Galveston, Texas City, Tex.</u>	118,482	153.3	773		153.3															
In Central Cities	99,240	129.2	768																	
Galveston	67,175	54.2	790																	
Texas City	32,065	45.0	713																	
In Urban Fringe	19,742	24.1	798																	
<u>Grand Rapids, Mich.</u>	294,230	91.2	3,226				68.8			24.8										
Grand Rapids	177,313	24.4	7,267																	
In Urban Fringe	116,917	68.8	1,750																	
<u>Great Falls, Mont.</u>	57,629	12.9	4,467					1.5		11.6										
Great Falls	55,357	11.4	4,856																	
In Urban Fringe	2,272	1.5	1,515																	
<u>Green Bay, Wis.</u>	97,162	46.6	2,085			29.8			16.8											
Green Bay	67,888	16.8	3,743																	
In Urban Fringe	34,274	29.8	1,158																	
<u>Greensboro, N.C.</u>	123,334	59.8	2,428					2.2	48.6											
Greensboro	119,574	48.6	2,463																	
In Urban Fringe	3,760	2.2	1,115																	

Table 1. (Continued)

DESIGNATED AREA	POPULATION (Persons)	Area (mi ²)	DENSITY (persons/ mi)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION													
				1000	1000-	1500-	2000-	3000-	4000-	5000-	6000-	10,000-	15,000-	20,000-	25,000-		
<u>Greenville, S.C.</u>	126,037	52.6	2,412				32.6										
Greenville	66,188	24.3	2,724														
In Urban Fringe	60,849	28.3	2,145														
<u>Hamilton, Ohio</u>	89,778	34.1	2,633	21.9						12.2							
Hamilton	72,354	12.2	5,931														
In Urban Fringe	17,424	21.9	795														
<u>Hamilton, San Antonio, Tex.</u>	61,030	57.1	1,227	16.4	31.9		5.7										
In Central Cities	57,622	36.7	1,575														
Hamilton	41,227	51.8	1,329														
San Antonio	16,392	5.7	2,831														
In Urban Fringe	4,629	14.4	280														
<u>Harrisburg, Pa.</u>	299,561	48.2	4,348					50.6						7.6			
Harrisburg	79,697	7.6	10,486														
In Urban Fringe	120,864	40.6	1,197														
<u>Hartford, Conn.</u>	261,619	121.2	2,909			113.8								17.4			
Hartford	182,178	17.6	6,371														
In Urban Fringe	219,441	113.8	1,928														
<u>High Point, N.C.</u>	96,543	37.7	1,975		3.6		29.3										
High Point	82,263	20.2	2,048														
In Urban Fringe	6,480	3.6	1,316														
<u>Memphis, Tenn.</u>	231,335	99.8	3,320					99.8									
Memphis	224,126	82.9	1,375														
In Urban Fringe	17,162	15.9	1,594														
<u>London, Ind.</u>	1,129,679	420.5	2,647			102.6	328.1										
London	926,219	228.1	2,060														
In Urban Fringe	201,659	192.4	1,957														
<u>Washington, Arlington, Washington, D.C.</u>	193,732	42.2	3,522					34.2						6.0			
In Central Cities	118,918	22.0	5,223														
Washington	62,627	8.0	19,452														
Arlington	24,283	18.0	2,235														
In Urban Fringe	60,622	28.2	2,516														
<u>Wheaton, Ill.</u>	74,970	53.2	1,400		53.2												
Wheaton	72,285	50.7	1,427														
In Urban Fringe	2,685	2.5	1,042														
<u>Indianapolis, Ind.</u>	639,349	144.9	4,412					33.7						71.2			
Indianapolis	476,222	71.2	6,659														
In Urban Fringe	163,127	73.7	2,213														
<u>Jackson, Miss.</u>	71,412	22.1	3,237			11.6				10.3							
Jackson	59,728	10.5	4,030														
In Urban Fringe	28,685	11.6	1,708														
<u>Jackson, Miss.</u>	147,439	49.7	2,937	3.2						28.6							
Jackson	143,422	46.8	3,105														
In Urban Fringe	3,017	2.7	935														
<u>Jacksonville, Fla.</u>	372,549	711.4	3,344					81.2									
Jacksonville	291,938	38.2	6,357														
In Urban Fringe	171,523	87.2	2,173														
<u>Jacksonville, Fla.</u>	98,474	21.0	4,690					18.0						3.6			
Jacksonville	23,949	5.4	2,628														
In Urban Fringe	22,529	15.4	2,767														
<u>Joliet, Ill.</u>	116,893	28.9	3,159					22.7		14.2							
Joliet	86,760	14.2	4,793														
In Urban Fringe	49,633	22.7	2,124														
<u>Kalamazoo, Mich.</u>	119	62.1	2,747			18.0				24.1							
Kalamazoo	82,289	20.1	3,468														
In Urban Fringe	33,579	18.0	1,935														
<u>Kansas City, Mo. (Cont.)</u>	923,181	282.4	3,262					132.6	137.6								
Kansas City	475,833	129.8	2,654														
In Urban Fringe	447,348	152.6	2,928														
<u>Kansas City, Mo.</u>	72,882	13.2	5,519											18.1			
Kansas City	67,993	19.1	4,723														
In Urban Fringe	4,889	2.1	1,555														

Table 1. (Continued)

ORGANIZED AREA	POPULATION (Persons)	AREA (mi ²)	DENSITY (persons/ mi)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION													
				1000-	1500-	2000-	2500-	3000-	3500-	4000-	5000-	10,000-	15,000-	20,000-	25,000-		
				1000	1500	2000	2500	3000	3500	4000	5000	10,000	15,000	20,000	25,000		
<u>Massachusetts, Towns</u>	178,729	69.7	2,563			34.3				28.4							
Seymour	111,027	28.4	4,433														
In Urban Fringe	63,807	34.3	1,776														
<u>Mississippi, Co.</u>	89,118	24.8	35,893						29.8								
Lata Charles	63,242	16.2	3,889														
In Urban Fringe	23,777	9.4	3,074														
<u>Massachusetts, Pa.</u>	93,065	29.2	3,214		21.9								7.3				
Lancaster	61,049	7.3	8,384														
In Urban Fringe	22,000	21.9	1,460														
<u>Massachusetts, Towns</u>	169,328	47.2	3,587				28.8			21.2							
Lancaster	167,087	21.2	5,085														
In Urban Fringe	61,810	28.8	2,348														
<u>Massachusetts, Towns</u>	69,878	13.5	4,495							13.8							
Lerds	69,878	13.5	4,495														
<u>Las Vegas, Nev.</u>	89,027	34.3	2,487				34.4										
Las Vegas	64,065	24.7	2,607														
In Urban Fringe	23,622	9.6	2,606														
<u>Lawrence, Mass./</u> <u>Massachusetts, Towns</u>	164,125	78.4	2,355		32.0	37.1							7.2				
In Central Cities	117,279	39.2	2,992														
Lawrence	79,923	7.2	9,852														
Maverick	48,343	12.0	1,448														
In Urban Fringe	40,866	31.3	1,561														
<u>Lawrence, Mass.</u>	61,941	13.2	4,693	1.2								12.0					
Lawrence	61,941	12.0	5,141														
In Urban Fringe	264	1.2	203														
<u>Louisiana, Bayou, La.</u>	65,233	95.9	680	69.9	35.0												
In Central Cities	65,233	95.9	680														
Lafayette	60,824	25.0	1,165														
Bayou	24,649	69.0	481														
<u>Lexington, Ky.</u>	111,942	37.2	4,118					14.2	12.0								
Lexington	62,618	13.9	4,812														
In Urban Fringe	49,126	14.2	3,648														
<u>Lima, Ohio</u>	82,962	13.1	4,806				4.8		8.3								
Lima	81,837	8.3	4,169														
In Urban Fringe	11,826	4.8	2,489														
<u>Lincoln, Neb.</u>	136,228	35.0	3,692	9.6						25.6							
Lincoln	129,821	23.4	5,040														
In Urban Fringe	7,659	9.6	882														
<u>Little Rock, South</u> <u>Arkansas, Towns</u>	165,817	62.2	2,975		14.8		19.4	28.3									
In Central Cities	165,817	62.2	2,441														
Little Rock	107,813	29.2	3,810														
North Little Rock	58,022	19.9	2,916														
In Urban Fringe	19,172	14.8	1,369														
<u>Lorain/Lorain, Ohio</u>	142,898	61.4	1,755	49.1				12.3									
In Central Cities	112,716	32.3	3,490														
Lorain	68,922	18.6	3,820														
Lorain	43,782	14.3	2,642														
In Urban Fringe	29,168	69.1	814														
<u>Los Angeles, Long Beach,</u> <u>Cal.</u>	5,680,791	370.0	4,736					1326.1	48.9								
In Central Cities	2,872,183	522.7	5,438														
Los Angeles	2,472,618	450.8	5,451														
Long Beach	244,163	49.9	7,498														
In Urban Fringe	3,668,465	809.3	4,217														
<u>Louisville, Ky./Ind.</u>	606,639	135.6	4,474			78.5			97.1								
Louisville	598,629	97.1	4,841														
In Urban Fringe	218,629	78.5	2,782														
<u>Lowell, Mass.</u>	119,547	39.0	3,952		76.9					13.1							
Lowell	92,167	13.1	7,831														
In Urban Fringe	29,450	18.9	1,624														

Table 1. (Continued)

ORGANIZED AREA	POPULATION (Persons)	AREA sq. mi.	DENSITY persons per sq. mi.	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION													
				1000-1500	1500-2000	2000-3000	3000-4000	4000-6000	6000-8000	8000-10,000	10,000-15,000	15,000+					
<u>Lubbock, Tex.</u>	129,289	76.2	1,697	1.2	75.0												
Lubbock	125,691	75.0	1,674														
In Urban Fringe	3,598	1.2	2,998														
<u>Lynchburg, Va.</u>	59,319	27.6	2,149	4.6		23.0											
Lynchburg	58,799	23.0	2,557														
In Urban Fringe	4,520	4.6	985														
<u>Macon, Ga.</u>	176,161	33.2	5,303			18.2		15.0									
Macon	69,768	15.0	4,651														
In Urban Fringe	40,197	18.2	2,213														
<u>Madison, Wis.</u>	157,814	54.3	2,904			18.6		15.7									
Madison	126,706	35.7	3,549														
In Urban Fringe	31,108	18.6	1,672														
<u>Manchester, N.H.</u>	91,499	34.6	2,650		2.6		32.0										
Manchester	88,282	32.0	2,769														
In Urban Fringe	3,217	2.6	1,314														
<u>Memphis, Tenn.</u>	544,505	155.7	3,497			27.5		178.2									
Memphis	497,524	128.2	3,844														
In Urban Fringe	46,981	27.5	1,704														
<u>Meriden, Conn.</u>	51,850	23.5	2,208				23.5										
Meriden	51,850	23.5	2,208														
<u>Miami, Fla.</u>	852,705	183.1	4,657					148.9					38.2				
Miami	291,688	38.2	7,629														
In Urban Fringe	561,017	148.9	3,768														
<u>Midland, Tex.</u>	63,274	23.5	2,693		2.6		22.6										
Midland	62,425	22.9	2,735														
In Urban Fringe	849	2.6	1,562														
<u>Minneapolis, Minn.</u>	1,149,997	397.0	2,919		300.9								91.3				
Minneapolis	783,328	91.3	8,537														
In Urban Fringe	409,673	300.9	1,354														
<u>Minneapolis, St. Paul, Minn.</u>	1,377,143	657.3	2,095		548.6								52.2	56.5			
In Central Cities	796,283	108.7	7,326														
Minneapolis	482,872	56.5	8,546														
St. Paul	313,411	52.2	6,204														
In Urban Fringe	500,860	548.6	1,259														
<u>Mobile, Ala.</u>	268,139	171.5	1,563		152.9			18.6									
Mobile	202,779	152.9	1,326														
In Urban Fringe	65,360	18.6	3,514														
<u>Monroe, La.</u>	89,541	40.8	2,194		22.3			18.1									
Monroe	92,219	40.8	2,285														
In Urban Fringe	29,327	22.3	1,327														
<u>Montgomery, Ala.</u>	142,093	79.2	1,805		7.8				31.8								
Montgomery	134,393	79.2	1,704														
In Urban Fringe	7,700	7.8	1,001														
<u>Waco, Tex.</u>	77,508	77.5	1,000			5.3			12.3								
Waco	68,603	77.5	887														
In Urban Fringe	8,905	5.3	1,123														
<u>Washtenaw Heights, Mich.</u>	95,350	24.1	3,956					11.8	9.2	2.1							
In Central Cities	68,537	12.3	5,564														
Washtenaw Heights	48,845	9.2	5,253														
In Urban Fringe	17,552	11.8	1,489														
<u>Nashville, Tenn.</u>	366,729	179.3	2,044			100.3			29.0								
Nashville	170,876	29.0	5,892														
In Urban Fringe	175,853	100.3	1,751														
<u>New Bedford, Mass.</u>	128,657	29.7	4,325					10.5	19.1								
New Bedford	102,477	19.1	5,365														
In Urban Fringe	26,180	10.6	2,441														

Table 1. (Continued)

SPECIALIZED AREA	POPULATION (Persons)	AREA (mi ²)	DENSITY persons/ (mi)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION									
				1000-	1000-	1500-	2000-	3000-	4000-	6000-	8,000-	10,000-	15,000-
				1000	1500	2000	3000	4000	6000	9000	10,000	15,000	20,000
<u>New Britain, Conn.</u>	99,894	22.6	4,420			8.9			12.7				
In Central Cities	82,201	13.7	4,090										
New Britain	82,201	13.7	6,000										
Bristol	(91)	-	-										
In Urban Fringe	17,693	8.9	1,988										
<u>New Haven, Conn.</u>	278,794	83.8	3,327			65.9					17.9		
New Haven	152,848	17.9	8,494										
In Urban Fringe	126,728	65.9	1,923										
<u>New Orleans, La.</u>	845,237	264.5	3,172				266.5						
New Orleans	627,525	199.9	3,157										
In Urban Fringe	217,712	64.7	3,218										
<u>Newport News, Virginia</u>	298,874	169.1	1,481	17.1		132.0							
In Central Cities	202,920	132.0	1,537										
Newport News	113,462	75.0	1,515										
Hampton	89,230	97.0	1,546										
In Urban Fringe	3,958	17.1	148										
<u>New York/Northeastern</u>	14,114,927	1,891.5	7,462				1516.8		11.7			75.1	328.1
In Central Cities	13,743,015	378.9	23,321										
New York City	7,781,988	315.1	24,697										
Newark	465,220	23.6	7,170										
Jersey City	276,101	13.0	21,239										
Paterson	143,683	8.4	17,103										
Clifton	82,888	11.7	7,016										
Passaic	33,962	3.1	17,807										
In Urban Fringe	5,371,912	1,516.6	3,542										
<u>Norfolk, Portsmouth,</u>	597,825	108.6	4,676				40.6		68.0				
In Central Cities	473,235	85.0	5,785										
Norfolk	353,472	50.0	6,217										
Portsmouth	116,773	18.0	6,376										
In Urban Fringe	87,100	40.6	2,147										
<u>Norwalk, Conn.</u>	82,275	38.8	2,123		14.1		24.7						
Norwalk	67,775	24.7	2,744										
In Urban Fringe	14,499	14.1	7,228										
<u>Oakdale, Tex.</u>	84,283	19.4	4,345		3.7				35.7				
Oakdale	80,338	15.7	5,117										
In Urban Fringe	3,947	3.7	1,067										
<u>Ogden, Utah</u>	121,927	66.7	1,828		47.8				78.9				
Ogden	70,197	18.9	3,714										
In Urban Fringe	51,730	47.8	1,092										
<u>Oklahoma City, Okla.</u>	429,168	385.2	1,114		321.5	63.7							
Oklahoma	328,252	321.5	1,309										
In Urban Fringe	100,915	63.7	1,647										
<u>Omaha, Neb./Iowa</u>	389,881	89.0	4,381				37.8		81.2				
Omaha	301,568	51.2	5,891										
In Urban Fringe	88,283	37.8	2,338										
<u>Orlando, Fla.</u>	200,995	76.8	2,617				55.7		21.1				
Orlando	88,135	21.1	4,177										
In Urban Fringe	112,860	55.7	2,020										
<u>Pensacola, Fla.</u>	128,049	45.8	2,796					65.8					
Pensacola	56,792	22.1	2,823										
In Urban Fringe	71,297	23.7	2,774										
<u>Peoria, Ill.</u>	181,432	50.4	3,630				35.2		15.2				
Peoria	103,162	15.2	6,797										
In Urban Fringe	78,270	35.2	2,220										

Table 1. (Continued)

URBANIZED AREA	POPULATION (persons)	A.E.4 (sq. mi.)	DENSITY (persons/ sq. mi.)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION														
				1000	1500	2000	2500	3000	4000	5000	6000	75,000	10,000	15,000	20,000	30,000		
<u>Philadelphia, Pa./N.J.</u>	3,035,220	596.7	5,092						469.5								127.2	
Philadelphia	2,002,512	127.2	15,743															
In Urban Fringe	1,032,708	469.5	2,470															
<u>Phoenix, Ariz.</u>	552,043	240.4	2,222			61.0	107.0											
Phoenix	439,170	107.0	2,363															
In Urban Fringe	112,873	61.0	1,859															
<u>Pittsburgh, Pa.</u>	1,004,400	525.0	3,437					870.9									56.1	
Pittsburgh	604,332	56.1	11,171															
In Urban Fringe	1,209,068	470.9	2,542															
<u>Pittsfield, Mass.</u>	62,305	40.2	1,442		40.9	2.3												
Pittsfield	57,379	40.9	1,419															
In Urban Fringe	4,927	2.3	1,023															
<u>Provo, Ontario, Cal.</u>	166,547	71.3	2,616					52.9	18.4									
In Central Cities	113,770	35.2	3,193															
Provo	67,157	10.4	3,650															
Ontario	46,617	17.0	2,619															
In Urban Fringe	72,773	35.1	2,073															
<u>Port Arthur, Tex.</u>	116,165	79.5	1,464		79.5													
Port Arthur	66,478	45.7	1,459															
In Urban Fringe	49,687	33.8	1,470															
<u>Portland, Me.</u>	111,701	51.2	2,187		29.6				21.6									
Portland	72,960	21.6	2,340															
In Urban Fringe	38,741	29.6	1,322															
<u>Portland, Ore./Wash.</u>	641,495	192.4	3,307					125.2		67.2								
Portland	372,675	67.2	5,508															
In Urban Fringe	279,820	125.2	2,229															
<u>Providence, R.I.</u>	659,542	100.0	3,554					97.5			0.9		17.9					
In Central Cities	203,499	26.5	13,857															
Providence	207,090	17.9	11,592															
Pawtucket	81,001	8.4	2,419															
In Urban Fringe	371,043	101.5	2,227															
<u>Provo, Utah, Utah</u>	60,798	42.4	1,434	7.6	15.6	19.2												
In Central Cities	56,481	38.0	1,504															
Provo	36,047	19.2	1,877															
Utah	12,399	15.6	1,179															
In Urban Fringe	6,318	7.6	838															
<u>Pueblo, Col.</u>	103,336	29.5	4,052		0.6					17.1								
Pueblo	61,101	17.1	3,322															
In Urban Fringe	12,155	0.6	1,647															
<u>Reading, Wis.</u>	95,652	14.6	6,560			3.0					11.2							
Reading	89,184	11.2	7,959															
In Urban Fringe	6,468	3.4	1,974															
<u>Reading, N.C.</u>	93,931	33.5	2,806					33.5										
Reading	93,931	33.5	2,806															
In Urban Fringe																		
<u>Reading, Pa.</u>	160,297	33.7	4,843					23.9									9.0	
Reading	99,177	9.6	10,227															
In Urban Fringe	62,120	23.9	2,643															
<u>Reed, Nev.</u>	79,109	10.3	4,308							10.3								
Reed	51,470	17.0	4,308															
In Urban Fringe	18,719	4.5	4,198															
<u>Richmond, Va.</u>	333,430	69.0	3,768					51.5		37.0								
Richmond	279,959	37.0	3,965															
In Urban Fringe	113,600	51.5	2,202															
<u>Roanoke, Va.</u>	124,750	60.0	3,000			10.4		26.0										
Roanoke	97,110	26.0	3,730															
In Urban Fringe	27,642	16.0	1,920															
<u>Rochester, N.Y.</u>	492,492	113.3	4,359					76.0			31.0							
Rochester	319,611	36.0	4,759															
In Urban Fringe	178,791	76.9	2,273															
<u>Rockford, Ill.</u>	171,681	43.2	3,974					17.2		26.0								
Rockford	126,706	26.0	4,871															
In Urban Fringe	44,975	17.2	2,613															

Table 1. (Continued)

URBANIZED AREA	POPULATION (Persons)	AREA (mi ²)	DENSITY (persons/ mi)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION												
				1930	1950	1950- 1955	2000- 2005	3000- 4000	4000- 6000	6000- 8000	8,000- 10,000	10,000- 15,000	15,000- 20,000	20,000-		
<u>Sacramento, Cal.</u>	451,820	134.0	3,373				88.9	45.1								
Sacramento	191,667	45.1	4,250													
In Urban Fringe	260,153	88.9	2,927													
<u>Saginaw, Mich.</u>	129,219	31.1	4,155				14.8	18.8								
Saginaw	98,265	16.8	5,820													
In Urban Fringe	30,954	14.3	2,134													
<u>St. Joseph, Mo., Kan.</u>	81,187	28.8	2,819		1.2		27.7									
St. Joseph	79,873	27.7	2,876													
In Urban Fringe	1,314	1.1	1,376													
<u>St. Louis, Mo., Ill.</u>	1,647,693	323.2	5,130					282.2				61.8				
St. Louis	750,616	61.8	12,296													
In Urban Fringe	917,367	262.2	3,500													
<u>St. Petersburg, Fla.</u>	324,842	115.2	2,820				61.2	54.8								
St. Petersburg	181,208	56.8	3,357													
In Urban Fringe	143,634	61.2	2,345													
<u>Salt Lake City, Utah</u>	348,681	131.7	2,647				75.8	56.1								
Salt Lake City	109,458	56.1	2,377													
In Urban Fringe	159,223	75.8	2,106													
<u>San Angelo, Tex.</u>	58,815	29.7	1,980			29.7										
San Angelo	58,815	29.7	1,980													
<u>San Antonio, Tex.</u>	641,985	192.4	3,337			31.8		160.5								
San Antonio	587,718	160.5	3,662													
In Urban Fringe	54,267	31.9	1,701													
<u>San Bernardino, River- side, Cal.</u>	377,531	149.4	2,529			103.5	40.8	25.3								
In Central Cities	178,254	65.9	2,675													
San Bernardino	91,322	25.1	3,633													
Riverside	86,932	40.8	2,077													
In Urban Fringe	201,277	173.5	1,945													
<u>San Diego, Cal.</u>	325,175	275.7	3,033				192.4	83.3								
San Diego	573,220	192.4	2,979													
In Urban Fringe	252,955	83.3	3,157													
<u>San Francisco, Contra- costa, Cal.</u>	2,429,683	571.5	4,253				470.9	53.8				47.6				
In Central Cities	1,107,868	100.8	11,013													
San Francisco	740,316	47.6	15,553													
Oakland	267,552	53.0	6,935													
In Urban Fringe	1,322,799	470.9	2,809													
<u>San Jose, Cal.</u>	682,805	223.1	2,722				168.8	54.5								
San Jose	294,198	54.5	3,747													
In Urban Fringe	378,607	168.8	2,384													
<u>Santa Barbara, Cal.</u>	72,740	29.7	2,449		18.8		19.7									
Santa Barbara	50,768	19.7	2,983													
In Urban Fringe	13,972	10.0	1,397													
<u>Savannah, Ga.</u>	169,087	61.1	2,770		13.6			41.5								
Savannah	149,245	41.5	2,596													
In Urban Fringe	20,842	19.6	1,533													
<u>Scranton, Pa.</u>	218,876	104.8	2,018		79.5			25.3								
Scranton	111,442	25.3	4,405													
In Urban Fringe	99,233	79.5	1,748													
<u>Seattle, Wash.</u>	684,199	218.3	3,128				169.8	88.9								
Seattle	557,087	88.9	6,295													
In Urban Fringe	207,022	169.8	2,050													
<u>Shreveport, La.</u>	288,583	52.4	3,981				16.4	36.8								
Shreveport	180,372	36.8	4,866													
In Urban Fringe	44,271	16.4	2,696													
<u>Sioux City, Iowa/ Sioux Falls, S. Dak.</u>	97,926	50.3	1,803			54.2										
Sioux City	89,159	49.4	1,805													
In Urban Fringe	8,767	4.9	1,789													

Table 1. (Continued)

SPPRIZED AREA	POPULATION (Persons)	AREA sq. mi.	DENSITY persons/ sq. mi.	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION													
				1000- 1500	1500- 2000	2000- 2500	2500- 3000	3000- 3500	3500- 4000	4000- 4500	4500- 5000	5000- 5500	5500- 6000	6000- 6500	6500- 7000		
<u>Sioux Falls, S.D.</u>	66,340	11.4	3,327				0.4	17.0									
Sioux Falls	65,666	11.0	3,651														
In Urban Fringe	7,118	0.4	2,790														
<u>South Bend, Ind./Mich.</u>	210,933	64.0	3,327			40.2				25.8							
South Bend	132,445	23.6	5,585														
In Urban Fringe	66,489	40.2	2,151														
<u>Spokane, Wash.</u>	228,930	66.7	3,540			21.1				43.0							
Spokane	181,608	43.0	4,223														
In Urban Fringe	45,110	23.7	2,108														
<u>Springfield, Ill.</u>	111,403	32.6	3,417			11.2		21.4									
Springfield	81,271	27.4	3,891														
In Urban Fringe	28,732	11.2	2,572														
<u>Springfield, Mo.</u>	97,024	35.6	2,731			0.0		36.7									
Springfield	95,883	34.7	2,762														
In Urban Fringe	1,159	3.9	1,510														
<u>Springfield, Ohio</u>	90,157	22.6	4,377			6.0				75.7							
Springfield	82,723	15.7	5,269														
In Urban Fringe	7,434	4.3	1,517														
<u>Springfield, Chicago, Ill.</u>	449,777	239.3	1,883	164.5			22.8	18.4		31.1							
In Central Cities	296,704	74.3	3,986														
Springfield	174,453	31.7	5,271														
Chicago	41,593	18.4	3,145														
Chicago	52,689	22.8	2,311														
In Urban Fringe	161,072	164.5	579														
<u>Stanford, Conn.</u>	168,990	49.7	3,402		59.7		18.6										
Stanford	92,710	38.4	2,414														
In Urban Fringe	76,277	59.7	1,264														
<u>Steubenville, Martin, Ohio, W. Va.</u>	81,613	36.8	2,218			31.0				5.9							
In Central Cities	57,696	24.4	2,366														
Steubenville	32,890	4.3	5,113														
Martin	28,227	3.5	7,994														
In Urban Fringe	22,917	12.4	1,847														
<u>Stockton, Calif.</u>	147,004	38.4	3,838						26.0								
Stockton	86,327	22.9	3,769														
In Urban Fringe	55,283	14.5	3,567														
<u>Syracuse, N.Y.</u>	133,288	37.7	4,923				47.7			29.0							
Syracuse	218,338	25.1	8,692														
In Urban Fringe	117,248	42.7	2,749														
<u>Tacoma, Wash.</u>	214,930	87.8	2,596			39.5				67.5							
Tacoma	167,979	87.5	2,115														
In Urban Fringe	68,957	35.3	1,897														
<u>Tampa, Fla.</u>	301,790	103.4	2,919			19.4				43.0							
Tampa	278,973	85.1	3,235														
In Urban Fringe	28,823	18.4	1,459														
<u>Terre Haute, Ind.</u>	87,435	31.7	2,568			7.8		24.7									
Terre Haute	72,620	28.7	2,535														
In Urban Fringe	8,915	1.0	1,474														
<u>Texarkana, Tex./Ark.</u>	53,421	26.7	2,001	4.8		15.9			6.0								
In Central Cities	50,006	21.4	2,293														
Texarkana, Tex.	30,278	5.4	5,501														
Texarkana, Ark.	19,728	8.0	2,498														
In Urban Fringe	3,414	0.8	711														
<u>Toledo, Ohio</u>	439,281	114.9	3,268		66.7					60.2							
Toledo	338,023	48.2	6,990														
In Urban Fringe	122,227	66.7	1,547														
<u>Topeka, Kan.</u>	119,500	36.2	3,301	0.3					36.1								
Topeka	119,488	36.1	3,317														
In Urban Fringe	16	0.1	160														
<u>Trenton, N.J./Pa.</u>	242,471	75.1	3,219			67.9									7.4		
Trenton	176,167	1.8	7,429														
In Urban Fringe	119,014	67.9	1,449														
<u>Tucson, Ariz.</u>	227,431	16.4	2,632	15.6					79.9								
Tucson	212,997	11.9	3,007														
In Urban Fringe	14,434	15.4	935														

Table 1. (Continued)

UNCLASSIFIED AREA	POPULATION (Persons)	AREA (mi ²)	DENSITY (persons/ mi)	DISTRIBUTION OF LAND AREA BY DENSITY OF POPULATION													
				1000-	1000-	1500-	2000-	3000-	4000-	6000-	8000-	10,000-	15,000-	20,000-	25,000-		
<u>Indiana, Ohio.</u>	290,922	70.7	4,238			22.4			41.8								
Tulsa	261,683	47.8	5,475														
In Urban Fringe	37,237	22.4	1,662														
<u>Mississippi, Ala.</u>	76,815	30.5	2,519		9.5			21.0									
Tuscaloosa	63,310	21.0	3,018														
In Urban Fringe	13,445	9.5	1,415														
<u>Texas, Tex.</u>	51,739	18.6	2,792			0.3	10.3										
Tyler	51,230	18.3	2,799														
In Urban Fringe	509	0.3	1,697														
<u>Utica, Penn., N.Y.</u>	107,779	112.4	1,671	77.1		10.3			17.0								
In Central Cities	152,056	94.1	1,616														
Utica	103,410	17.0	5,006														
Utica	91,640	77.1	676														
In Urban Fringe	35,723	18.3	1,918														
<u>Waco, Tex.</u>	116,163	64.9	1,798	27.6		37.4											
Waco	97,028	37.3	2,622														
In Urban Fringe	19,355	27.6	645														
<u>Washington, D.C./</u> <u>Md./Pa.</u>	1,000,423	340.7	5,308					279.3					61.4				
Washington	763,956	61.4	12,442														
In Urban Fringe	1,040,637	279.3	3,760														
<u>Waterbury, Conn.</u>	141,526	50.4	2,810			22.0			27.6								
Waterbury	107,139	27.6	3,882														
In Urban Fringe	34,496	22.4	1,513														
<u>Waterloo, Iowa</u>	162,827	49.5	2,077			19.7		33.8									
Waterloo	71,755	33.8	2,123														
In Urban Fringe	31,072	19.7	1,978														
<u>West Palm Beach, Fla.</u>	172,055	98.6	1,793		79.9				18.7								
West Palm Beach	58,208	19.7	3,004														
In Urban Fringe	116,827	79.9	1,460														
<u>Wheeling, W. Va., Ohio</u>	99,951	27.3	3,625					6.5		10.8							
Wheeling	53,490	10.8	4,944														
In Urban Fringe	45,951	16.5	2,781														
<u>Wichita, Kan.</u>	292,138	79.7	3,643		27.8					51.9							
Wichita	254,658	51.9	4,907														
In Urban Fringe	37,480	27.8	1,740														
<u>Wichita Falls, Tex.</u>	102,104	27.4	2,730					37.3		0.1							
Wichita Falls	101,724	37.3	2,727														
In Urban Fringe	480	0.1	3,000														
<u>Wilkes-Barre, Pa.</u>	233,932	74.1	3,157					67.2					6.9				
Wilkes-Barre	63,551	6.9	9,210														
In Urban Fringe	170,381	67.2	2,535														
<u>Wilmington, Del., Md.</u>	283,667	90.0	3,152					78.2				15.8					
Wilmington	95,827	15.8	6,066														
In Urban Fringe	197,840	74.2	2,532														
<u>Winston-Salem, N.C.</u>	128,174	43.0	2,991		11.9				31.1								
Winston-Salem	121,135	31.1	3,573														
In Urban Fringe	17,041	11.9	1,432														
<u>Worcester, Mass.</u>	225,444	67.3	3,678			26.3				37.0							
Worcester	186,587	37.0	5,043														
In Urban Fringe	38,857	24.3	1,599														
<u>York, Pa.</u>	100,872	10.4	9,699										9.7		6.7		
York	54,504	4.7	11,597														
In Urban Fringe	46,358	5.7	8,135														
<u>Youngstown, Akron,</u> <u>Ohio/Pa.</u>	372,748	108.0	3,451					63.9		64.1							
In Central Cities	226,337	44.1	5,172														
Youngstown	166,609	33.2	5,021														
Akron	59,800	10.9	5,472														
In Urban Fringe	145,611	63.9	2,291														

1,158 2,090 2,017 5,065 7,233 3,133 940 328 406 442 328

Total Land Area for which Density Greater than or Equal to that in Density Class

Total U.S. Urban
Areas (1950) 25,849,62729,506.3 3,752
 In Central Cities 57,915,12278,637.7 5,229
 In Urban Fringe 37,873,35516,706.6 2,575

25,849,627 29,506,300 19,000 13,020 5,770 2,680 1,716 1,348 770 328

Table 2. (Continued)

CENSUS AREA	POPULATION (Persons)	AREA (sq. mi.)	DENSITY Persons/ sq. mi.	DISTRIBUTION OF POPULATION BY DENSITY OF POPULATION												
				1000	1000-	1000-	2000-	2000-	4000-	6000-	8,000-	10,000-	15,000-	20,000-		
Fall River, Mass./R.I.	123,951	47.6	2,604			24,059	89,942									
Fargo, S.D./North Dak., S.D.	72,729	29.2	2,492	3,134				22,934	49,795							
Fitchburg-Lewiston Cov., Mass.	72,347	67.7	1,068	27,629		44,418										
Flint, Mich.	277,753	70.2	3,956			89,049				208,704						
Ft. Lauderdale- Wellington, Fla.	219,051	123.0	1,780			35,237	281,054	63,640								
Ft. Smith, Ark./ Ohio	67,649	29.3	2,308			8,549	52,091									
Ft. Wayne, Ind.	179,371	43.0	4,171			17,798			151,573							
Ft. Worth, Tex.	522,652	172.6	3,028	743,414			356,360									
Fresno, Cal.	273,444	69.6	3,927				79,818			193,626						
Gadsden, Ala.	68,944	47.0	1,467	19,856		95,053										
Galveston-Texas City, Tex.	118,482	183.2	647	773,116,482												
Grand Rapids, Mich.	294,228	91.2	3,226			118,917				175,311						
Great Falls, Mont.	57,629	12.9	4,467			2,372				55,257						
Green Bay, Wis.	57,162	63.6	900		34,273				22,889							
Greensboro, N.C.	123,224	29.8	4,138			3,769	119,454									
Greenville, S.C.	123,037	32.6	3,772				123,037									
Hamilton, Ohio	69,773	34.1	2,046	17,424						72,197						
Hartford- Springfield, Conn.	61,438	51.1	1,282	0,029		16,422										
Harrisburg, Pa.	259,831	69.2	3,755						129,894						79,937	
Hartford, Conn.	201,019	131.2	1,532			219,041								167,173		
High Point, N.C.	55,543	23.7	2,343		4,000		62,543									
Houston, Tex.	351,323	99.8	3,520						351,323							
Houston, Tex.	1,129,978	130.5	8,658			281,429	848,549									
Huntington, W. Va./ Akron, Ky./ Ohio	163,722	42.2	3,880				62,105								63,627	
Huntsville, Ala.	79,979	53.2	1,499		74,278											
Indianapolis, Ind.	623,360	144.9	4,302				163,822			459,538						
Jackson, Miss.	71,412	22.1	3,231			29,692				41,720						
Jackson, Miss.	107,489	49.7	2,160	3,059					104,430							
Jacksonville, Fla.	372,369	171.4	2,172				111,929			260,440						
Jonestown, Pa.	93,473	21.0	4,454				42,525								50,948	
Julesburg, Colo.	116,595	35.9	3,244				49,005			67,590						
Kalamazoo, Mich.	175,039	42.1	4,158			33,379			141,660							
Kansas City, Mo./ Mo.	627,121	292.4	2,145				445,557		181,564							
Knoxville, Tenn.	72,552	13.2	5,493			4,953				67,600						
Knoxville, Tenn.	172,739	59.7	2,892			68,957			103,782							
Labette Chapel, La.	89,119	24.6	3,620						89,119							
Lancaster, Pa.	93,859	29.2	3,214		32,868										60,991	
Lansing, Mich.	159,325	67.2	2,370				61,518			97,807						
Laredo, Tex.	69,870	12.5	5,588							69,870						
Las Vegas, Nev.	89,427	34.3	2,607				89,427									
Lawrence-Kanawha- Hill, West. V. S.	166,125	79.5	2,090		46,348	68,848								70,929		
Lexington, Va.	61,941	13.2	4,693	264						61,677						
Louisville-Kentucky Mo.	65,253	93.9	690	34,643	68,823											
Lexington, Ky.	111,940	27.2	4,118						49,129	62,811						
Lima, Ohio	62,933	13.1	4,803				11,835			51,098						
Lincoln, Neb.	123,228	25.6	4,813	7,697						115,531						
Little Rock-S. Little Rock, Ark.	183,917	62.2	2,956		19,173		88,622			185,292						
Lorain-Elyria, Ohio	142,008	61.4	2,313	23,146						118,862						
Los Angeles- Long Beach, Cal.	6,403,797	275.9	23,213						6,146,023	257,774						
Louisville, Ky./ Ind.	603,769	185.6	3,254				218,229			385,540						
Lowell, Mass.	179,547	29.9	5,991			68,440				111,107						
Lubbock, Tex.	189,229	73.2	2,585	593		120,691										

Table 2. (Continued)

CITY AND STATE	POPULATION	AREA (Sq. Miles)	DENSITY (Persons/Sq. Mi.)	DISTRIBUTION OF POPULATION BY SIZE OF POPULATION													
				1000	1000-	1000-	2000-	2500-	5000-	6000-	10,000-	10,000-	20,000-	20,000-			
San Angelo, Tex.	60,010	63.7	1,900			60,010											
San Antonio, Tex.	641,000	103.6	3,327			64,207		227,710									
San Bernardino, Calif.	377,000	100.6	2,220			191,277	64,332	91,522									
San Diego, Calif.	230,170	172.7	1,623				673,200	202,221									
San Francisco, Calif.	2,832,000	461.0	6,143			1,022,700			267,340						740,316		
San Jose, Calif.	622,000	103.1	2,732			200,000		204,100									
Santa Barbara, Calif.	70,700	29.7	2,400	13,072			60,700										
Sarasota, Fla.	149,000	61.1	2,780		29,642			140,260									
Scranton, Pa.	210,000	100.0	2,100		69,230				111,040								
Seattle, Wash.	600,000	222.0	2,623					207,000			537,000						
Shreveport, La.	210,000	61.6	3,401				60,211		240,272								
Sioux City, Iowa	67,000	64.3	1,000			97,000											
Sioux Falls, S.D.	60,000	17.0	3,527					1,110	60,000								
South Gate, Ind.	210,000	60.0	3,500					60,000		122,000							
Spokane, Wash.	220,000	66.1	3,340					60,000		120,000							
Springfield, Ill.	111,111	22.0	2,417					20,122	63,271								
Springfield, Mo.	97,200	20.0	2,731			1,300	90,000										
Springfield, Ohio	90,100	20.0	4,377			7,000			62,723								
Springfield, Mass.	600,777	220.0	1,000	101,072				60,000	61,000	170,000							
Stanford, Conn.	100,000	60.1	1,700		70,277			60,710									
Stamford, Conn.	60,000	20.0	2,210					60,110		20,000							
Stanton, Calif.	101,000	20.0	3,650						101,000								
Springer, N.Y.	300,000	60.0	4,000					117,000			210,000						
Tacoma, Wash.	210,000	60.0	2,500			60,000			107,000								
Tampa, Fla.	201,000	100.0	2,010		20,200				270,000								
Terra Haute, Ind.	61,000	31.7	2,500		6,000			72,000									
Tomball, Tex.	60,000	20.0	2,000	2,010				20,210		19,790							
Toledo, Ohio	430,000	120.0	3,250		120,300					310,000							
Toledo, Mo.	110,000	30.0	3,300	10					110,000								
Toledo, N.J.	200,000	70.0	2,210			120,200								110,000			
Toledo, Ohio	227,000	60.0	2,270	10,041					210,000								
Toledo, Ohio	220,000	70.0	2,250					37,227		201,000							
Tomball, Mo.	70,000	30.0	2,510		13,000				60,370								
Tyler, Tex.	61,000	10.0	2,722			200	61,000										
Union-Camp, N.Y.	100,000	100.0	1,000	51,000				20,723		100,000							
Waco, Tex.	110,000	60.0	1,700	10,335					97,000								
Washington, D.C.	1,000,000	100.0	1,000						1,000,000								
Waterbury, Conn.	101,000	60.0	2,010			20,000			107,120								
Waterloo, Iowa	100,000	60.0	2,000			31,072		71,750									
W. Palm Beach, Fla.	170,000	60.0	1,700		110,000				60,000								
Wheeling, W. Va.	60,000	20.0	2,000					60,000		20,000							
Wichita, Kan.	220,000	70.0	2,000		37,000				200,000								
Wichita Falls, Tex.	100,000	20.0	2,700					101,700	200								
Wilkes-Barre, Pa.	220,000	70.0	2,100					170,000									
Wilmington, Del.	200,000	60.0	2,100					100,000			60,000						
Winston-Salem, N.C.	120,000	60.0	2,000		17,000					90,000							
Worcester, Mass.	220,000	60.0	2,000			20,000			110,000								
York, Pa.	100,000	20.0	2,000						100,000								
Youngstown, Ohio	170,000	60.0	2,000					100,000			60,000						

APPENDIX B

**EXCERPT FROM STATEMENT OF SECRETARY OF DEFENSE,
ROBERT S. McNAMARA BEFORE THE HOUSE ARMED
SERVICES COMMITTEE ON THE FISCAL YEAR 1966-70
DEFENSE PROGRAM AND 1966 DEFENSE BUDGET,
FEBRUARY 18, 1965**

Excerpt from Statement of Secretary of Defense Robert S. McNamara before the House Armed Services Committee on the Fiscal Year 1966-70 Defense Program and 1966 Defense Budget, February 18, 1965.

CAPABILITIES OF THE PROGRAMED FORCES FOR DAMAGE LIMITATION

The ultimate deterrent to a deliberate nuclear attack on the United States and its Allies is our clear and unmistakable ability to destroy an aggressor as a viable society, even after our forces have been attacked. But if deterrence fails, whether by accident or miscalculation, it is essential that forces be available to limit the damage of such an attack to ourselves and our Allies.

The utility of the Strategic Offensive Forces in the Damage Limiting role is critically dependent on the timing of the enemy attack on U.S. urban targets. For example, if an enemy missile attack on U.S. cities were to be sufficiently delayed after an attack on U.S. military targets (an unlikely contingency) our strategic missiles (which can reach their targets in less than one hour) could significantly reduce the weight of that attack by destroying, prior to launch, a large part of the enemy's forces withheld for use against our cities.

If the urban attack were delayed still longer, our bomber force could also contribute to the Damage Limiting objective. However, if the enemy were to launch his attack against our urban areas at the beginning of a general nuclear war, our Strategic Offensive Forces -- both missiles and bombers -- would have a greatly reduced value in the Damage Limiting role. Their contribution in that case would be limited to the destruction of enemy residual forces -- unlaunched strategic missiles and bombers, re-fire missiles, and any other strategic forces the enemy might withhold for subsequent strikes.

Since we have no way of knowing how the enemy would execute a nuclear attack upon the United States, we must also intensively explore alternative "defensive" systems as means of limiting damage to ourselves. The problem here is to achieve an optimum balance among all the elements of the general nuclear war forces, particularly in their Damage Limiting role. This is what we mean by "balanced" defense.

Although a deliberate nuclear attack upon the United States may seem a highly unlikely contingency in view of our unmistakable Assured Destruction capability, it must receive our urgent attention because of the enormous consequences it would have. In this regard, I should make two points clear. First, in order

to preclude any possibility of miscalculation by others, I want to reiterate that although the U.S. would itself suffer severely in the event of a general nuclear war, we are fully committed to the defense of our Allies. Second, we do not view Damage Limitation as a question of concern only to the U.S. Our offensive forces cover strategic enemy capabilities to inflict damage on our Allies in Europe just as they cover enemy threats to the continental U.S.

To appreciate fully the implications of an attack on our cities, it is useful to examine the Assured Destruction objective from the attacker's point of view, since our Damage Limiting problem is, in effect, his Assured Destruction problem.

Several points are evident from our analysis of this problem. First, it is clear that with limited fallout protection, an enemy attack on our urban areas would cause great loss of life, chiefly because of the heavy concentration of population in our large cities, which I noted earlier. Second, the analysis clearly demonstrates the distinct utility of a nation-wide fallout shelter program in reducing fatalities, at all levels of attack. Third, the analysis shows that the attack would destroy a large percentage of our industrial capacity. Each successive doubling of the number of delivered warheads would increase the destruction of our population and industrial capacity by proportionately smaller amounts, since smaller and smaller cities would have to be attacked.

In order to assess the potentials of various Damage Limiting programs we have examined a number of "balanced" defense postures at different budget levels. These postures are designed to defend against the assumed threat in the early 1970s. To illustrate the critical nature of the timing of the attack, we used two limiting cases. First, we assumed that the enemy would initiate nuclear war with a simultaneous attack against our cities and military targets. Second, we assumed that the attack against our cities would be delayed long enough for us to retaliate against the aggressor's military targets with our missiles. In both cases, we assumed that all new systems will perform essentially as estimated since our main purpose here was to gain an insight into the overall problem of limiting damage. The results of this analysis are summarized in the table below.

Estimated Effect on U.S. Fatalities of Additions to
the Approved Damage Limiting Program
(Based on 1970 population of 210 million)

<u>Additional Investment</u>	<u>Millions of U.S. Fatalities</u>	
	<u>Early Urban Attack</u>	<u>Delayed Urban Attack</u>
\$ 0 billion	149	122
5 billion	120	90
15 billion	96	59
25 billion	78	41

The \$5 billion of additional investment (of which about \$2 billion would come from non-Federal sources) would provide a full fallout shelter program for the entire population. The \$15 billion level would add about \$8-1/2 billion for a limited deployment of a low cost configuration of a missile defense system, plus about \$1-1/2 billion for new manned bomber defenses. The \$25 billion level would provide an additional \$8-1/2 billion for anti-missile defenses (for a total of about \$17 billion) and another \$1-1/2 billion for improved manned bomber defenses (for a total of \$3 billion).

The number of strategic missiles required to take full advantage of the possibility that the aggressor might delay his attack on our cities is already included in the forces programed through 1970.

The high utility of a full nation-wide fallout shelter program in the Damage Limiting role is apparent from the foregoing table -- it would reduce fatalities by about 30 million compared with the present level of fallout protection. The following table shows that a transfer of resources from fallout shelters to other defensive systems would result in substantially less effective defense postures for any given budget level.

Estimated Effect of Fallout Protection on U.S. Fatality
Levels for Several Damage Limiting Programs
(Based on 1970 total population of 210 million)

<u>Additional Investment</u>	<u>Millions of U.S. Fatalities</u>			
	<u>Early Urban Attack</u>		<u>Delayed Urban Attack</u>	
	<u>Partial Protection</u>	<u>Full Protection</u>	<u>Partial Protection</u>	<u>Full Protection</u>
\$ 0 billion	149	149	122	122
5 billion	145	120	107	90
15 billion	121	96	79	59
25 billion	107	78	59	41

The figures indicate that in the case of an early attack on our urban centers, for the same level of survivors, any Damage Limiting program which excludes a complete fallout shelter system would cost at least twice as much as a program which includes such a system -- even under the favorable assumption that the enemy would not exploit our lack of fallout protection by surface bursting his weapons upwind of the fallout areas. In addition, fallout shelters should have the highest priority of any defensive system because they decrease the vulnerability of the population to nuclear contamination under all types of attack. Since at the \$15 and \$25 billion budget levels, the bulk of the additional funds would go to missile defense, a high confidence in the potential effectiveness of the system would have to be assured before commitment to such large expenditures would be justified. Furthermore, at these budget levels, missile defenses would also have to be interlocked with either local or area bomber defenses in order to avoid having one type of threat undercut a defense against the other.

Although missiles clearly have a better chance than bombers of destroying residual enemy offensive forces because they can reach them much sooner, we also examined the effectiveness of bombers in the Damage Limiting role. In one such analysis we compared a strategic aircraft -- the AMSA -- and two strategic missiles -- MINUTEMAN II and an improved missile for the 1970s. (This improved missile could be developed and deployed within the same time frame as the AMSA). Although there are many uncertainties with regard to both the assumptions and the planning factors used in this comparison, it did demonstrate clearly one important point, namely, that there are less costly ways of destroying residual enemy missiles and aircraft than by developing and deploying a new AMSA -- even ignoring the fact that enemy missile silos and bomber fields are far more likely to be empty by the time the bombers pass over than when the missiles arrive.

There is also the possibility in the 1970s of a small nuclear attack on the United States by a nation possessing only a primitive nuclear force. Accordingly, we have undertaken a number of studies in this area. Our preliminary conclusion is that a small, balanced defense program could, indeed, significantly reduce fatalities from such an attack. However, the lead time for additional nations to develop and deploy an effective ballistic missile system capable of reaching the United States is greater than we require to deploy the defense.

In summary, several tentative conclusions may be drawn from our examination of the Damage Limiting problem:

- (1) With no new U.S. defenses against nuclear attack in the early 1970s, the strategic offensive forces likely to confront us could inflict a very high level of fatalities on the United States.
- (2) A nation-wide civil defense program costing about \$5 billion could reduce fatalities by about 30 million.
- (3) If active defense systems operate as estimated, a large, balanced Damage Limiting program for an additional \$20 billion could reduce fatalities associated with an early urban attack by another 40 million.
- (4) There is no defense program within this general range or expenditures which would reduce fatalities to a level much below 80 million unless the enemy delayed his attack on our cities long enough for our missile forces to play a major Damage Limiting role.

Moreover, we have thus far not taken into account a factor which I touched on at the beginning of this discussion, and that is possible reactions of potential aggressors which could serve to offset our Damage Limiting initiatives. Let me illustrate this point with the following example. Suppose we had already spent an additional \$15 billion for a balanced, Damage Limiting posture of the type I described earlier, expecting that it would limit fatalities to, say, 95 million in the event of a first strike against our cities. We then decide to spend another \$10 billion to reduce the fatalities to about 75 million. If the enemy chooses to offset this increase in survivors, he should be able in the 1970s to do so by spending about \$6 billion more on his offensive forces, or 60 percent of our cost.

At each successively higher level of U.S. expenditures, the ratio of our costs for Damage Limitation to the potential aggressor's costs for Assured Destruction becomes less and less favorable for us. Indeed, at the level of spending required to limit fatalities to about 40 million in a large first strike against our cities, we would have to spend on Damage Limiting programs about four times what the potential aggressor would have to spend on damage creating forces, i.e., his Assured Destruction forces.

This argument is not conclusive against our undertaking a major new Damage Limiting program. The resources available to the Soviets are more limited than our own and they may not actually react to our initiatives as we have assumed. But it does underscore

the fact that beyond a certain level of defense, the cost advantage lies increasingly with the offense, and this fact must be taken into account in any decision to commit ourselves to large outlays for additional defensive measures.

Appendix C

CLINICAL FEATURES OF RADIATION INJURY

CLINICAL FEATURES OF RADIATION INJURY

A. GENERAL

All that is known about the quantitative immediate effects of various radiations on normal humans comes from analysis of experience with radiation therapy (sick humans), from studies of accidental exposure, from the study of the Japanese who survived the atomic bombing, and from controlled experiments with animals. Even though much of the information is indirect, more is known about radiation than about any other agent capable of causing mass casualties. In an emergency due to radioactive fallout, the casualty rate for any group of people can be predicted with considerable confidence, on the basis either of radiological exposure data or of medical evaluation of a representative sample of the group.² A system of prediction consists of a classification of the varieties of radiation injuries, the clinical manifestations and prognosis of each

¹National Committee on Radiation Protection and Measurements Report No. 29, Exposure to Radiation in an Emergency, January 1962, p. 59 et seq.

²The Defense Atomic Support Agency made the following comment on this sentence during review of this paper:

"The statement that in an emergency the casualty rate can be predicted with considerable confidence can be rather misleading. Enough is known, if a certain dose is given, to predict what would happen to an individual. However, in an emergency situation, the dosages or conditions of exposure will not be well enough known. Even 20 years after the Japanese explosions these are not well known. A medical evaluation will not completely separate the groups because there is too much overlapping between the groups."

variety, and the dose, or range of dose, or conditions of exposure, responsible for each variety.

B. CLASSIFICATION OF RADIATION INJURY

Asymptomatic, or inapparent, or undetectable radiation injury occurs when the brief exposure dose, or the ERD, or the dose of internal (β - γ) radiation is less than 50 r. The effects of a single, brief dose between about 15 and 50 r can be detected when statistical methods are applied to blood-count data from a sufficiently large group of people. Presumably, the same is true for the effects of an ERD less than about 50 r. Except for the statistical change in blood count, no one will be aware of exposure in this range.

Acute radiation sickness¹ (also called the "acute radiation syndrome," "whole-body radiation injury," etc.) is caused by external or internal γ or X radiation. Clinical manifestations include general "toxic" symptoms,² such as weakness, nausea, easy fatigue, etc., and specific symptoms and signs caused by damage to the gastrointestinal tract, the blood-forming organs, the central nervous system, etc. The signs of radiation sickness include alterations of the blood count, excretion of abnormal substances in the urine, loss of hair (epilation), a tendency to bleed easily, etc. Radiation sickness may consist of nothing more than a decrease in the white cell count and slight fatigue, or it may be so severe that death occurs within hours of the onset of exposure. Five clinical groups can be distinguished on the basis of severity which can be correlated with the size of the dose.

¹Radiation sickness is described as acute when clinical manifestations occur early and do not last longer than 6 months.

²Symptoms are what the patient complains about, e.g., headache, weakness, etc. Signs of radiation injury are observed by an examiner, e.g., hemorrhage, loss of hair, etc., or detected by a laboratory test, e.g., low white cell count, etc.

Group I: Less than half this group vomit within 24 hours after the onset of exposure. There are either no subsequent symptoms or, at most, weakness and easy fatigue. There is a decrease in the white blood cell count (which is most marked in the case of the lymphocytes) and in the platelet count. Less than 5 percent (1 out of 20) require medical care. All others can perform their customary tasks. Any deaths that occur are caused by complications. Sickness of this type has been seen after brief, whole-body doses of γ and X radiation in the range of 50 to 200 r. An ERD of external γ radiation of 50 to 200 r may have a similar effect.

Group II: More than half this group vomit soon after the onset of exposure and are sick for a few days. This is followed by a period of 1 to 3 weeks when there are few or no symptoms. During the latent period, typical changes occur in the blood count and can be used for diagnosis. At the end of the latent period, epilation (loss of hair) is seen in more than half, and this is followed by a moderately severe illness due primarily to the damage to the blood-forming organs. Most of the people in this group require medical care. More than half will survive, with the chances of survival being better for those who received the smaller doses. Sickness of this type has been seen after brief, whole-body doses of γ or X radiation on the order of 200 to 450 r. An ERD of external γ radiation of the same size will probably cause a similar illness.

Group III: This is a more serious version of the sickness described as Group II. The initial period of illness is longer, the latent period is shorter, and the main episode of illness is characterized by extensive hemorrhages and complicating infections. People in this group need medical care and hospitalization. Less than half will survive, with the chances of survival being poorest for those who received the largest doses. Sickness of this type has been seen after brief whole-body γ radiation with doses in excess of 450 r. It is possible that an ERD of external γ radiation of the same size will have a similar effect.

Group IV: This is an accelerated version of the sickness described as Group III. All in this group begin to vomit soon after the onset of exposure, and this continues for several days or until death. Damage to the gastrointestinal tract predominates, manifested by intractable diarrhea, which soon becomes bloody. Changes in the blood count occur early, and within a few days the total white cell count may be less than 500 per mm.¹ Death occurs

¹Values cited are for brief, whole-body exposure to 250 kvp X rays.

before the end of the second week, and usually before the appearance of hemorrhages or epilation. All in this group need care, and it is unlikely that many will survive. Sickness of this type has been seen after brief, whole-body exposure to γ radiation in excess of 600 r. During protracted exposure to external γ radiation, it is not probable that an illness of this type would be the first evidence of injury.

Group V: This is an extremely severe illness in which damage to the brain and nervous system predominates. Symptoms, signs, and rapid prostration come on almost as soon as the dose has been received. Death occurs within a few hours or a few days. Sickness of this type has been seen after a brief whole-body exposure to γ rays in excess of several thousand r and to equivalent doses from neutrons.

Chronic radiation sickness¹. There is almost no information about the effects of protracted external exposure of man. Some radium chemists and radiologists who worked with radiation before the hazards were recognized frequently developed a progressive refractory anemia and died either from the anemia or from complicating infections. Animal experiments provide little additional information concerning the patterns of chronic radiation sickness that may occur in man. At present, we cannot tell the size of the ERD that will be lethal, when exposure is protracted over a period of years.

¹The sickness is described as chronic when the symptoms and signs persist beyond 6 months.

Appendix D

**PATTERN DIMENSIONS AND AREAS FOR H+1 HOUR
DOSE RATE CONTOURS AND MAXIMUM BIOLOGICAL
DOSE (= 1 WEEK DOSE)**

**CALCULATED FALLOUT CONTOURS
MAXIMUM BIOLOGICAL DOSE**

1.000 BEGAIN YIELD 0. KNOT WIND

EFFECTIVE FALLOUT SNOW .10 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (REMBERGENS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-15.53	15.48	34.51	34.51	1669.53	1600.00	.00
3.00	-14.63	14.64	32.62	32.62	1497.72	1502.83	.00
10.00	-13.69	13.57	30.42	30.42	1300.50	1302.06	.00
30.00	-12.72	12.59	28.26	28.26	1121.40	1123.90	.00
100.00	-11.56	11.52	25.69	25.69	921.85	931.64	.00
300.00	-10.40	10.29	23.09	23.09	748.30	750.34	.00
1000.00	-8.94	8.83	19.86	19.86	552.19	554.40	.00
3000.00	-7.37	7.27	16.37	16.37	376.69	376.23	.00
10000.00	-5.11	5.08	11.36	11.36	180.00	181.93	.00
30000.00	.70	.40	1.56	1.56	2.55	2.70	.00
MAXIMUM DOSE RATE	30542.64						

EFFECTIVE FALLOUT SNOW .20 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (REMBERGENS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-15.00	15.07	60.00	60.00	2042.05	2003.00	.00
3.00	-14.20	14.11	57.36	57.36	2544.79	2551.03	.00
10.00	-13.17	13.04	53.21	53.21	2187.39	2191.00	.00
30.00	-12.15	12.05	49.12	49.12	1860.97	1859.02	.00
100.00	-10.94	10.90	44.20	44.20	1509.99	1516.49	.00
300.00	-9.79	9.56	39.18	39.18	1183.41	1185.80	.00
1000.00	-8.12	8.10	32.81	32.81	820.41	834.20	.00
3000.00	-6.35	6.21	25.65	25.65	504.62	506.07	.00
10000.00	-3.49	3.39	14.10	14.10	150.83	152.39	.00
MAXIMUM DOSE RATE	16432.63						

EFFECTIVE FALLOUT SNOW .40 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (REMBERGENS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-16.55	14.50	114.43	114.43	5203.31	5221.58	.00
3.00	-13.64	13.52	107.28	107.28	4558.78	4576.89	.00
10.00	-12.57	12.45	98.84	98.84	3873.89	3884.00	.00
30.00	-11.30	11.47	90.46	90.46	3225.92	3254.20	.00
100.00	-10.21	10.09	80.27	80.27	2553.15	2559.16	.00
300.00	-8.86	8.76	69.69	69.69	1919.81	1928.55	.00
1000.00	-7.10	6.97	55.83	55.83	1230.67	1234.47	.00
3000.00	-4.90	4.91	39.12	39.12	602.16	607.48	.00
MAXIMUM DOSE RATE	8656.65						

**CALCULATED FALLOUT CONTOURS
MAXIMUM BIOLOGICAL DOSE**

1,000 KILOGRAM YIELD 10. KINOT WIND

EFFECTIVE FALLOUT SHEAR .10 KINOTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-5.53	471.25	8.87	53.65	37174.91	49176.57	305.25
3.00	-5.13	393.98	8.31	42.47	25071.83	26736.55	255.00
10.00	-4.65	316.97	7.66	31.69	15301.58	16007.62	195.00
30.00	-4.18	248.91	7.00	23.36	9000.31	9206.93	155.25
100.00	-3.60	180.11	6.30	15.80	4656.36	4582.22	109.25
300.00	-3.01	126.15	5.57	10.66	2247.41	2120.91	63.00
1000.00	-2.22	71.77	4.20	6.60	826.71	799.16	29.25
3000.00	-1.29	32.30	2.95	4.17	227.22	220.77	8.00
10000.00	.65	6.72	.00	1.56	13.99	17.77	3.00
MAXIMUM DOSE RATE	11126.37						

EFFECTIVE FALLOUT SHEAR .20 KINOTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-5.52	423.77	9.19	92.09	56133.74	62056.40	271.25
3.00	-5.11	350.44	8.61	71.30	36271.45	39822.11	226.00
10.00	-4.64	274.16	7.93	51.53	20701.87	22566.95	181.25
30.00	-4.16	209.46	7.24	36.58	11413.28	12271.24	131.25
100.00	-3.59	145.74	6.41	23.49	5202.61	5509.57	89.25
300.00	-2.98	96.02	5.55	14.65	2265.99	2270.17	55.25
1000.00	-2.19	52.72	4.40	8.18	726.78	705.12	29.25
3000.00	-1.26	24.03	3.01	5.49	183.47	178.49	8.00
10000.00	.80	5.12	.00	1.33	7.93	12.33	3.00
MAXIMUM DOSE RATE	10566.95						

EFFECTIVE FALLOUT SHEAR .40 KINOTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-5.47	377.22	10.36	156.86	84668.26	94792.58	239.25
3.00	-5.07	306.04	9.70	118.65	52085.87	57880.80	195.00
10.00	-4.59	232.95	8.91	82.91	28135.40	30935.30	143.00
30.00	-4.11	172.10	8.13	56.63	14360.15	15673.47	109.25
100.00	-3.52	113.99	7.17	34.42	5930.13	6353.35	71.25
300.00	-2.91	70.81	6.17	20.14	2236.96	2333.83	41.25
1000.00	-2.10	36.09	4.64	10.25	610.69	614.68	19.25
3000.00	-1.12	15.79	3.18	5.10	139.14	135.56	5.25
MAXIMUM DOSE RATE	8955.95						

**CALCULATED FALLOUT CONTOURS
NORTHWEST BIOLOGICAL SOCIETY**

1,000 MERRISON YIELD 20, EAST WIND

EFFECTIVE FALLOUT SPEED .10 KIPTS PER 1000 FT ALTITUDE

1 DOSE RATE (MICROCURIES/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-4.30	847.59	7.62	46.25	57871.51	61839.49	551.25
3.00	-4.04	700.71	7.10	23.89	37758.61	39734.00	440.00
10.00	-3.63	547.92	6.49	26.13	21913.77	22634.36	341.25
30.00	-3.22	410.03	5.60	18.71	12410.82	12379.77	255.00
100.00	-2.72	289.31	3.13	12.31	5891.97	5648.49	160.00
300.00	-2.18	187.33	4.33	8.19	2595.87	2437.83	80.00
1000.00	-1.46	94.33	3.23	4.98	750.72	748.71	35.00
3000.00	-.33	34.68	1.70	2.98	160.94	161.81	5.25
MERRISON DOSE RATE	6182.93						

EFFECTIVE FALLOUT SPEED .20 KIPTS PER 1000 FT ALTITUDE

1 DOSE RATE (MICROCURIES/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-4.30	734.95	7.79	78.30	85184.54	93397.38	483.00
3.00	-4.04	612.79	7.18	59.23	52780.08	57378.74	399.00
10.00	-3.63	458.50	6.56	41.48	29324.49	30634.01	305.25
30.00	-3.22	344.79	5.94	28.35	16755.43	19499.24	209.25
100.00	-2.71	228.31	3.18	17.39	6213.10	6311.62	143.00
300.00	-2.18	141.23	4.37	10.44	1601.98	2352.82	80.00
1000.00	-1.43	69.12	3.28	5.55	654.45	615.15	35.00
3000.00	-.52	27.20	1.79	3.03	134.89	131.89	5.25
MERRISON DOSE RATE	6476.81						

EFFECTIVE FALLOUT SPEED .40 KIPTS PER 1000 FT ALTITUDE

1 DOSE RATE (MICROCURIES/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-4.37	664.59	8.01	131.41	124818.57	130086.06	440.00
3.00	-4.02	527.44	7.47	96.75	73388.06	80786.72	341.25
10.00	-3.61	388.82	6.82	63.16	36835.39	40166.38	255.00
30.00	-3.20	278.39	6.18	42.55	17363.09	18832.38	168.00
100.00	-2.69	173.05	3.30	24.31	6429.69	6785.30	109.25
300.00	-2.19	109.86	4.52	13.61	2158.12	2202.20	55.25
1000.00	-1.42	47.17	3.33	5.35	519.62	500.88	24.00
3000.00	-.47	18.35	1.68	3.18	97.11	94.87	5.25
MERRISON DOSE RATE	6098.43						

**CALCULATED FALLOUT CONTOURS
MAXIMUM BIOLOGICAL DOSE**

1.000 MEGATON YIELD 40. KNOT WIND

EFFECTIVE FALLOUT SHEAR .10 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (MTCMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-3.10	1509.15	6.42	39.47	88658.34	93762.87	960.00
3.00	-2.83	1224.04	5.95	29.99	55556.07	57794.55	783.00
10.00	-2.52	930.60	5.39	21.21	30789.24	31083.35	575.00
30.00	-2.19	685.30	4.82	14.74	16370.85	15917.47	399.00
100.00	-1.79	447.89	4.10	9.46	7138.60	6683.47	224.00
300.00	-1.35	264.92	3.32	5.26	2760.17	2617.79	120.00
1000.00	-.71	105.74	2.16	3.60	636.64	602.43	24.00
3000.00	.34	25.63	.00	1.76	65.04	71.68	5.25
MAX DOSE	3553.28						

EFFECTIVE FALLOUT SHEAR .20 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (MTCMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-3.10	1329.59	6.44	65.78	126445.48	137694.30	889.25
3.00	-2.83	1055.19	5.97	48.47	74736.27	80547.33	675.00
10.00	-2.52	777.68	5.40	32.75	37932.67	40138.33	481.00
30.00	-2.19	552.08	4.83	21.54	18163.77	18752.64	341.25
100.00	-1.79	344.03	4.11	12.62	6915.80	6853.77	195.00
300.00	-1.35	196.01	3.33	7.30	2360.72	2262.22	99.00
1000.00	-.71	83.39	2.16	3.76	537.73	496.93	29.25
3000.00	.35	22.19	.00	1.75	56.89	61.98	5.25
MAX DOSE	3517.09						

EFFECTIVE FALLOUT SHEAR .40 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (MTCMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-3.10	1155.01	6.51	108.59	178941.58	197537.34	755.25
3.00	-2.83	892.99	6.03	77.48	99726.57	109022.71	573.00
10.00	-2.51	633.48	5.46	50.05	48272.91	50004.10	399.00
30.00	-2.19	429.76	4.88	31.21	19933.80	21173.96	271.25
100.00	-1.78	252.07	4.14	16.99	6567.47	6776.33	155.25
300.00	-1.34	136.13	3.36	8.98	1960.78	1939.62	80.00
1000.00	-.71	57.75	2.17	4.14	409.27	380.27	29.25
3000.00	.37	15.96	.00	1.72	48.19	46.04	5.25
MAX DOSE	3474.49						

**CALCULATED FALLOUT CONTINERS
MAXIMUM BIOLOGICAL DOSE**

10,000 LB/ACRE YIELD 0. KNOTS WIND

EFFECTIVE FALLOUT SEPAR .10 SECTS PER 1000 FT ALTITUDE

1 DOSE RATE (MBQ/ACRE/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-29.96	29.93	61.77	62.77	3686.39	3709.39	.00
3.00	-27.34	27.43	59.71	59.71	5149.27	5153.66	.00
10.00	-23.99	25.78	54.13	54.13	4330.67	4339.06	.00
30.00	-24.31	24.29	52.79	52.79	3992.09	4012.61	.00
100.00	-22.44	22.32	48.64	48.64	3416.54	3419.26	.00
300.00	-20.58	20.47	44.60	44.60	2868.15	2876.10	.00
1000.00	-18.32	18.23	39.72	39.72	2378.53	2381.10	.00
3000.00	-15.99	15.90	34.67	34.67	1730.20	1735.93	.00
10000.00	-12.97	12.84	28.11	28.11	1137.29	1139.39	.00
30000.00	-9.39	9.26	20.34	20.34	599.02	596.13	.00
MAXIMUM DOSE RATE	160769.93						

EFFECTIVE FALLOUT SEPAR .20 SECTS PER 1000 FT ALTITUDE

1 DOSE RATE (MBQ/ACRE/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-29.39	29.29	102.84	102.84	9117.05	9131.76	.00
3.00	-25.23	26.72	97.57	97.57	8201.37	8211.51	.00
10.00	-23.17	25.09	91.45	91.45	7194.87	7217.86	.00
30.00	-23.53	23.48	85.49	85.49	6297.45	6311.49	.00
100.00	-21.39	21.45	78.42	78.42	5293.67	5301.25	.00
300.00	-19.64	19.60	71.37	71.37	4367.44	4399.95	.00
1000.00	-17.27	17.14	62.73	62.73	3385.93	3390.98	.00
3000.00	-14.77	14.74	53.69	53.69	2479.45	2489.41	.00
10000.00	-11.43	11.40	41.32	41.32	1468.61	1469.94	.00
30000.00	-7.11	6.99	25.83	25.83	570.73	572.32	.00
MAXIMUM DOSE RATE	60114.90						

EFFECTIVE FALLOUT SEPAR .40 SECTS PER 1000 FT ALTITUDE

1 DOSE RATE (MBQ/ACRE/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-27.47	27.35	188.77	188.77	16236.95	16257.25	.00
3.00	-25.97	25.83	178.49	178.49	14505.53	14531.19	.00
10.00	-24.23	24.21	166.49	166.49	12867.80	12887.44	.00
30.00	-22.52	22.41	154.74	154.74	10909.64	10919.39	.00
100.00	-20.48	20.38	140.73	140.73	9004.88	9032.41	.00
300.00	-18.43	18.34	126.61	126.61	7296.24	7311.63	.00
1000.00	-15.87	15.79	109.04	109.04	5396.99	5421.39	.00
3000.00	-13.11	12.97	90.09	90.09	3684.20	3699.55	.00
10000.00	-9.18	9.05	63.83	63.83	1799.76	1804.89	.00
30000.00	-5.05	4.87	34.19	34.19	68.34	68.98	.00
MAXIMUM DOSE RATE	31737.33						

**CALCULATED FALLOUT CONTOURS
MAXIMUM BIOLOGICAL DOSE**

10,000 MEGATONS YIELD 10. KMOT WIND

EFFECTIVE FALLOUT SHEAR .10 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS/HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-14.71	714.93	23.74	111.63	119215.10	127944.15	461.25
3.00	-13.77	618.82	22.41	91.87	86147.96	91290.55	399.00
10.00	-12.64	516.44	20.85	72.33	57766.93	69116.38	323.00
30.00	-11.58	426.35	19.32	56.55	38221.04	39901.50	271.25
100.00	-10.27	332.31	17.49	41.67	22764.72	22423.16	195.00
300.00	-8.95	251.93	15.63	30.47	13131.11	12484.60	143.00
1000.00	-7.29	171.41	13.29	21.02	6377.23	5900.06	80.00
3000.00	-5.47	104.07	10.73	15.48	2766.45	2713.18	29.25
10000.00	-2.86	43.62	6.91	9.41	673.95	687.13	11.25
30000.00	2.54	7.53	.00	1.80	11.29	28.49	5.25
MAXIMUM DOSE RATE	26924.86						

EFFECTIVE FALLOUT SHEAR .20 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS /HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-14.67	654.57	24.83	195.53	185345.27	205551.31	419.25
3.00	-13.73	560.18	23.43	158.18	129619.45	142600.60	360.00
10.00	-12.62	440.14	21.79	121.47	82947.36	90211.57	288.00
30.00	-11.53	372.94	20.18	92.32	51937.23	55754.94	239.25
100.00	-10.22	283.13	18.25	65.10	28593.36	20001.09	181.25
300.00	-8.89	208.07	16.29	44.93	15049.92	15311.90	131.25
1000.00	-7.22	135.70	13.83	28.14	6476.21	6318.00	71.25
3000.00	-5.39	80.63	11.12	17.73	2484.77	2403.11	35.00
10000.00	-2.73	33.14	7.06	9.90	346.35	327.77	11.25
MAXIMUM DOSE RATE	25516.72						

EFFECTIVE FALLOUT SHEAR .40 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS /HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-14.54	594.86	26.74	341.76	292075.50	327145.42	379.25
3.00	-13.59	502.32	27.10	271.74	197316.45	220211.03	323.00
10.00	-12.47	404.95	25.17	203.73	120410.51	133504.66	255.00
30.00	-11.37	320.86	23.26	150.37	71419.13	76472.05	209.25
100.00	-10.04	235.67	20.99	101.85	36321.50	39311.44	143.00
300.00	-8.64	166.28	18.06	67.03	17384.00	18422.60	99.00
1000.00	-6.98	102.20	15.73	39.01	6347.75	6489.27	35.25
3000.00	-5.09	54.76	12.47	23.32	2183.06	2168.49	29.25
10000.00	-2.30	22.18	7.39	10.99	426.59	422.77	8.00
MAXIMUM DOSE RATE	21508.42						

**CALCULATED FALLOUT CONTOURS
MAXIMUM ENDOCELLULAR DOSE**

10,000 HOURS YIELD 20. HOURS PER 1000 FT ALTITUDE

EFFEKTIVE FALLOUT SINKER .10 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (REM/HR)	2 MAXIMUM UPWARD POSITION	3 MAXIMUM DOWNWARD DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-12.64	1203.06	20.23	68.62	102767.37	204523.24	640.00
3.00	-11.79	1109.03	19.03	79.81	135948.18	141008.58	720.00
10.00	-10.79	919.70	17.64	61.69	62244.84	93159.74	570.00
30.00	-9.79	744.71	16.26	47.27	36206.33	50019.85	461.25
100.00	-8.68	543.94	14.89	33.86	21263.68	32440.10	341.25
300.00	-7.37	411.70	12.89	24.33	17204.64	18914.64	209.25
1000.00	-5.29	251.92	10.72	17.39	7697.31	7399.62	71.25
3000.00	-4.03	142.14	8.23	11.59	2742.69	2601.39	41.25
10000.00	-1.33	42.78	4.10	6.70	449.62	464.47	8.00
MAXIMUM DOSE RATE	17614.49						

EFFEKTIVE FALLOUT SINKER .20 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (REM/HR)	2 MAXIMUM UPWARD POSITION	3 MAXIMUM DOWNWARD DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-12.63	1109.47	20.33	170.48	293429.40	322169.15	783.00
3.00	-11.78	1005.48	19.31	135.54	109104.71	215907.10	649.25
10.00	-10.77	819.81	17.89	101.71	122261.21	131264.14	520.00
30.00	-9.78	642.76	16.49	75.22	73077.80	77898.17	399.00
100.00	-8.58	472.26	14.80	51.24	37711.52	38710.42	289.00
300.00	-7.35	313.25	13.07	34.12	12432.32	12249.53	193.00
1000.00	-5.78	203.57	10.85	20.70	7137.87	6806.08	99.00
3000.00	-4.62	108.69	8.34	12.94	2251.69	2229.84	48.00
10000.00	-1.29	35.44	4.68	6.79	397.04	422.26	8.00
MAXIMUM DOSE RATE	17298.53						

EFFEKTIVE FALLOUT SINKER .40 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (REM/HR)	2 MAXIMUM UPWARD POSITION	3 MAXIMUM DOWNWARD DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-12.59	1073.42	21.68	294.72	452412.97	502768.68	701.25
3.00	-11.73	892.78	20.39	229.58	296806.03	326194.49	575.00
10.00	-10.72	704.37	19.08	167.44	171259.03	180083.54	461.25
30.00	-9.73	543.89	17.38	119.78	93943.60	104164.58	341.25
100.00	-8.52	384.66	15.58	77.74	44904.73	48913.31	239.25
300.00	-7.33	259.24	13.74	48.89	18551.42	20431.66	155.25
1000.00	-5.70	149.09	11.37	27.03	3574.83	6571.32	60.00
3000.00	-3.91	75.77	8.67	14.63	1915.43	1831.83	35.00
10000.00	-1.11	26.62	3.98	7.03	299.75	299.62	8.00
MAXIMUM DOSE RATE	14189.92						

**CALCULATED FALLOUT CURVES
NAKEMO BIOLÓGICAL DOSE**

19,000 MEGACURIE YIELD 40. KILO METER WIND

EFFECTIVE FALLOUT SINK .10 KILO METER PER 1000 FT ALTITUDE

1 DOSE RATE (MICROCURIES/HR)	2 NAKEMO WIND POSITION	3 NAKEMO DISTANT DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 NAKEMO CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO NAKEMO WIDTH
1.00	-9.01	2379.68	17.47	68.18	308771.83	323485.76	1520.00
3.00	-9.19	2008.96	16.38	68.82	211985.83	218156.60	1295.00
10.00	-8.33	1518.40	15.08	52.10	12751.03	133128.32	1025.00
30.00	-7.50	1200.24	13.79	39.08	81305.25	79042.41	783.00
100.00	-6.47	935.23	12.23	27.44	42415.11	43188.97	528.00
300.00	-5.40	649.46	10.60	19.58	21841.23	28144.86	255.00
1000.00	-4.01	373.02	8.47	13.61	8331.92	8830.53	143.00
3000.00	-2.36	154.42	5.88	8.61	2193.48	2120.79	29.25
10000.00	.74	31.92	.88	3.98	179.35	204.07	8.00
NAKEMO DOSE RATE	10114.17						

EFFECTIVE FALLOUT SINK .30 KILO METER PER 1000 FT ALTITUDE

1 DOSE RATE (MICROCURIES/HR)	2 NAKEMO WIND POSITION	3 NAKEMO DISTANT DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 NAKEMO CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO NAKEMO WIDTH
1.00	-9.91	2147.49	17.55	147.43	459216.77	498823.73	1405.25
3.00	-9.19	1785.16	16.64	134.99	301850.91	324274.49	1155.00
10.00	-8.34	1409.17	15.14	84.09	176536.34	187245.87	899.00
30.00	-7.50	1087.74	13.83	60.40	108216.59	103906.28	675.00
100.00	-6.47	768.16	12.28	39.61	48120.86	48202.10	461.25
300.00	-5.40	514.73	10.64	25.50	23823.54	20819.85	288.00
1000.00	-4.00	287.15	8.59	15.17	7327.93	6939.89	143.00
3000.00	-2.35	128.89	5.89	8.83	1952.88	1824.37	41.25
10000.00	.74	29.16	.88	3.96	163.74	186.82	8.00
NAKEMO DOSE RATE	10060.40						

EFFECTIVE FALLOUT SINK .40 KILO METER PER 1000 FT ALTITUDE

1 DOSE RATE (MICROCURIES/HR)	2 NAKEMO WIND POSITION	3 NAKEMO DISTANT DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 NAKEMO CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO NAKEMO WIDTH
1.00	-9.90	1918.78	17.84	251.63	690270.33	782331.51	1259.25
3.00	-9.18	1567.72	16.72	191.68	432340.93	474781.88	1023.00
10.00	-8.33	1205.64	15.39	135.58	237814.57	238343.49	783.00
30.00	-7.49	902.40	14.07	93.62	124615.62	101006.66	575.00
100.00	-6.45	609.71	12.47	57.96	51539.34	54101.80	379.25
300.00	-5.38	389.72	10.88	34.70	21883.81	21451.50	224.00
1000.00	-3.98	205.53	8.61	18.29	6258.24	6070.61	109.25
3000.00	-2.32	94.53	5.84	9.63	1574.61	1484.56	41.25
10000.00	.87	22.83	.88	3.85	127.81	143.88	8.00
NAKEMO DOSE RATE	8853.59						

**CALCULATED FALLOUT CONTOURS
MAXIMUM BIOLOGICAL DOSE**

100,000 HEMLOCK YIELD : . KNOT WIND

EFFECTIVE FALLOUT SHEAR .10 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (REM/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALF-DEPTH AT ORIGIN	5 MAXIMUM CROSSWIND HALF-DEPTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-53.99	53.92	112.93	112.93	19121.92	19142.21	.00
3.00	-51.61	51.48	107.94	107.94	17460.84	17478.05	.00
10.00	-48.86	48.80	102.19	102.19	15624.24	15676.80	.00
30.00	-46.21	46.11	96.65	96.65	14000.30	14014.60	.00
100.00	-43.12	43.01	90.18	90.18	12177.62	12201.02	.00
300.00	-40.09	40.01	83.85	83.85	10536.45	10549.75	.00
1000.00	-36.48	36.39	76.31	76.31	8713.29	8734.34	.00
3000.00	-32.80	32.73	68.71	68.71	7069.23	7077.11	.00
10000.00	-28.36	28.26	59.27	59.27	5260.29	5268.88	.00
30000.00	-23.47	23.42	49.09	49.09	3608.47	3616.31	.00
MAXIMUM DOSE RATE	331497.11						

EFFECTIVE FALLOUT SHEAR .20 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (REM/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALF-DEPTH AT ORIGIN	5 MAXIMUM CROSSWIND HALF-DEPTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-53.23	53.13	159.11	159.11	26556.66	26581.51	.00
3.00	-50.81	50.69	151.87	151.87	24191.92	24212.23	.00
10.00	-48.01	48.01	143.52	143.52	21470.53	21667.88	.00
30.00	-45.31	45.19	135.45	135.45	19237.62	19255.99	.00
100.00	-42.16	42.10	126.01	126.01	16829.14	16877.31	.00
300.00	-39.05	38.94	116.74	116.74	14286.80	14301.59	.00
1000.00	-35.36	35.32	103.65	103.65	11656.64	11725.63	.00
3000.00	-31.50	31.45	94.39	94.39	9331.71	9345.60	.00
10000.00	-26.85	26.72	80.27	80.27	6746.48	6754.82	.00
30000.00	-21.66	21.53	64.74	64.74	4365.56	4391.70	.00
MAXIMUM DOSE RATE	231649.15						

EFFECTIVE FALLOUT SHEAR .40 KNOTS PER 1000 FT ALTITUDE

1 DOSE RATE (REM/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALF-DEPTH AT ORIGIN	5 MAXIMUM CROSSWIND HALF-DEPTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-52.02	51.89	271.18	271.18	44220.44	44251.06	.00
3.00	-47.54	47.45	256.25	256.25	40063.46	40153.68	.00
10.00	-46.67	46.58	243.28	243.28	35595.10	35634.97	.00
30.00	-43.88	43.76	228.78	228.78	31453.82	31495.79	.00
100.00	-40.61	40.57	211.74	211.74	26961.83	27001.64	.00
300.00	-37.38	37.26	194.90	194.90	22820.10	22853.70	.00
1000.00	-33.49	33.39	174.59	174.59	18318.47	18341.13	.00
3000.00	-29.49	29.47	153.73	153.73	14132.88	14237.05	.00
10000.00	-24.36	24.33	127.00	127.00	9443.64	9713.14	.00
30000.00	-18.48	18.40	96.34	96.34	5569.23	5581.42	.00
MAXIMUM DOSE RATE	132995.46						

**CALCULATED FALLOUT CONTOURS
MAXIMUM ESTIMATED DOSE**

100,000 MEGACURIE YIELD 10. KMPT WIND

EFFECTIVE FALLOUT SHEAR .10 KIUPS PER 1000 FT ALTITUDE

1 DOSE RATE (MREMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-26.57	990.49	64.34	198.49	305428.68	322245.70	624.00
3.00	-26.47	878.99	61.00	169.32	234930.45	242943.75	551.25
10.00	-26.02	750.81	57.28	139.79	171190.23	173849.82	483.00
30.00	-29.64	651.54	53.58	115.39	124325.45	123464.90	399.00
100.00	-26.01	537.22	49.21	91.43	84073.18	81008.13	323.00
300.00	-23.99	436.49	44.84	72.45	54030.86	52400.29	239.25
1000.00	-20.33	331.03	39.53	55.21	33438.44	30487.77	155.25
3000.00	-16.91	240.11	33.95	45.59	18940.55	18403.07	29.25
10000.00	-12.12	147.13	26.53	35.00	8417.38	8754.25	24.00
30000.00	-6.31	68.67	17.14	22.64	2535.16	2666.81	15.00
MAXIMUM DOSE RATE	60367.94						

EFFECTIVE FALLOUT SHEAR .20 KIUPS PER 1000 FT ALTITUDE

1 DOSE RATE (MREMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-36.40	921.12	67.23	351.79	479705.63	529171.93	599.25
3.00	-34.38	810.92	63.80	295.60	354690.68	392429.39	528.00
10.00	-31.93	692.73	59.82	239.19	252558.46	272262.18	460.00
30.00	-29.53	587.77	55.94	192.53	175072.06	186684.12	379.25
100.00	-26.70	478.73	51.34	147.15	111542.78	116369.84	305.25
300.00	-23.85	381.10	46.76	111.36	69374.97	70661.75	224.00
1000.00	-20.39	280.88	41.16	78.60	36032.27	37384.07	148.00
3000.00	-16.74	198.06	35.29	53.11	19671.77	18593.15	99.00
10000.00	-11.91	117.79	27.43	37.71	7891.55	7683.65	29.25
30000.00	-6.02	54.87	17.42	23.40	2203.66	2238.01	15.00
MAXIMUM DOSE RATE	66208.74						

EFFECTIVE FALLOUT SHEAR .40 KIUPS PER 1000 FT ALTITUDE

1 DOSE RATE (MREMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-36.20	851.70	77.82	627.67	776449.37	875416.16	551.25
3.00	-34.08	742.94	73.60	520.60	565271.21	634113.15	483.00
10.00	-31.61	626.70	68.93	413.76	383351.63	427851.30	399.00
30.00	-29.19	524.04	64.38	326.25	256677.22	283512.92	341.25
100.00	-26.32	416.32	58.99	242.23	154621.09	166422.64	255.00
300.00	-23.45	323.70	53.39	178.96	89453.98	94448.68	195.00
1000.00	-19.92	230.51	46.97	118.36	44909.68	46539.15	143.00
3000.00	-16.70	153.23	39.99	77.31	20883.84	20821.41	89.25
10000.00	-11.22	86.46	30.56	45.86	7229.64	7036.21	35.00
30000.00	-5.60	37.30	18.07	25.08	1868.38	1866.44	15.00
MAXIMUM DOSE RATE	54671.41						

**COLLECTED FALLOUT GEOMETRIES
WINDMILL ECOSYSTEMAL LOGS**

150.00 WINDMILL YIELD 20. FEET WIND

REPRESENTATIVE FALLOUT GEOM. .10 HOURS PER 1000 FT ALTITUDE

1 WIND RATE (MILES/HOUR/HR)	2 WINDMILL YIELD PERCENTAGE	3 WINDMILL DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GEOMET.	5 WINDMILL CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO WINDMILL WIDTH
1.00	-33.00	1841.33	53.00	178.99	910783.13	100263.76	1189.25
3.00	-31.31	1419.27	50.30	151.06	100504.00	391807.72	1023.00
10.00	-29.01	1233.02	47.07	123.10	274531.38	273017.04	869.25
30.00	-26.75	1172.12	43.90	100.10	194496.07	188652.37	701.25
100.00	-24.07	940.53	40.15	78.14	123980.66	119375.02	551.25
300.00	-21.37	752.96	36.39	61.11	81328.32	74320.56	399.00
1000.00	-19.69	549.93	31.77	48.17	45767.85	42976.54	271.25
3000.00	-16.54	376.63	26.87	39.31	23869.47	24156.76	171.25
10000.00	-9.79	230.56	20.17	26.92	8712.60	8094.91	108.00
30000.00	-3.72	62.25	10.92	14.10	1641.50	1676.91	15.00
WINDMILL GROSS RATE	50735.03						

REPRESENTATIVE FALLOUT GEOM. .20 HOURS PER 1000 FT ALTITUDE

1 WIND RATE (MILES/HOUR/HR)	2 WINDMILL YIELD PERCENTAGE	3 WINDMILL DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GEOMET.	5 WINDMILL CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO WINDMILL WIDTH
1.00	-33.00	1784.02	53.94	320.00	700296.41	606740.13	1121.25
3.00	-31.33	1406.32	51.11	260.00	575139.25	600092.65	960.00
10.00	-29.97	1233.77	47.81	207.17	392150.23	487429.35	811.25
30.00	-26.71	1048.43	44.59	163.63	264100.68	376427.06	675.00
100.00	-24.03	833.09	40.78	122.07	161021.76	164127.65	528.00
300.00	-21.33	647.63	36.93	69.94	95548.14	94512.69	399.00
1000.00	-19.66	460.43	32.24	61.61	48756.23	46298.27	255.00
3000.00	-14.48	307.80	27.24	42.64	23131.84	21587.90	120.00
10000.00	-9.71	163.33	20.40	28.11	7848.03	7639.59	55.25
30000.00	-3.61	54.64	10.90	15.26	1516.96	1519.78	15.00
WINDMILL GROSS RATE	49313.43						

REPRESENTATIVE FALLOUT GEOM. .40 HOURS PER 1000 FT ALTITUDE

1 WIND RATE (MILES/HOUR/HR)	2 WINDMILL YIELD PERCENTAGE	3 WINDMILL DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GEOMET.	5 WINDMILL CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO WINDMILL WIDTH
1.00	-33.15	1566.89	57.23	555.24	1252282.81	1395519.10	1023.00
3.00	-31.17	1332.60	54.21	453.66	809654.83	986089.96	869.25
10.00	-28.85	1124.74	50.69	353.44	501590.17	640649.32	728.00
30.00	-26.58	924.96	47.25	272.52	373941.61	407333.35	599.25
100.00	-23.08	717.61	43.17	196.20	213143.96	228520.11	461.25
300.00	-21.17	542.23	39.08	138.42	116772.17	122500.94	341.25
1000.00	-17.82	370.00	34.03	88.54	53286.20	52950.30	224.00
3000.00	-14.26	235.32	29.66	55.45	22426.46	21624.81	131.25
10000.00	-9.42	119.69	21.27	31.58	6475.79	6404.52	88.00
30000.00	-3.16	43.90	10.73	16.67	1231.31	1232.03	15.00
WINDMILL GROSS RATE	46454.77						

**CALCULATED FALLOUT CONTOURS
NORTHERN BIOLOGICAL DOSE**

100,000 PERSONS YIELD 40. FEET WIND

EFFECTIVE FALLOUT SHEAR .10 KIPTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS/HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIND
1.00	-28.54	3404.79	43.64	160.38	849210.75	826946.75	2161.25
3.00	-26.76	2948.19	43.14	133.91	630102.24	629976.46	1848.00
10.00	-24.68	2500.98	40.22	107.69	437807.36	427206.45	1520.00
30.00	-22.63	2087.53	37.36	86.47	302005.87	286636.36	1259.25
100.00	-20.19	1651.74	33.93	66.49	189974.27	174619.06	899.00
300.00	-17.72	1273.39	30.30	51.74	116311.29	104933.12	575.00
1000.00	-14.64	893.88	26.21	42.33	60763.32	59740.77	168.00
3000.00	-11.31	593.31	21.56	32.09	27910.97	26472.05	153.25
10000.00	-6.65	222.98	14.89	20.23	7174.13	7290.46	35.00
30000.00	.02	53.09	.00	10.32	815.99	880.68	15.00
MAXIMUM DOSE RATE	32599.15						

EFFECTIVE FALLOUT SHEAR .20 KIPTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS/HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIND
1.00	-28.53	3134.35	43.87	279.32	1282999.06	1 52744.96	2024.00
3.00	-26.75	2705.52	43.26	227.73	916245.15	977392.43	1761.00
10.00	-24.67	2249.50	40.42	177.92	601848.51	635548.38	1443.00
30.00	-22.62	1849.39	37.56	137.81	391890.68	405238.46	1155.00
100.00	-20.18	1433.53	34.11	100.15	229345.00	228406.94	869.25
300.00	-17.70	1089.16	30.65	71.89	128916.39	124817.81	624.00
1000.00	-14.63	730.81	26.33	48.14	60713.51	56373.57	360.00
3000.00	-11.30	492.19	21.65	34.10	25755.66	24822.53	155.25
10000.00	-6.62	191.93	14.93	20.52	6531.41	6401.28	41.25
30000.00	.08	50.20	.00	10.29	771.57	812.68	15.00
MAXIMUM DOSE RATE	32413.28						

EFFECTIVE FALLOUT SHEAR .40 KIPTS PER 1000 FT ALTITUDE

1 DOSE RATE (ROENTGENS/HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIND
1.00	-28.50	2864.36	46.78	487.29	2003422.81	2214316.87	1848.00
3.00	-26.72	2443.43	44.21	391.91	1304845.97	1500635.64	1599.00
10.00	-24.63	1998.52	41.21	298.81	872542.51	940618.03	1295.00
30.00	-22.59	1611.79	38.27	224.86	536810.00	577230.04	1023.00
100.00	-20.13	1213.39	34.76	156.58	288389.21	282800.98	735.25
300.00	-17.65	886.84	31.22	106.49	147520.19	151006.94	551.25
1000.00	-14.55	574.04	25.89	65.19	61280.33	60271.78	323.00
3000.00	-11.22	341.23	22.01	39.91	23009.77	23004.23	160.00
10000.00	-6.53	147.64	15.19	21.65	5573.31	5243.05	40.00
30000.00	.32	42.25	.00	10.15	642.48	678.87	15.00
MAXIMUM DOSE RATE	31780.34						

**CALCULATED FALLOUT CURVES
1-1 BASE RATE CURVES**

1.000 INCHES PER 1000 FT ALTITUDE

EFFORTIVE FALLOUT CURVE .10 INCHES PER 1000 FT ALTITUDE

1 BASE RATE (INCHES/1000 FT)	2 MAXIMUM DOWN FALLING	3 MAXIMUM DOWNFALL DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-14.97	14.97	33.03	33.26	1537.97	1564.35	.00
3.00	-14.09	13.99	31.39	31.30	1377.40	1300.62	.00
10.00	-13.03	12.92	29.00	29.00	1181.02	1103.10	.00
30.00	-12.00	11.94	25.73	26.73	1001.20	1005.38	.00
100.00	-10.00	10.73	23.99	23.99	808.24	811.34	.00
300.00	-9.34	9.40	21.19	21.19	620.90	630.17	.00
1000.00	-7.93	7.91	17.61	17.61	434.95	439.03	.00
3000.00	-6.10	5.97	13.54	13.54	253.63	256.76	.00
10000.00	-3.01	3.00	6.68	6.68	58.86	63.05	.00
MAXIMUM BASE RATE	14723.05						

EFFORTIVE FALLOUT CURVE .20 INCHES PER 1000 FT ALTITUDE

1 BASE RATE (INCHES/1000 FT)	2 MAXIMUM DOWN FALLING	3 MAXIMUM DOWNFALL DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-16.50	16.44	50.56	50.56	2653.83	2561.83	.00
3.00	-13.33	13.46	34.87	34.87	2127.00	2331.04	.00
10.00	-12.51	12.39	30.52	30.52	1970.03	1975.54	.00
30.00	-11.46	11.41	26.19	26.19	1635.32	1657.55	.00
100.00	-10.13	10.01	23.92	23.92	1291.66	1274.54	.00
300.00	-8.77	8.37	20.44	20.44	956.22	971.21	.00
1000.00	-6.99	6.95	16.23	16.23	612.40	616.10	.00
3000.00	-4.52	4.72	10.43	10.43	289.30	291.43	.00
MAXIMUM BASE RATE	6097.03						

EFFORTIVE FALLOUT CURVE .40 INCHES PER 1000 FT ALTITUDE

1 BASE RATE (INCHES/1000 FT)	2 MAXIMUM DOWN FALLING	3 MAXIMUM DOWNFALL DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-13.63	13.63	100.71	100.71	4700.18	4700.17	.00
3.00	-13.00	12.87	102.22	102.22	4145.80	4153.30	.00
10.00	-11.67	11.79	93.33	93.33	3445.69	3449.20	.00
30.00	-10.73	10.66	84.40	84.40	2808.04	2820.33	.00
100.00	-9.33	9.20	73.30	73.30	2130.04	2125.90	.00
300.00	-7.94	7.81	61.63	61.63	1504.30	1514.24	.00
1000.00	-5.77	5.68	45.37	45.37	809.12	814.31	.00
3000.00	-3.75	3.60	21.73	21.73	182.40	185.70	.00
MAXIMUM BASE RATE	4130.94						

**CALCULATED FALLOUT CONTOURS
N+1 BOMB RATE CONTOURS**

1,000 MEGATON YIELD 10. KNOT WIND

EFFECTIVE FALLOUT SINKER .10 KILOTS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOTONS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-5.11	490.00	0.29	34.96	39335.32	42746.09	323.00
3.00	-4.60	410.17	7.69	43.04	26133.00	28043.37	271.25
10.00	-4.16	325.58	6.97	31.37	15409.54	16324.13	209.25
30.00	-3.64	251.96	6.26	22.61	8034.07	9077.99	155.25
100.00	-2.99	176.67	5.33	14.61	4173.43	4121.72	109.25
300.00	-2.26	114.63	4.34	9.09	1758.36	1660.10	63.00
1000.00	-1.25	55.43	2.60	4.69	433.07	433.42	26.00
3000.00	.42	12.93	.60	2.00	38.39	41.96	3.00
MAXIMUM BOMB RATE	3466.26						

EFFECTIVE FALLOUT SINKER .20 KILOTS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOTONS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-5.10	439.67	0.29	93.50	59135.09	65599.67	208.00
3.00	-4.64	361.47	7.96	71.67	37139.32	41239.89	239.25
10.00	-4.14	279.37	7.21	50.63	20648.70	22548.25	181.25
30.00	-3.62	209.91	6.45	34.50	10770.37	11946.34	131.25
100.00	-2.96	139.84	5.51	20.70	4438.25	4611.09	89.25
300.00	-2.24	84.02	4.47	11.64	1570.60	1577.73	48.00
1000.00	-1.21	36.97	2.93	5.32	318.29	319.04	19.25
3000.00	.53	8.92	.60	1.91	24.12	28.43	3.00
MAXIMUM BOMB RATE	3431.93						

EFFECTIVE FALLOUT SINKER .40 KILOTS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOTONS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-5.05	390.13	9.67	130.79	63177.50	68565.81	235.00
3.00	-4.61	313.61	8.93	117.76	32991.19	36061.89	269.25
10.00	-4.09	234.56	8.09	79.79	27193.75	29494.54	231.25
30.00	-3.23	167.60	7.22	51.70	12743.63	13722.82	180.25
100.00	-2.63	103.92	6.19	28.68	4593.58	4859.83	63.00
300.00	-2.24	57.15	4.92	14.53	1315.46	1335.32	33.00
1000.00	-1.07	22.50	3.09	9.60	218.44	218.60	11.25
3000.00	1.29	3.92	.60	1.65	4.13	6.69	3.00
MAXIMUM BOMB RATE	2931.00						

**CHICAGO FALLS POWER PLANT
101 HOUR RATE CHARGES**

1.00 HOURS PER 1000 FT ALTIMETER

RESERVE FALLBACK CHARGE .10 HOURS PER 1000 FT ALTIMETER

1 RATE (RESERVE/HOUR)	2 MINIMUM WIND RESERVE	3 MINIMUM RESERVE RESERVE	4 CROSSWIND RESERVE AT CHARGE	5 MINIMUM CROSSWIND RESERVE	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MINIMUM WIND
1.00	-4.01	879.23	7.05	47.19	39729.26	63349.14	575.00
3.00	-3.01	721.04	6.51	36.05	36601.61	41134.55	461.25
10.00	-2.19	528.05	5.83	23.38	21708.04	22551.34	360.00
15.00	-2.73	415.51	5.24	17.54	11572.22	11613.36	295.00
100.00	-2.14	274.52	4.26	10.82	4997.12	4702.36	195.25
100.00	-1.47	163.67	3.26	6.49	1739.37	1653.05	63.00
1000.00	-.43	51.62	1.32	3.01	264.44	293.67	15.00
MINIMUM RATE	2007.37						

RESERVE FALLBACK CHARGE .20 HOURS PER 1000 FT ALTIMETER

1 RATE (RESERVE/HOUR)	2 MINIMUM WIND RESERVE	3 MINIMUM RESERVE RESERVE	4 CROSSWIND RESERVE AT CHARGE	5 MINIMUM CROSSWIND RESERVE	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MINIMUM WIND
1.00	-4.01	708.98	7.14	70.29	60007.11	97897.10	505.25
3.00	-3.01	627.00	6.57	30.77	26607.40	36315.92	390.00
10.00	-2.19	459.97	5.89	30.83	27438.10	30504.78	305.25
15.00	-2.73	368.00	5.19	23.60	13002.99	13774.29	230.25
100.00	-2.14	297.97	4.20	14.41	6036.19	6747.67	131.25
100.00	-1.46	182.29	3.20	7.31	1320.26	1343.49	63.00
1000.00	-.42	37.60	1.31	3.07	185.91	189.69	11.25
MINIMUM RATE	2004.72						

RESERVE FALLBACK CHARGE .40 HOURS PER 1000 FT ALTIMETER

1 RATE (RESERVE/HOUR)	2 MINIMUM WIND RESERVE	3 MINIMUM RESERVE RESERVE	4 CROSSWIND RESERVE AT CHARGE	5 MINIMUM CROSSWIND RESERVE	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MINIMUM WIND
1.00	-4.00	643.03	7.42	131.37	127321.49	142147.79	440.00
3.00	-3.02	315.00	6.83	54.42	72615.40	83001.67	341.25
10.00	-2.17	264.49	6.12	60.75	12011.39	37009.00	239.25
15.00	-2.70	269.60	5.39	37.03	14021.95	17329.93	168.00
100.00	-2.11	147.46	4.43	19.79	4218.03	4411.54	89.25
100.00	-1.43	71.62	3.28	8.67	904.60	997.65	41.25
1000.00	-.37	22.59	1.47	3.10	119.93	114.33	8.00
MINIMUM RATE	1207.43						

**CALCULATED FALLOUT CONTOURS
D-1 BOMB BOMB ORANGE**

1.000 BOMBING YIELD 40. FOOT WIND

EFFECTIVE FALLOUT BEAR .10 BOMBS PER 1000 FT ALTITUDE

1 BOMB RATE (BOMBINGS/HR)	2 MINIMUM WINDS POSITIONS	3 MAXIMUM BOMBING RANGE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-2.81	1569.21	3.91	39.87	91789.93	97831.99	1023.00
3.00	-2.52	1254.39	3.39	29.72	36113.23	58802.32	811.25
10.00	-2.15	916.10	4.76	29.30	29467.10	39924.00	599.25
30.00	-1.79	646.73	4.11	13.40	14401.63	14076.30	399.00
100.00	-1.39	461.84	3.34	7.62	5277.94	4761.85	209.25
300.00	-.72	193.78	2.17	4.26	1382.33	1382.19	80.00
1000.00	.49	39.74	.89	1.57	68.34	76.78	3.25
MAXIMUM BOMB RATE	1877.68						

EFFECTIVE FALLOUT BEAR .20 BOMBS PER 1000 FT ALTITUDE

1 BOMB RATE (BOMBINGS/HR)	2 MINIMUM WINDS POSITIONS	3 MAXIMUM BOMBING RANGE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-2.81	1347.74	3.92	65.00	120462.13	143042.82	879.00
3.00	-2.52	1071.65	3.41	47.27	73664.13	79716.40	701.25
10.00	-2.16	769.69	4.78	30.32	34025.74	36037.71	483.00
30.00	-1.79	529.20	4.12	18.70	16973.03	15709.24	323.00
100.00	-1.39	391.25	3.25	9.64	4494.40	4637.79	168.00
300.00	-.72	170.62	2.17	4.54	1885.34	937.07	63.00
1000.00	.49	34.36	.89	1.25	33.90	60.61	3.25
MAXIMUM BOMB RATE	1872.77						

EFFECTIVE FALLOUT BEAR .40 BOMBS PER 1000 FT ALTITUDE

1 BOMB RATE (BOMBINGS/HR)	2 MINIMUM WINDS POSITIONS	3 MAXIMUM BOMBING RANGE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-2.81	1179.73	3.99	107.09	179983.99	198934.76	735.25
3.00	-2.51	894.97	3.47	73.87	94082.67	104141.22	575.00
10.00	-2.16	619.12	4.80	44.79	39797.71	42079.00	399.00
30.00	-1.79	395.99	4.16	25.37	14572.00	14495.21	239.25
100.00	-1.39	195.22	3.29	12.64	3312.47	3594.23	120.00
300.00	-.71	81.73	2.19	4.89	648.68	633.66	41.25
1000.00	.52	15.49	.89	1.49	32.46	37.35	3.25
MAXIMUM BOMB RATE	1893.78						

**CALCULATED FALLOUT CONTOURS
W-1 BOMB RATE CONTOURS**

10,000 KILOGRAM YIELD 0 KNOT WIND

EFFECTIVE FALLOUT SPEED .10 KNOTS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-28.02	27.93	60.74	60.74	5331.14	5338.89	.00
3.00	-26.56	26.43	57.57	57.57	4785.07	4791.43	.00
10.00	-24.83	24.78	53.87	53.87	4182.71	4200.32	.00
30.00	-23.19	23.11	50.28	50.26	3648.91	3633.84	.00
100.00	-21.21	21.09	45.99	45.99	3050.48	3055.69	.00
300.00	-19.24	19.24	41.70	41.70	2511.74	2520.12	.00
1000.00	-16.81	16.68	36.43	36.43	1912.53	1916.00	.00
3000.00	-14.23	14.14	30.84	30.84	1371.09	1374.93	.00
10000.00	-10.72	10.64	23.23	23.23	776.40	779.17	.00
MAXIMUM BOMB RATE	48420.16	3.60	12.80	12.80	233.70	235.24	.00

EFFECTIVE FALLOUT SPEED .20 KNOTS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-27.34	27.22	99.36	99.36	8505.96	8516.40	.00
3.00	-25.84	25.72	93.89	93.89	7590.19	7605.77	.00
10.00	-24.08	24.08	87.51	87.51	6550.36	6620.55	.00
30.00	-22.36	22.24	81.26	81.26	5685.83	5693.71	.00
100.00	-20.31	20.22	73.79	73.79	4680.96	4697.79	.00
300.00	-18.23	18.14	66.26	66.26	3778.13	3785.36	.00
1000.00	-15.65	15.58	56.86	56.86	2772.46	2780.79	.00
3000.00	-12.64	12.71	46.65	46.65	1868.59	1872.35	.00
10000.00	-8.79	8.69	31.93	31.93	871.92	875.41	.00
MAXIMUM BOMB RATE	29825.35						

EFFECTIVE FALLOUT SPEED .40 KNOTS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-26.48	26.35	181.98	181.98	15082.36	15102.96	.00
3.00	-24.93	24.83	171.29	171.29	13340.57	13393.11	.00
10.00	-23.10	23.02	158.75	158.75	11480.40	11501.33	.00
30.00	-21.20	21.17	146.37	146.37	9749.43	9765.37	.00
100.00	-19.13	19.12	131.48	131.48	7874.98	7899.81	.00
300.00	-16.91	16.78	116.23	116.23	6141.97	6152.41	.00
1000.00	-14.07	13.99	96.80	96.80	4259.47	4269.18	.00
3000.00	-10.88	10.83	74.80	74.80	2549.82	2551.25	.00
10000.00	-5.55	5.50	38.16	38.16	652.52	662.28	.00
MAXIMUM BOMB RATE	19273.69						

**CALCULATED FALLOUT CONTROLS
SEA ROSE RATE CONTROLS**

20,000 MINIMUM FIELD 10. INCH WIND

EFFECTIVE FALLOUT SLOPE .10 INCHES PER 1000 FT ALTITUDE

1 ROSE RATE (CENTIGRADES/HR)	2 MINIMUM WINDS FOURTHS	3 MAXIMUM DEPARTURE DEVIANCE	4 CALCULATED HALFWIDTH AT GROUND	5 MINIMUM CALCULATED HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MINIMUM WINDS
1.00	-13.64	751.34	23.51	110.66	129672.92	140226.74	483.00
3.00	-12.64	639.39	21.10	95.63	92119.35	96689.69	419.25
10.00	-11.66	641.92	19.64	75.60	61858.23	64949.43	341.25
30.00	-10.49	443.71	17.70	37.60	40237.04	41336.00	288.00
100.00	-9.93	244.28	15.77	41.60	23186.23	23021.63	209.25
300.00	-7.57	236.28	13.68	29.33	12456.30	12133.99	143.00
1000.00	-5.82	146.71	10.93	18.32	5329.83	5121.84	83.00
3000.00	-3.34	111.88	7.63	12.21	1869.88	1825.92	29.25
10000.00	1.04	19.41	.94	4.51	116.23	137.74	8.00
MINIMUM ROSE RATE	10000.65						

EFFECTIVE FALLOUT SLOPE .20 INCHES PER 1000 FT ALTITUDE

1 ROSE RATE (CENTIGRADES/HR)	2 MINIMUM WINDS FOURTHS	3 MAXIMUM DEPARTURE DEVIANCE	4 CALCULATED HALFWIDTH AT GROUND	5 MINIMUM CALCULATED HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MINIMUM WINDS
1.00	-13.60	687.91	23.50	206.00	207493.41	224963.29	440.00
3.00	-12.60	598.37	22.06	164.25	147423.42	159009.34	379.25
10.00	-11.61	481.83	20.31	124.92	88308.93	94817.83	303.25
30.00	-10.43	389.14	18.57	93.39	54311.92	57667.73	259.00
100.00	-9.99	259.47	16.43	64.07	28313.13	28137.25	191.25
300.00	-7.58	267.73	14.25	42.24	13989.61	14282.96	131.25
1000.00	-5.24	127.82	11.29	26.30	5191.11	5029.68	71.25
3000.00	-3.12	63.66	7.82	13.37	1677.96	1623.24	29.25
10000.00	1.57	13.29	.60	3.93	72.73	92.97	8.00
MINIMUM ROSE RATE	10011.62						

EFFECTIVE FALLOUT SLOPE .40 INCHES PER 1000 FT ALTITUDE

1 ROSE RATE (CENTIGRADES/HR)	2 MINIMUM WINDS FOURTHS	3 MAXIMUM DEPARTURE DEVIANCE	4 CALCULATED HALFWIDTH AT GROUND	5 MINIMUM CALCULATED HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MINIMUM WINDS
1.00	-13.66	626.93	27.22	219.77	317143.69	326275.12	399.00
3.00	-12.45	526.79	23.48	188.99	222709.95	230213.92	361.25
10.00	-11.43	422.60	23.41	207.85	137259.91	141719.43	271.25
30.00	-10.26	331.64	21.25	159.23	73192.40	68409.35	209.25
100.00	-8.00	219.23	18.83	97.79	38910.50	37043.37	139.25
300.00	-7.27	161.36	16.22	60.50	18133.92	16024.21	99.00
1000.00	-5.23	99.04	12.74	31.29	4811.62	4682.59	48.00
3000.00	-3.02	40.39	8.32	14.93	1042.59	1010.69	19.25
MINIMUM ROSE RATE	10043.95						

**CALCULATED FALLOUT COSTS
B-1 BOMB DOME CONTROLS**

10,000 KILOGRAMS YIELD 20. KILOM WIND

EFFUSIVE FALLOUT GEAR .10 KILOPS PER 1000 FT ALTITUDE

1	2	3	4	5	6	7	8
BOMB RATE (KILOGRAMS/HR)	MAXIMUM DOWNWARD POSITION	MAXIMUM DOWNWARD DISTANCE	CROSSWIND HALFWIDTH AT GROUND	MAXIMUM CROSSWIND HALFWIDTH	ACTUAL AREA	ESTIMATED AREA ELLIPSE	RANGE TO MAXIMUM WIDTH
1.00	-11.78	1373.51	19.00	102.60	209316.22	223509.64	899.00
3.00	-10.05	1175.95	17.72	82.75	166467.09	156270.42	755.25
10.00	-9.78	952.71	15.21	63.22	93323.63	86371.10	624.00
30.00	-8.67	774.61	14.79	47.63	58295.20	58627.90	483.00
100.00	-7.33	577.87	12.84	33.19	31457.59	30302.69	341.25
300.00	-5.91	409.66	10.05	22.61	15018.43	14761.28	224.00
1000.00	-3.99	240.44	8.15	14.48	5797.01	5540.31	71.25
3000.00	-1.54	95.27	4.66	7.79	1199.39	1184.84	24.00
MAXIMUM BOMB RATE	3777.60						

EFFUSIVE FALLOUT GEAR .20 KILOPS PER 1000 FT ALTITUDE

1	2	3	4	5	6	7	8
BOMB RATE (KILOGRAMS/HR)	MAXIMUM DOWNWARD POSITION	MAXIMUM DOWNWARD DISTANCE	CROSSWIND HALFWIDTH AT GROUND	MAXIMUM CROSSWIND HALFWIDTH	ACTUAL AREA	ESTIMATED AREA ELLIPSE	RANGE TO MAXIMUM WIDTH
1.00	-11.75	1250.35	19.28	177.44	319399.47	351777.42	611.25
3.00	-10.04	1054.03	17.99	139.96	216190.21	234126.81	675.00
10.00	-9.75	845.71	16.44	103.62	120017.33	129239.73	551.25
30.00	-8.66	663.78	14.90	75.00	74573.29	79216.36	419.25
100.00	-7.31	478.99	13.01	49.01	36131.37	37277.21	305.25
300.00	-5.88	322.32	11.00	30.60	15099.34	15777.83	195.00
1000.00	-3.96	175.91	8.25	16.45	4889.40	4673.23	89.25
3000.00	-1.50	68.00	4.45	7.99	923.92	873.46	24.00
MAXIMUM BOMB RATE	3674.10						

EFFUSIVE FALLOUT GEAR .40 KILOPS PER 1000 FT ALTITUDE

1	2	3	4	5	6	7	8
BOMB RATE (KILOGRAMS/HR)	MAXIMUM DOWNWARD POSITION	MAXIMUM DOWNWARD DISTANCE	CROSSWIND HALFWIDTH AT GROUND	MAXIMUM CROSSWIND HALFWIDTH	ACTUAL AREA	ESTIMATED AREA ELLIPSE	RANGE TO MAXIMUM WIDTH
1.00	-11.70	1125.31	20.25	305.50	489455.66	546119.85	720.00
3.00	-10.73	933.67	18.97	235.56	314633.19	349466.50	599.25
10.00	-9.69	730.66	17.34	168.39	177825.02	193066.89	483.00
30.00	-8.60	555.61	15.79	117.34	95170.74	103013.05	360.00
100.00	-7.24	379.70	13.63	71.80	40749.23	42627.10	239.25
300.00	-5.69	249.11	11.53	41.39	15361.39	15833.44	143.00
1000.00	-3.63	119.91	8.38	20.46	3097.97	3738.64	63.00
3000.00	-1.33	43.70	4.40	8.35	619.12	591.65	19.00
MAXIMUM BOMB RATE	3300.21						

**CALCULATED FALLOUT CURVES
N+1 HOUR BOMB CURVES**

10,000 KILOGRAMS YIELD 40. KILOMETER WIND

EFFECTIVE FALLOUT SHEAR .10 KILOMETERS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-9.16	2499.19	16.29	89.53	333475.99	332776.45	1599.00
3.00	-8.36	2103.91	15.11	79.92	236642.15	233337.25	1368.00
10.00	-7.44	1487.76	13.69	52.89	118046.61	140830.60	1055.25
30.00	-6.50	1321.57	12.26	38.75	82221.33	88843.14	811.25
100.00	-5.32	942.72	10.47	26.02	41687.50	38753.68	528.00
300.00	-4.04	623.13	8.91	17.27	18485.38	17015.20	271.25
1000.00	-2.21	301.44	5.64	9.98	4667.14	4758.82	109.25
3000.00	.62	62.36	.80	4.42	489.03	436.83	11.25
MAXIMUM BOMB RATE	3125.14						

EFFECTIVE FALLOUT SHEAR .20 KILOMETERS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-9.36	2132.93	14.33	132.76	496112.68	342704.23	1481.25
3.00	-8.36	1867.93	15.17	117.89	328480.70	247280.80	1224.00
10.00	-7.40	1461.27	13.79	84.36	182773.20	188873.82	939.25
30.00	-6.43	1119.50	12.11	59.94	99819.54	123421.77	701.25
100.00	-5.21	757.19	10.51	36.49	43281.63	43788.80	481.25
300.00	-4.03	473.82	8.56	21.45	16789.70	16181.34	271.25
1000.00	-2.29	216.36	5.63	10.32	3841.88	3310.58	99.00
3000.00	.64	51.89	.80	4.60	342.24	349.12	11.25
MAXIMUM BOMB RATE	3168.53						

EFFECTIVE FALLOUT SHEAR .40 KILOMETERS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM UPWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT GROUND	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-9.12	2089.31	16.63	259.29	741226.71	818081.21	1395.00
3.00	-8.35	1632.61	15.42	194.79	453279.69	561800.92	1095.25
10.00	-7.42	1239.57	13.97	134.19	246824.63	282885.76	811.25
30.00	-6.48	906.18	12.58	89.90	118190.68	127647.97	575.00
100.00	-5.29	580.94	10.67	59.87	44452.46	44883.78	360.00
300.00	-4.01	335.89	8.66	26.99	14388.73	14411.89	195.00
1000.00	-2.17	139.28	5.69	11.42	3988.72	2337.77	71.25
3000.00	.72	34.95	.80	4.32	225.58	241.84	11.25
MAXIMUM BOMB RATE	3044.83						

**CALCULATED FALLOUT CONTOURS
FOR BOMB BOMB CONTOURS**

100,000 KILOGRAMS YIELD 0.1 PSI WIND

EXTENSIVE FALLOUT SMOKE .10 FEET PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MINIMUM WINDSPEED FOURTHS	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-22.43	32.29	109.62	109.62	10013.78	10029.02	.00
1.50	-40.95	49.83	104.48	104.48	15240.00	15278.73	.00
20.00	-47.11	47.05	98.93	98.93	14333.58	14371.70	.00
25.00	-44.39	44.22	92.78	92.78	12028.33	12066.63	.00
100.00	-41.12	41.11	85.01	85.01	11000.38	11109.43	.00
150.00	-37.93	37.81	79.34	79.34	9439.42	9479.59	.00
1000.00	-34.16	34.03	71.33	71.33	7622.21	7633.58	.00
1500.00	-30.18	30.11	63.13	63.13	5944.43	5978.73	.00
10000.00	-25.29	25.19	52.70	52.70	4159.85	4163.02	.00
10000.00	-19.57	19.53	40.93	40.93	2493.19	2513.73	.00
MAXIMUM BOMB RATE	10000.00						

EXTENSIVE FALLOUT SMOKE .20 FEET PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MINIMUM WINDSPEED FOURTHS	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-21.53	31.50	154.32	154.32	24073.23	24097.77	.00
1.50	-40.12	40.05	146.85	146.85	22882.94	22847.10	.00
10.00	-46.23	45.13	139.33	139.33	20027.63	20048.15	.00
20.00	-43.42	43.31	129.79	129.79	17631.09	17680.89	.00
100.00	-40.11	40.06	119.91	119.91	15077.06	15096.21	.00
150.00	-36.84	36.73	110.12	110.12	12791.18	12726.12	.00
1000.00	-32.89	32.76	98.28	98.28	10121.75	10133.06	.00
1500.00	-29.79	29.75	86.07	86.07	7764.66	7779.94	.00
10000.00	-23.51	23.47	70.29	70.92	5173.77	5187.25	.00
10000.00	-17.33	17.22	51.06	51.06	2811.71	2815.86	.00
MAXIMUM BOMB RATE	11047.11						

EXTENSIVE FALLOUT SMOKE .40 FEET PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS /HR)	2 MINIMUM WINDSPEED FOURTHS	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT CENTER	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-39.37	59.26	262.62	262.62	41453.52	41515.46	.00
1.50	-47.81	47.79	249.24	249.24	37372.81	37429.72	.00
10.00	-44.83	44.70	233.70	233.70	32823.39	32866.31	.00
20.00	-41.92	41.88	218.56	218.56	28604.02	28779.75	.00
100.00	-38.49	38.35	200.65	200.65	24108.09	24216.45	.00
150.00	-35.05	35.06	182.81	182.81	19951.12	20116.27	.00
1000.00	-30.88	30.77	160.98	160.98	13324.26	13389.14	.00
1500.00	-26.69	26.36	139.09	139.09	11445.44	11461.07	.00
10000.00	-20.42	20.32	107.32	107.32	6939.09	6948.71	.00
10000.00	-13.17	13.04	69.65	69.43	2821.13	2823.99	.00
MAXIMUM BOMB RATE	6394.63						

**CALCULATED FALLOUT CONTOURS
G+1 BOMB RATE CONTOURS**

100.00 KILOGRAMS YIELD 10. HROST WIND

EFFECTIVE FALLOUT SHEAR .10 KILOGS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-35.03	1043.88	61.96	208.91	134001.47	134047.37	675.00
3.00	-32.65	927.59	58.56	177.89	257202.47	260700.07	599.25
10.00	-30.28	801.79	54.99	146.49	100004.32	101461.07	503.25
30.00	-27.77	680.00	50.69	120.21	134047.75	113301.64	419.25
100.00	-24.76	567.45	46.03	94.36	89937.72	87701.70	341.25
300.00	-21.72	459.53	41.76	73.57	58710.65	51612.21	271.25
1000.00	-17.92	343.11	35.52	54.36	33726.63	30706.09	160.00
3000.00	-13.82	244.79	29.18	41.45	17915.73	16010.63	29.25
10000.00	- 8.06	130.83	20.06	29.32	6619.20	6751.63	29.25
30000.00	.32	39.78	.00	12.09	741.97	611.68	15.00
MAXIMUM BOMB RATE	31649.00						

EFFECTIVE FALLOUT SHEAR .10 KILOGS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-36.95	971.44	64.73	170.73	529029.77	500025.01	626.00
3.00	-32.73	856.29	61.16	141.12	395007.11	406670.39	531.25
10.00	-30.10	712.08	56.99	120.73	270795.21	300007.56	461.25
30.00	-27.66	600.97	52.90	100.37	190110.65	200000.00	399.00
100.00	-24.64	502.45	48.02	81.86	119340.67	120720.00	323.00
300.00	-21.50	370.15	43.00	62.94	72673.91	70460.63	239.25
1000.00	-17.77	269.90	36.93	47.15	37636.11	37207.73	160.00
3000.00	-13.63	197.54	30.25	35.18	17094.60	16977.16	99.00
10000.00	-7.80	106.30	20.33	24.20	5730.95	5502.60	29.25
30000.00	1.07	29.01	.00	11.99	567.19	566.50	15.00
MAXIMUM BOMB RATE	30150.00						

EFFECTIVE FALLOUT SHEAR .40 KILOGS PER 1000 FT ALTITUDE

1 BOMB RATE (KILOGRAMS/HR)	2 MAXIMUM DOWNWIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-34.65	890.91	74.69	661.18	879032.57	969379.53	575.00
3.00	-32.44	704.88	70.51	567.44	623989.25	702029.21	503.25
10.00	-29.83	662.73	65.62	432.90	421228.39	470000.00	419.25
30.00	-27.30	553.01	60.81	339.12	278363.26	309121.06	360.00
100.00	-24.26	437.37	55.07	260.39	166561.30	179020.00	271.25
300.00	-21.14	316.55	49.25	177.31	92000.23	90626.39	209.25
1000.00	-17.24	233.72	41.95	113.54	48075.54	46759.31	143.00
3000.00	-13.00	149.61	28.06	68.99	17719.60	17429.05	80.00
10000.00	-6.90	71.99	21.00	39.77	4509.36	4432.50	29.25
30000.00	5.67	14.64	.00	5.46	74.81	174.33	11.25
MAXIMUM BOMB RATE	25702.63						

**CALCULATED FALLOUT CONTOURS
B-1 BOMB BOMB CONTOURS**

100,000 MEGATON YIELD 20. DEGREE WIND

EFFECTIVE FALLOUT SPEED .10 KNOTS PER 1000 FT ALTITUDE

1 BOMB RATE (MEGATONS/HR)	2 MAXIMUM WIND SPEEDS	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-31.50	1941.96	30.57	100.23	90000.00	90000.00	1250.25
3.00	-30.42	1710.87	47.64	150.51	421000.74	430015.50	1000.00
10.00	-26.97	1461.45	44.21	130.54	200071.00	200004.40	920.25
30.00	-24.35	1230.14	40.03	100.00	200073.60	200001.20	755.25
100.00	-21.54	990.30	35.76	70.00	136335.22	120040.10	590.25
300.00	-19.66	788.04	32.62	61.00	83823.60	77337.31	440.00
1000.00	-14.00	543.30	27.37	44.43	44470.40	40014.00	224.00
3000.00	-10.71	370.50	21.40	34.31	20000.20	20000.10	71.25
10000.00	-4.43	150.44	12.10	19.70	4001.12	5070.43	35.00
MAXIMUM BOMB RATE	19000.00						

EFFECTIVE FALLOUT SPEED .20 KNOTS PER 1000 FT ALTITUDE

1 BOMB RATE (MEGATONS/HR)	2 MAXIMUM WIND SPEEDS	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-31.47	1790.20	51.30	330.70	860466.60	950100.40	1100.25
3.00	-30.39	1560.00	48.40	273.73	633171.00	600000.10	1000.00
10.00	-26.93	1334.32	44.91	216.34	400000.00	400000.00	840.00
30.00	-24.51	1100.72	41.46	169.75	280000.00	280000.00	700.25
100.00	-21.60	874.01	37.33	124.63	160000.00	170000.00	550.25
300.00	-19.61	672.16	33.11	89.53	97000.00	97000.00	410.25
1000.00	-14.04	445.19	27.73	50.37	45000.00	44000.00	270.25
3000.00	-10.66	293.22	21.74	37.27	19000.00	17000.00	120.00
10000.00	-4.31	123.36	12.12	20.10	4000.00	4000.25	35.00
MAXIMUM BOMB RATE	10710.00						

EFFECTIVE FALLOUT SPEED .40 KNOTS PER 1000 FT ALTITUDE

1 BOMB RATE (MEGATONS/HR)	2 MAXIMUM WIND SPEEDS	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-31.36	1634.30	34.30	304.56	100000.00	154000.40	1000.00
3.00	-29.26	1400.00	51.32	475.00	600115.22	100000.00	920.25
10.00	-26.60	1187.00	47.90	340.26	61001.97	70000.50	700.00
30.00	-24.37	973.07	43.91	201.03	400101.65	40000.50	620.00
100.00	-21.44	743.62	39.40	100.17	22000.50	23000.50	400.00
300.00	-19.43	553.01	34.06	133.00	11000.20	12000.30	360.25
1000.00	-14.62	364.07	29.21	81.00	4700.00	4000.10	220.00
3000.00	-10.37	213.65	22.72	43.00	1600.12	1600.00	100.25
10000.00	-3.60	81.20	12.13	21.10	200.00	200.00	20.25
MAXIMUM BOMB RATE	17000.00						

**CALCULATED FALLOUT CURVES
301 HOGG BARR CONCRETE**

100,000 SQUARE FEET 40. WEST WIND

EFFECTIVE FALLOUT CURVE .10 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (MREM/HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-26.72	3333.16	43.09	160.49	939710.63	937976.39	2303.00
3.00	-26.63	3133.64	40.43	140.70	626970.97	628261.69	1979.25
10.00	-22.59	2541.79	37.30	111.99	474236.60	469694.93	1639.25
30.00	-20.37	2201.63	36.19	88.90	322661.57	319266.84	1331.25
100.00	-17.66	1732.91	30.43	67.04	197886.24	184130.46	991.25
300.00	-16.87	1420.44	26.53	50.40	116349.17	103710.71	649.25
1000.00	-11.24	887.31	21.66	37.83	52639.57	53393.37	160.00
3000.00	-7.02	504.53	15.44	25.75	26699.58	26601.76	153.25
10000.00	.24	104.52	.80	11.61	1646.46	1909.79	24.00
MAXIMUM DOSE RATE	10720.24						

EFFECTIVE FALLOUT CURVE .20 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (MREM/HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-26.71	3309.12	43.39	292.79	1612506.47	1594160.89	2161.25
3.00	-26.62	2937.40	40.63	330.79	1066196.82	1066003.87	1846.00
10.00	-22.59	2373.61	37.48	183.18	612815.12	604621.63	1500.00
30.00	-20.35	1956.77	36.36	141.69	421167.18	407302.47	1226.00
100.00	-17.45	1464.03	30.57	100.71	237156.18	229120.92	929.25
300.00	-16.83	1205.00	26.63	69.71	126319.82	122733.31	649.25
1000.00	-11.22	714.94	21.53	43.48	53161.72	49299.29	360.00
3000.00	-7.90	394.63	15.49	26.86	17702.69	16932.68	153.25
10000.00	.39	93.61	.80	11.59	1663.92	1710.19	24.00
MAXIMUM DOSE RATE	10439.12						

EFFECTIVE FALLOUT CURVE .40 HOURS PER 1000 FT ALTITUDE

1 DOSE RATE (MREM/HR)	2 MAXIMUM WIND POSITION	3 MAXIMUM DOWNWIND DISTANCE	4 CROSSWIND HALFWIDTH AT ORIGIN	5 MAXIMUM CROSSWIND HALFWIDTH	6 ACTUAL AREA	7 ESTIMATED AREA ELLIPSE	8 RANGE TO MAXIMUM WIDTH
1.00	-26.68	3024.86	44.16	312.13	2210701.10	2204831.59	1979.25
3.00	-26.78	2379.49	31.43	409.83	1329216.46	1274344.79	1640.00
10.00	-22.54	2104.65	33.21	399.43	945017.41	1024006.31	1360.00
30.00	-20.31	1687.41	35.01	229.32	568434.22	613159.44	1030.00
100.00	-17.60	1234.39	31.14	136.99	292093.76	309432.81	811.25
300.00	-16.79	890.24	27.13	100.32	139571.29	142903.01	551.25
1000.00	-11.15	539.43	21.99	36.12	49333.92	49333.92	183.25
3000.00	-6.91	276.96	15.67	29.43	13770.91	13121.71	131.25
10000.00	.52	70.48	.69	11.53	1249.60	1203.86	19.25
MAXIMUM DOSE RATE	10434.67						